



# Franke representatives acting worldwide for our customers

## Germany

**Michael Topf, Ingenieur**  
Rheinstraße 7  
15732 Eichwalde  
Tel. 030 / 67539783  
Fax 030 / 67539784  
Mobiltel.: 0172 / 3064469  
Michael.Topf@t-online.de

**IGM GmbH  
Ingenieurbüro Müller**  
An der Schäferlei 4,  
37327 Leinefelde  
Tel. 03605 / 512158  
Fax 03605 / 502261  
Mobiltel.: 0171 / 8700680  
igm@igmgbh.de  
www.igmgbh.de

**Ingenieurbüro R. Krone**  
Herbert-Ludwig-Str. 14,  
28832 Achim  
Tel. 04202 / 976910  
Fax 04202 / 976911  
Mobiltel.: 0171 / 2117778  
info@krone-filter.de

**Günter Horl GmbH**  
Friedrich-Ebert-Str. 239,  
47800 Krefeld  
Tel. / Fax 02151 / 598550  
Mobiltel.: 0172 / 2779089  
Guenter\_Horl\_GmbH@t-online.de


**Ingenieurbüro Lothar Meyer**  
Pfalzstraße 5  
65329 Hohenstein  
Tel. 06128 / 450080  
Fax 06128 / 450079  
Mobiltel.: 0172 / 8284128  
LotharMeyer@web.de

**Diethart Habel, Ingenieur**  
Fichtenstraße 24,  
73732 Esslingen  
Tel. 0711 / 378730  
Fax 0711 / 378737  
Mobiltel.: 0171 / 7282513  
habel@t-online.de

**Hans J. Dallmann  
Industriervertretungen**  
In den Linden 94,  
74379 Ingersheim  
Tel. 07142 / 51949  
Fax 07142 / 52194  
Mobiltel.: 0172 / 6600891  
hjdallmann@t-online.de

**Volker Scherreim**  
Dorfweg 12 Hemhof,  
83093 Bad Endorf  
Tel. 08053 / 9058  
Fax 08053 / 3593  
post@scherreim.de  
www.Scherreim.de

**Ingenieurbüro Schmidt &  
Partner**  
Waldstraße 11  
91217 Hersbruck  
Tel. 09151 / 830838  
Fax 09151 / 830839  
Schmidt-BM@t-online.de

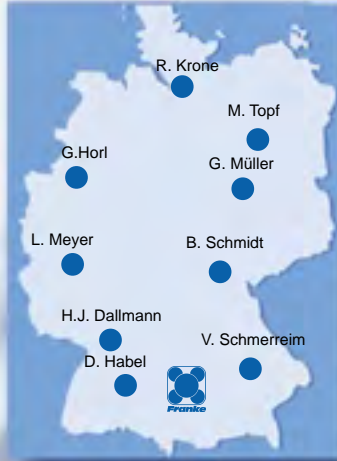

## Europe

**A Büll & Strunz**  
Brown Boveri Straße 8, Stiege 1/1  
A-2351 Wiener Neudorf  
Tel. 00431 / 31913890  
Fax 00431 / 3191363294

**B/ Eltromat B.V.  
NL** Industrieweg 14a / Postbox 75  
NL-4760 AB Zevenbergen  
Tel. 0031168 / 373730  
Fax. 0031168 / 373738  
emat @ eltromat.com

**CH Vögelin AG**  
Rinaustraße, Postfach  
CH-4303 Kaiseraugst  
Tel. 004161 / 8169016  
Fax 004161 / 8169000  
cgs@voegelinag.ch

**CZ Betz s.r.o.**  
Zeyerova 6/234  
CZ-35301 Mariánské Lázně  
Tel. 00420 / 165620095  
Fax 00420 / 165620095  
betz@betz.cz  
www.betz.cz

**E Vorkauf Sociedad Anonima**  
Avda. Comandante Franco, 3  
E-28016 Madrid  
Tel. 00341 / 3591712  
Fax 00341 / 3500431  
Vorkauf@vorkauf.es  
www.vorkauf.es


**F C.T.I.**  
43 Rue Raspail  
F-92594 Levallois-Perret Cedex  
Tel. 00331 / 55210704  
Fax 00331 / 55210701  
franke@cti.fr

**GB Schleifring Systems LTD**  
Abex Road, Newbury  
GB-Berkshire, RG 14 5EL  
Tel. 00441635 / 36363  
Fax 00441635 / 38334  
amanahan@schleifring.co.uk

**I Meccanica Cuorgne SRL**  
Via Cav. Vallero Pietro, 9  
I-10080 Salassa  
Tel. 0039124 / 36336 - 36398  
Fax 0039124 / 36185  
franke @ mcsrl.com

**P Iberacero S.L.**  
Lote 45 - Lugar do Queiro Gemunde  
P-4470 Maja  
Tel. 00351 / 229479020  
Fax. 00351 / 229479029  
iberacero @ mail.telepac.pt

**S / BENTSSONS MASKIN AB  
DK** Företagsvägen 14  
Box 501  
23224 Arlöv  
Tel. +46 40 6807300  
Fax. +46 40 430271  
www.bengtssons-maskin.se  
info.transmission@bengtssons-maskin.se

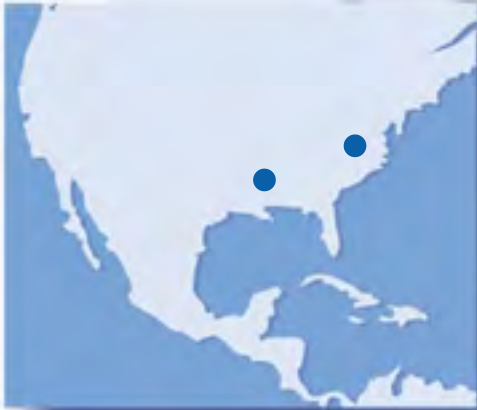

## USA Kanada

**Wälzlager** **Rotek Incorporated**  
1400 South Chillicothe Rd.  
P.O. Box 312  
Aurora, Ohio 44202 - 9299  
Tel. 001330 / 5624000  
Fax. 001330 / 5627394  
Sales@rotek-inc.com

**Linearführungen  
Positioniersysteme** **Hoerbiger Origa Inc.**  
100 Westlake Drive  
Glendale Heights  
USA 601391L  
Tel. 001 / 6308718300  
Fax 001 / 6308711515  
www.hoerbiger-origa.com



## South America

**UNITEC**  
Eduardo Carvalho  
Av. Afonso Pena 2770- Sala 902  
30.150.310 Belo Horizonte MG  
Brasil  
Tel. 0055 / 31/32824588  
Fax 0055 / 31/32214088  
carvalho@unitec.it  
www.unitec.it

## Israel

**American Aviation Ltd.**  
Keidar Center,  
Haharoshet Street 19  
Industrial Zone,  
IL-Raanana 43101  
Tel. 009729 / 7487826  
Fax 009729 / 7487830  
avi@amav.co.il



## Asia

**Neel kamal**  
K.R.Road  
Bangalore, 560 004 India  
Tel. 0091 80 6620532  
Fax 0091 80 6620400  
rajasa@blr.vsnl.net.in

**John Enterprise Co.**  
4 Fl., No. 406  
Nanking W. Road  
Taipei, Taiwan R.O.C.

**Numacs Co. Ltd**  
Rm 303, Namdong building 987-11  
Mansu-dong, Namdong-ku  
405-240 Incheon  
Südkorea  
Tel. +82(0)32-461-8110  
Fax +82(0)32-461-8112  
casypark@unitel.co.kr




## Australia

**Gecam Industries**  
Unit 12 / 10 Pioneer Ave  
Thornleigh NSW 2120,  
Australia  
Tel. 0061 / 0294841477

# Our programme

## Antifriction wire race bearings


<b>General information, application samples</b>			4 - 11
<b>Bearing elements</b>	Series LEL	with ground races	12 - 13
	Series LER	with drawn races	14 - 15
	Series LED	with ground races	16 - 17
	Series LED	with drawn races	16 - 17
	Series LDD	slim bearing	18 - 19
<b>Bearing assemblies</b>	Series LDL	steel version	20 - 21
	Series LDL	aluminium version	22 - 23
	Series LDV	preferential series	24
<b>Accessories</b>			25
<b>Technical information</b>			26 - 29

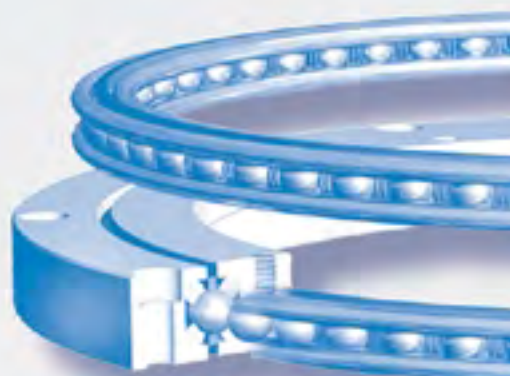

Antifriction wire race bearings

## Linear guides

<b>General information, application samples</b>				30 - 37
<b>Aluminium roller guides</b>	Series FDA	FEA	Standard	38 - 39
	Series FDB	FEB	LowCost	40 - 41
	Series FDC	FEC	Non corrosive Standard	42 - 43
	Series FDD	FED	Anti-magnetic	44 - 45
	Series FDE	FEE	Without lubricant	46 - 47
	Series FDF	FEF	Elastic Roller	48 - 49
	Series FDG	FEG	Non corrosive LowCost	50 - 51
	Special series			52 - 53
<b>Pair of single rails / double rail</b>	Series FDA	FEA	Standard	54 - 55
	Series FDC	FEC	Non corrosive	56 - 57
	Series FDD	FED	Anti-magnetic	58 - 59
<b>Accessories</b>				60 - 61
<b>Technical information</b>				62 - 65

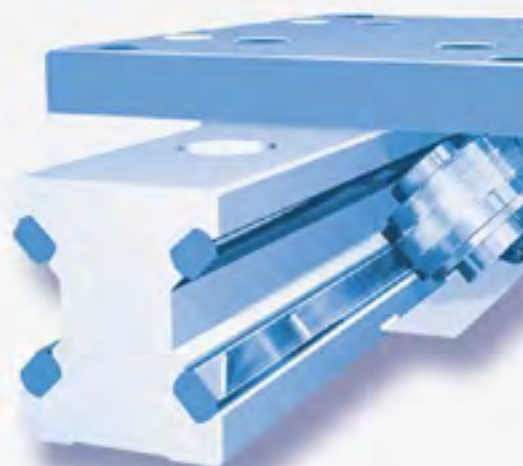

Linear guides

## Positioning systems

<b>General information, application samples</b>				66 - 69
<b>Linear modules</b>	Series TLP	with toothed belt drive		70 - 71
	Series TLH	with metal cover		72 - 73
<b>Linear table</b>	Series TLX	with linear motor		74 - 75
	Series TLA	with metal cover		76 - 77
	Series TSL	Heavy duty series		78 - 79
<b>Sliding tables</b>	Series TFR...A / G	Open / closed		80 - 83
<b>Carriage slides</b>	Series TFS...B			84 - 85
<b>Rotary tables</b>	Series TSD...A TSD...M			86 - 88
<b>Motorisation</b>	Servo motors, Stepping motors			89
<b>CNC-control</b>	One axes / Multi axes			90 - 91
<b>Accessories</b>	Series TLH			92 - 93
<b>Application</b>	Series TLH			94
<b>Accessories</b>	Series TLP			95 - 96
<b>Technical information</b>				97 - 99
<b>Our team, how to find us, eshop</b>				100 - 101



Positioning systems




# Application samples antifriction bearings

*Franke bearings have a proven track record in daily operation in numerous applications and markets. In all cases where the Franke bearing system is incorporated consequently into the design, cost effective solutions result.*


*The special advantages of the bearings are the space saving design together with high load capacities for loads from whatever direction. The balls run on tough rings from spring steel which are embedded in the mating structure. Load capacity and running behaviour are therefore independent from the material of the mating structure, giving the machine designer a wide range of materials from which to choose.*

*Numerous series add up to a wide selection range from the LowCost version to slim bearings and special solutions such as our angular ball bearings for CT-scanners.*

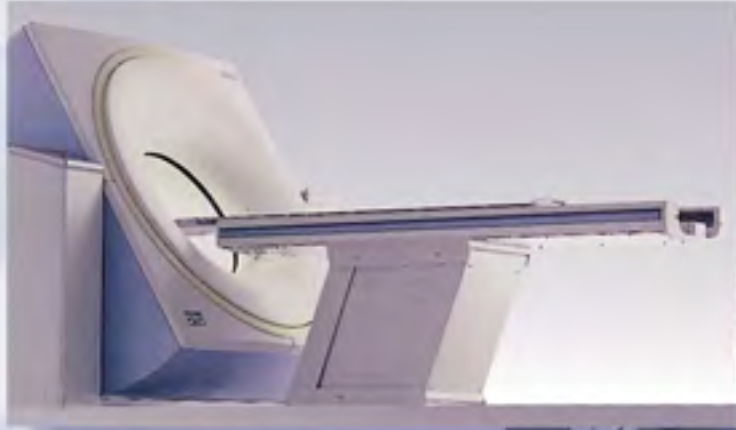

*The computer tomograph is equipped with a low-noise Franke bearing. This patented bearing was developed particularly for this purpose; its special merits are very smooth and silent running, low current consumption, and high precision.*

*(Photo Siemens)*

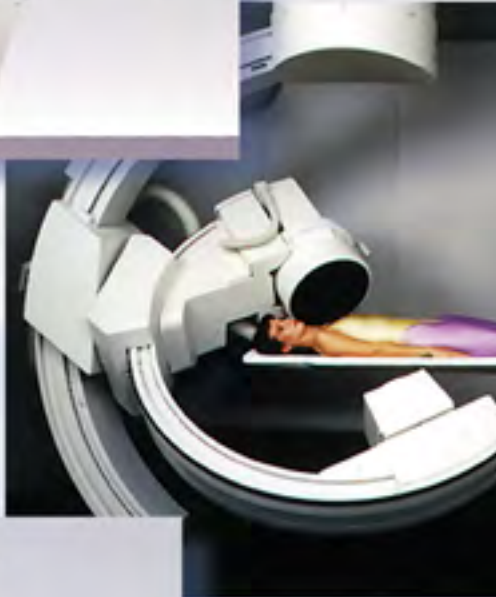


*Franke bearing assembly supporting an x-ray apparatus. Both C-arms of the x-ray apparatus are resting on a swivelling bearing assembly. We supply the bearing assemblies complete with gears.*

*(Photo Siemens)*



*Franke bearing elements in a vacuum-filler in food industries. Due to the space saving design and low prices the vacuum-filler can be designed small and economical.*


*(Photo Schnell)*

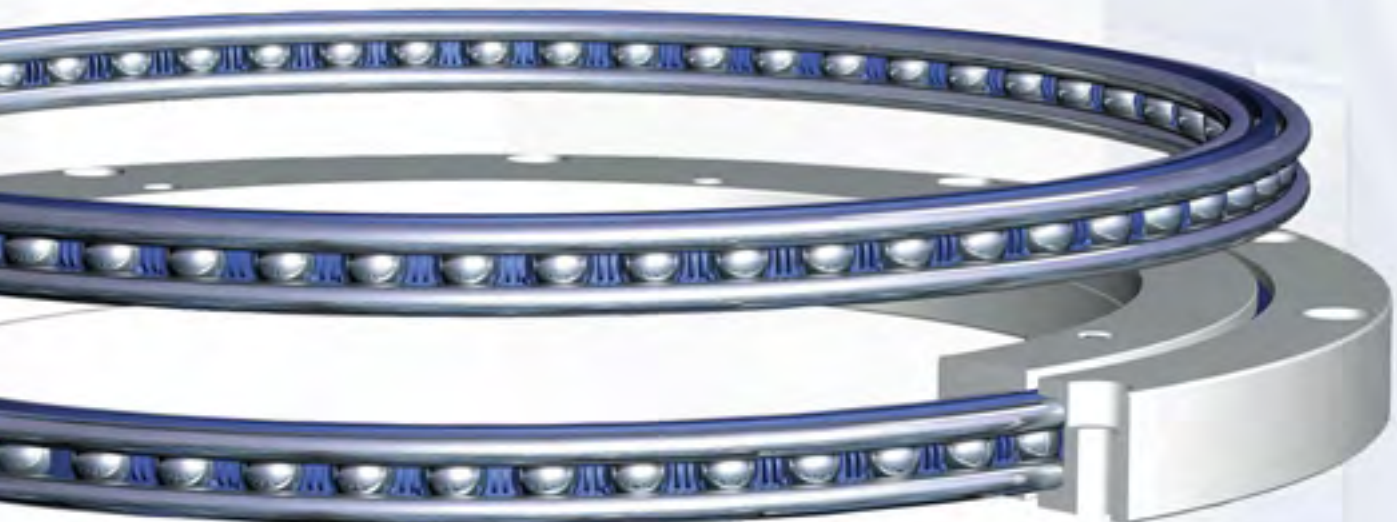



*Franke bearing elements in a medical ceiling system. Easy manual swivelling movements in spite of heavy loads.*

*(Photo Pneumatik)*

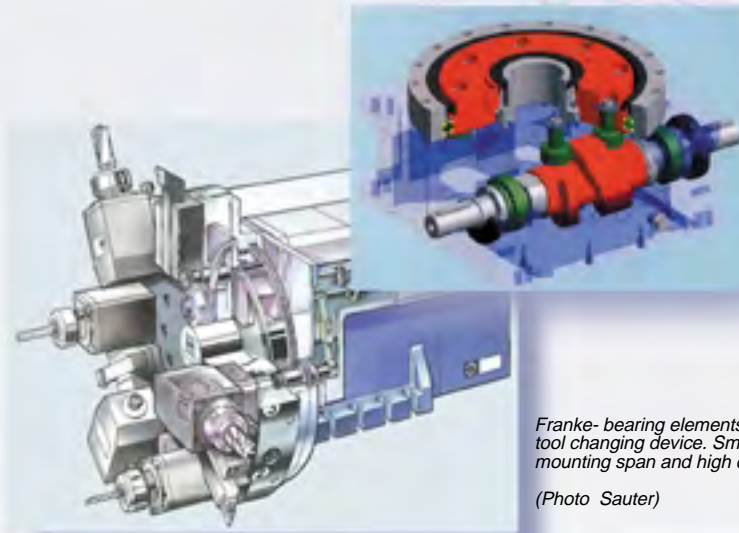

*Franke bearing element in an indexing table. High moment loads under rough conditions.*

*(Photo Taktomat)*

*Franke-bearing elements in a tool changing device. Small mounting span and high capacity*

*(Photo Sauter)*




*Franke bearing assembly in a welding machine. High radial and axial accuracy for best welding results.*

*(Photo Nothelfer)*

*Circular knitting machine. The Franke bearing assembly has an excellent adaptability to changing thermal conditions, thus allowing high speeds with low energy consumption.*

*(Photo Mayer & Cie.)*

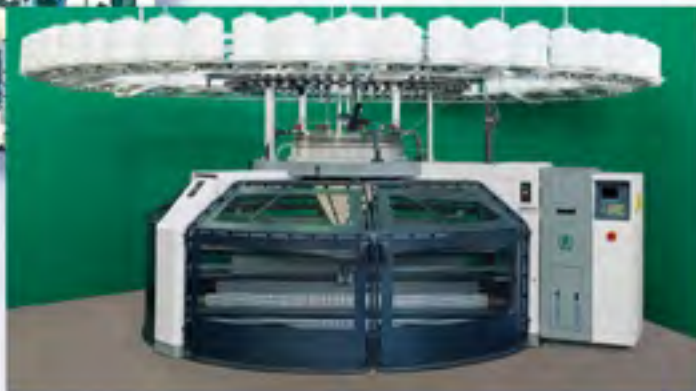




# Survey antifriction bearings

Running accuracy  
Circumferential speed  
Radial and axial accuracy  
Rotational resistance

Bearing elements

Series

Features

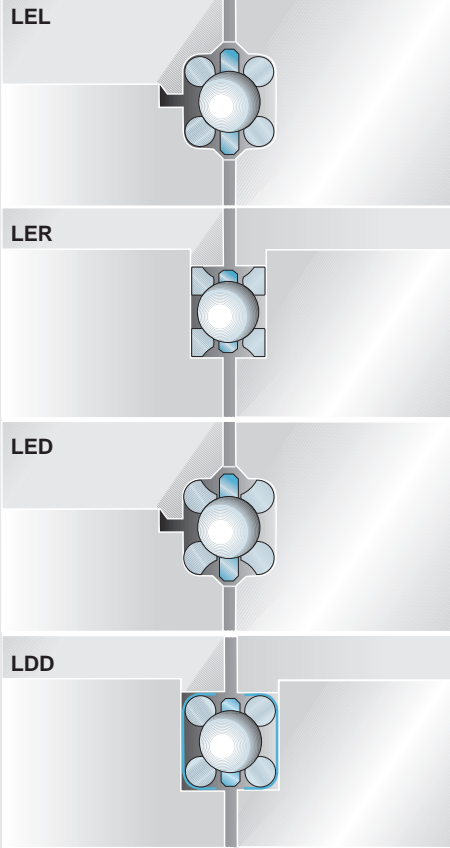

*the Universal*

Ground raceways made of spring steel for highest loads and accuracy.



LER

*the Economical*

Rectangular profil with drawn raceways for easy machining of the mating structure and low price.



LED

*the Double profiled*

Either ground or drawn raceways for high loads and precision, very cost-effective.




LDD

*the Easy-to-mount*

Slim bearings with metal sleeves for easy mounting in one piece. Ground raceways for high loads and high precision.



Bearing assemblies

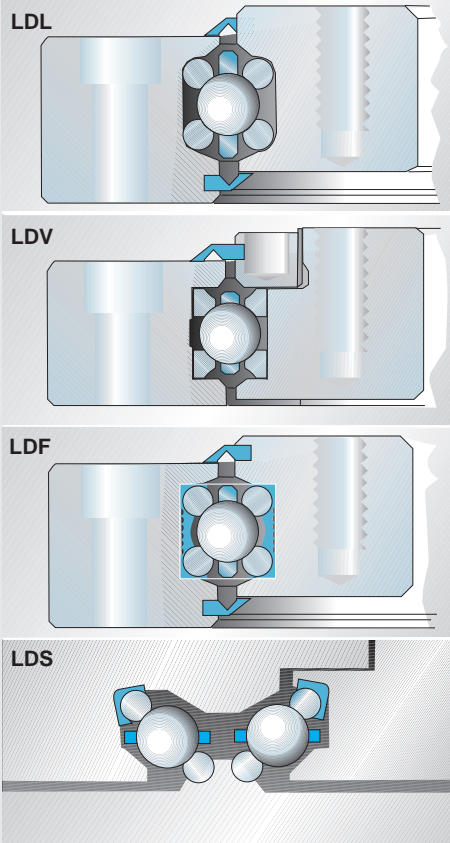

LDL

*the Ready-to-use*

Complete bearing assembly with seal on both sides, ground raceways for high loads and precision.



LDV

*the Preferential*

Complete bearing assembly with seal on top and rectangular raceways with drawn surface, very cost-effective.



LDF

*the Silent*

Complete bearing assembly with bearing element embedded in elastomer for very smooth and silent run.



LDS

*the Special*

Complete bearing assembly in customized design to match the special requests of the customer such as noise reduction, high revolutions, high accuracy.





Diameter [mm]	Cross section [mm]	Load rating range [kN]	Page	Accessories	Page
5,9 x 5,9 7,4 x 7,4 9,2 x 9,2 10,6 x 10,6 14,1 x 14,1 18,4 x 18,4 22,6 x 22,6			12-13	<b>Strip cage</b> 	25
11 x 13			14-15	<b>Washers</b> 	25
12,86 x 12,86 12,95 x 12,95 13,19 x 13,19 14,61 x 14,61			16-17	<b>Seal</b> 	25
9,525 x 9,525 12,700 x 12,700 19,050 x 19,050 25,400 x 25,400			18-19		
			20-21		
			22-23	<b>with gear</b> 	23
on request		on request	8-11		
on request		on request	8-11	<b>Alternative materials</b>	



# Bearing assemblies as low noise bearing

Your benefit:

- High load capacity*
- Silent running*
- Low structure-borne noise*
- Free selection of dimensions*
- Choice of different versions*


## Series LDS

Bearing assemblies of the low noise type and double row angular bearings are bearings which are ready for installation meeting even the highest requirements concerning easy run, low noise and precision.

In the last few years we have supplied more than 5000 central bearings for computer tomographs worldwide. All the famous manufacturers from this branch have realized the advantages of the Franke system and are using them consequently.

Here we can give you only a short survey on the different bearing types. The application possibilities are too versatile, the desires are too different.

All dimensions (height, width, bore configuration, etc.) are determined according to the customer's desires and requirements. We produce antifriction bearings of these types in the diameters from 500 - 1600 mm.

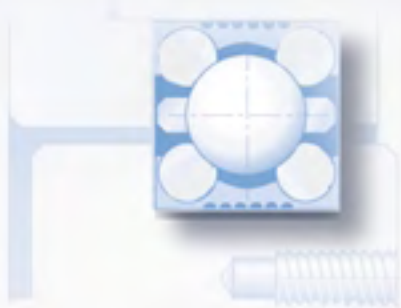

## Two-sided elastomer bearing

The development of this bearing was aimed at obtaining very silent run and low structure-borne noise. For this purpose the race rings were manufactured with high surface quality and embedded in an elastomer. The rotational resistance was adjusted according to the application.

This invention was patented. The bearing proved to be successful in the CT sector and is suitable for speeds up to 6m/s. The inner ring is electrically insulated against the outer ring.



## One-sided elastomer bearing (hybrid bearing)

This bearing was developed on the basis of the low-noise bearing but it differs from that by its additional stiffness. Regarding smooth and silent run both bearings are nearly equal. The hybrid bearing is mainly used in cases where high loads and moments are to be sustained. The inner ring is electrically insulated against the outer ring.

# Bearing assembly as double row angular ball bearing

We supply all data according to specification.

RPMs, radial and axial accuracy as well as airborne and structure-borne noise can be documented and supplied with each bearing.

On request our bearings are tested in longtime run, here stiffness against tilt and lifetime are investigated. In addition we make detailed calculations.

Please benefit from our 50 years' experience in the production of antifriction bearings.

## Angular ball bearing compact design



Especially for small mounting space we recommend our new compact designed angular ball bearing. With a cross section of 1x2 inches it meets the dimensions of standard bearings and combines high stiffness and precision with silent running even with high revolution.

In all applications where usually two bearings are required to take the loads and moments our new compact bearings can replace them both.




## Angular ball bearing standard

The double row angular ball bearing was developed for CTs with high RPMs. Here 2 rows of balls are running in a defined way. The friction conditions are especially favourable and the bearings are particularly stiff and free from clearance even in the tilted condition.

This bearing type meets very high demands for precision and low running noise.



## Test records

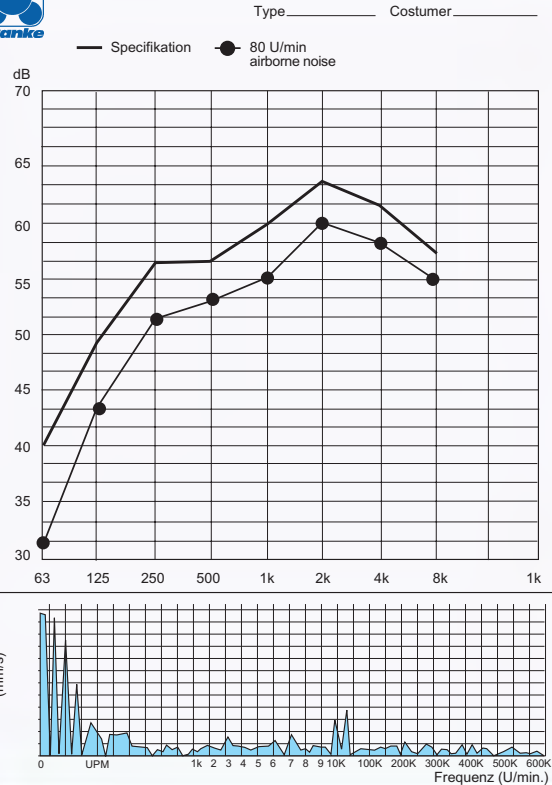

## Angular ball bearing with elastomer inlay

We made good experience with the elastomer inlay from which we want to benefit also for the angular ball bearing. The loudness level was even more reduced by the elastomer, the same is true for the structure-borne noise.

The elastomer is used in the stationary ring. The inner ring is electrically isolated against the outer ring.



## Particular bearing assemblies


Your benefit:

*High load rating*

*High load capacity for loads from any direction*

*Toothed module custom-made*

*On request with driving worm*

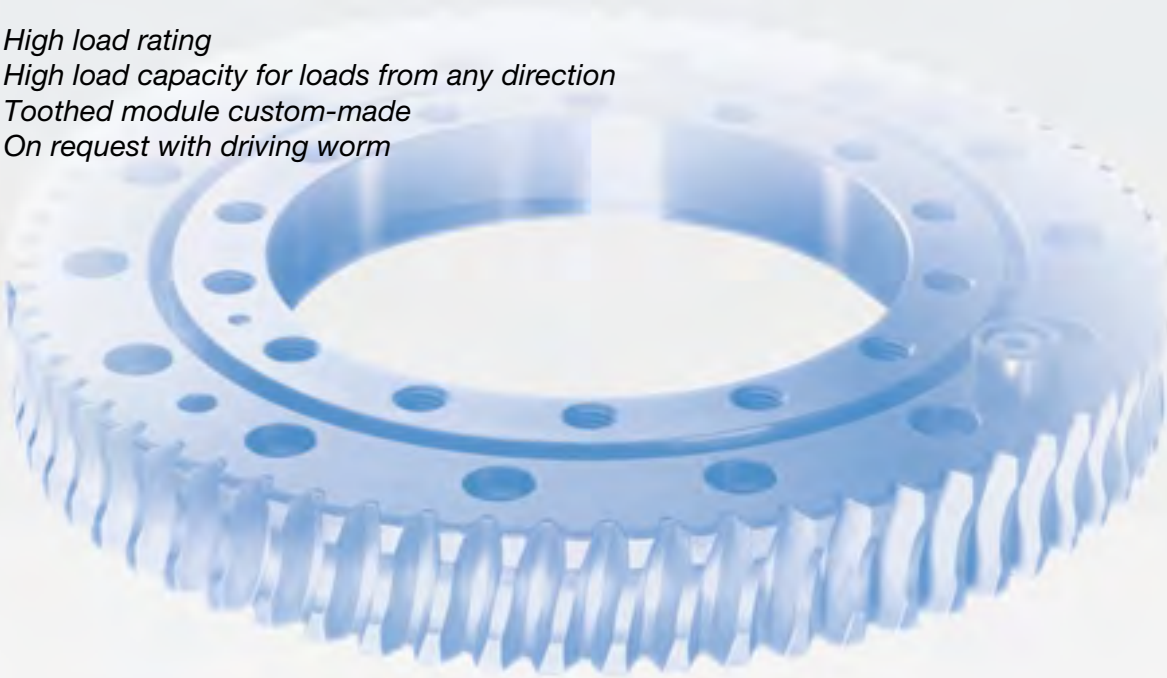

Franke bearing assemblies with gear are used in versatile fields of application. On request we supply our bearing assemblies with inner or outer gear as standard module or according to your indications.

Bearing assemblies with gear can be made of diverse materials. The dynamic and static loads determine the choice of the material as well as the kind of finishing or heat treatment of the bearing rings.

We make bearing rings with gear either of steel C45N or 42CrMo4V. Any other materials are possible on request.

Module, number of teeth, material, and heat treatment as well as any other special manufacturing details are determined by the field of application and the force which has to be transmitted.



The bearing assembly shown in this picture is used in a C-bow x-ray device where the radiation arm is slewing around the patient. We supply the complete bearing inclusive the driving worm.

# Alternative materials

Your benefit:

Adaptation to your design

Special material features

(light construction, non-corrosive steel etc.)

High load rating and precision independent from the material chosen

## Bearing assemblies

Version	Material	Suited for
Standard	C45N	almost all application in the construction of machines and devices
Gear	42CrMo4V	Bearing assembly with driving worm and pinion
Aluminium	AlZnMgCu0,5	Light construction and homogenous application of material in an aluminium environment
Stainless steel	X5CrNi18.10	for corrosive environment and in the food industry
Diverse alloys	e.g. GZ-CuSn12	Highest precision requirements
Plastic	Diverse Materias	Applications with high requirements for light construction and corrosionresistance

## Bearing elements

Version	Material	Suited for
Standard 54SiCr6	Fedra Sorte C,	Nearly all applications in the construction of machines and devices
Niro	X12CrNi177 X7CrNi177	for corrosive environment as well as in the food industry
Duratherm	600F1450	High-vacuum

On request Franke bearing assemblies are available in diverse materials. This allows to select the compound which is most suited to your construction.

Precision and load rating of the selected bearing are to a high degree independent from the material which was chosen for the mating structure. This becomes possible due to the Franke system where the rolling elements run on tough ground race rings.

This guarantees high performance under any condition of application. Whether you chose non-corrosive steel, antimagnetical material or material which is suited for clean-room conditions or for the food industry: Franke bearing assemblies can be adapted to all requirements.

Please consult us, we are gladly prepared to advice you.

### For example non-corrosive steel:

Corrosion resistant bearing assemblies for the application in an especially humid environment.

### For example aluminium:


Light bearing rings for light-weight design.


### For example bronze:

High-strength alloys for very high precision and fatigue resistance.


### For example plastic:

Bearing rings of penetration-dyed plastic for the optical adaptation of the bearing to special materials ( e.g. glass fibre, coil fibre, etc.)

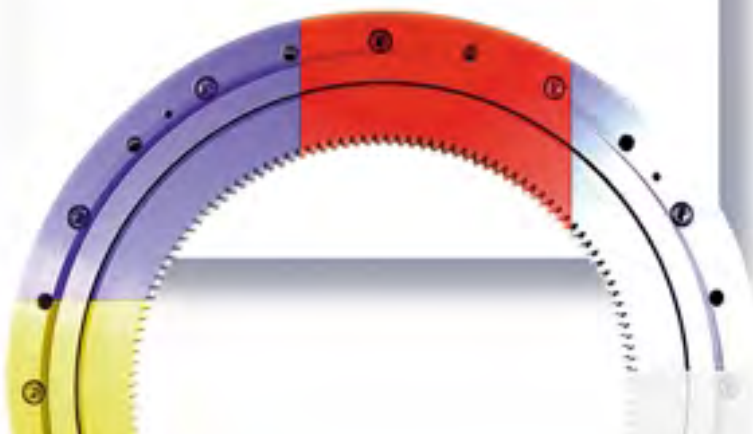



## Series LEL

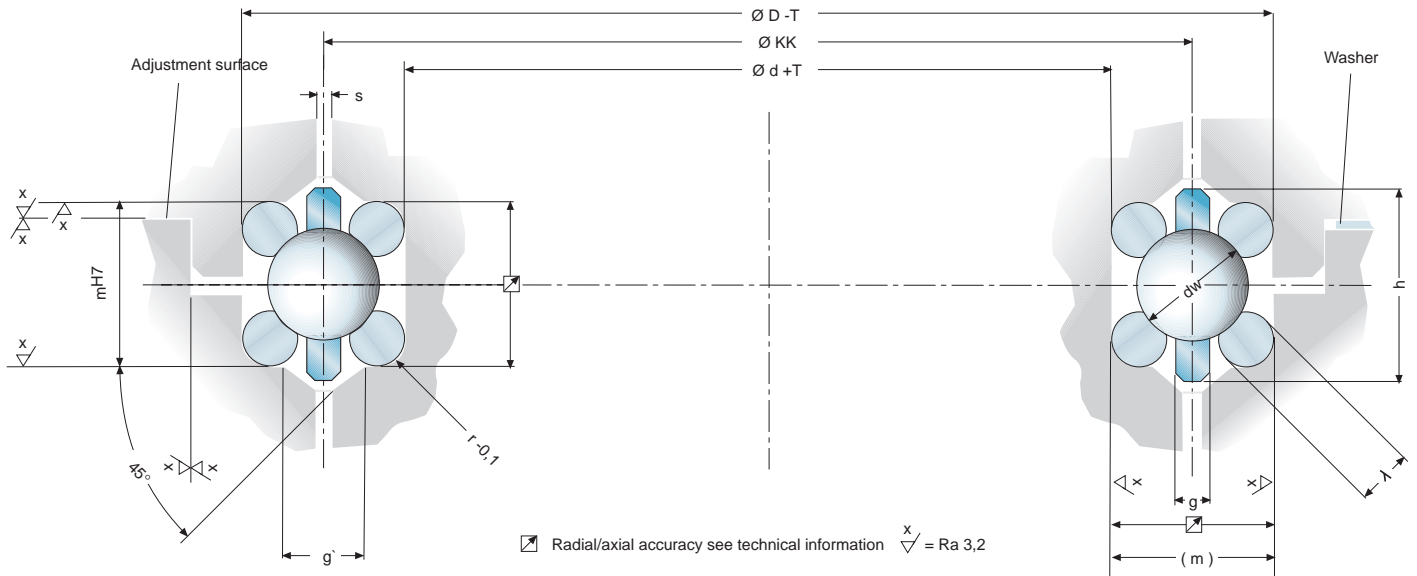

Ø KK	d <sub>w</sub>	λ	m	r	g	h	g'	s	Tolerance T
70 - 145	5	1,5	5,9	0,65	1,5	7,6	-	2,6	KK Ø ≤ 500 mm T = (IT6*) / 2 KK Ø ≥ 500 mm T = (IT7*) / 2
150 - 220	6	2,0	7,4	0,90	1,6	8,6	-	2,6	
225 - 295	8	2,5	9,2	1,15	2,0	10,6	4,0	1,4	
300 - 390	9	3,0	10,6	1,40	2,0	11,6	3,5	1,6	
400 - 790	12	4,0	14,1	1,90	2,5	15,0	4,5	2,0	
800 - 1180	16	5,0	18,4	2,40	3,0	19,6	5,5	2,0	
1200 - 1500	20	6,0	22,6	2,90	3,5	24,2	6,5	3,0	

Dimensions [mm], \* DIN ISO 286

### Consists of:

- Four ball race rings with ground raceways
- Segmented strip cage with retained balls

### Features:

- Direct integration into your mating structure
  - Free selection of ball pitch
  - Smallest mounting space and high precision
  - Best radial and axial accuracy
  - Calculation program to find the best suitable bearing
- Our calculation program can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

### Ball race rings:

- Standard diameters from 1,5 to 6mm
- Special diameters up to 22 mm

For special applications other race ring diameters or race rings without raceways are also available. Please consult us.

### Rolling elements:

- Steel balls DIN5401, class III

### Strip cage:

- Ball guided polyamide ball cage divided into segments
- The segmented strip cage runs very smooth and silent and equalizes length differences caused by high temperatures. The number of segments refers to the ball pitch diameter. For special applications and temperatures higher than 120° C we recommend ball cages made of non-corrosive steel or brass.

### Lubrication:

- with ball bearing grease. For more information see page 27.

### Temperature:

- Continuous operation: -40° C to +100° C, short time operation max. 120° C

Other temperatures on request


### Adjustment:

- By plane surface
- By washers (see page 25)

The preload is adjusted correct when the rotational resistance without seal corresponds to table 1 (temperature range -40° C to +100° C).


### Circumferential speed:

- with grease lubrication max. 10 m/s
- with oil lubrication max. 12 m/s

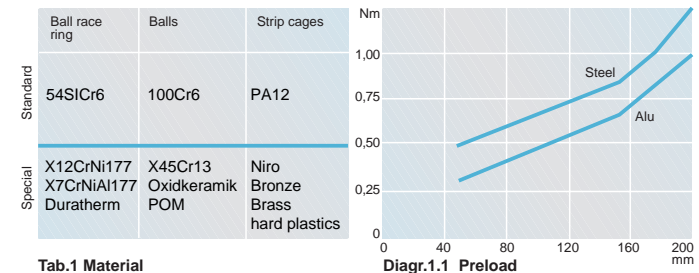

Tab.1 Material


Diagr.1.1 Preload

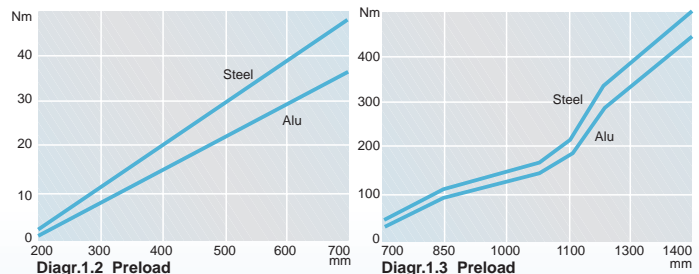





Ball pitch Ø KK [mm]	Load rating		Weight [kg]	Order number
	C [KN]	Co [KN]		
70	4	5	0,03	71001A
75	4	5	0,03	71003A
80	4	6	0,03	71005A
85	4	6	0,03	71007A
90	4	6	0,04	71009A
95	4	7	0,04	71011A
100	4	7	0,04	71013A
105	4	7	0,04	71015A
110	4	8	0,04	71017A
115	4	8	0,04	71019A
120	4	9	0,04	71021A
125	4	9	0,05	71023A
130	5	9	0,05	71025A
135	5	10	0,05	71027A
140	5	10	0,05	71029A
145	5	10	0,06	71031A
150	9	19	0,09	71033A
155	9	19	0,09	71035A
160	10	20	0,09	71037A
165	10	20	0,09	71039A
170	10	21	0,10	71041A
175	10	22	0,10	71043A
180	10	23	0,10	71045A
185	10	23	0,10	71047A
190	10	24	0,11	71049A
195	10	24	0,11	71051A
200	10	25	0,12	71053A
205	10	26	0,12	71055A
210	10	26	0,12	71057A
215	11	27	0,13	71059A
220	11	28	0,14	71061A
225	16	49	0,22	71063A
230	16	51	0,22	71065A
235	16	52	0,22	71067A
240	16	53	0,22	71069A
245	17	54	0,22	71071A
250	17	55	0,23	71073A
255	17	56	0,23	71075A
260	17	58	0,23	71077A
265	17	59	0,24	71079A
270	17	59	0,24	71081A
275	17	60	0,25	71083A
280	17	62	0,25	71085A
285	17	63	0,26	71087A
290	18	64	0,27	71089A
295	18	66	0,29	71091A
300	23	93	0,42	71093A
310	23	97	0,50	71095A
320	24	100	0,50	71097A
330	24	104	0,50	71099A
340	24	106	0,60	71101A
350	25	109	0,60	71103A
360	25	113	0,70	71105A
370	25	116	0,70	71107A
380	25	119	0,80	71109A
390	26	122	0,90	71111A
400	43	161	1,00	71113A
410	44	165	1,02	71115A
420	44	170	1,00	71117A
430	44	174	1,10	71119A
440	45	178	1,10	71121A
450	45	182	1,10	71123A

Ball pitch Ø KK [mm]	Load rating		Weight [kg]	Order number
	C [KN]	Co [KN]		
460	46	186	1,10	71125A
470	46	191	1,10	71127A
480	46	195	1,20	71129A
490	47	199	1,20	71131A
500	47	203	1,20	71133A
510	47	207	1,20	71135A
520	48	211	1,30	71137A
530	48	216	1,30	71139A
540	49	220	1,30	71141A
550	49	222	1,30	71143A
560	49	226	1,40	71145A
570	49	230	1,40	71147A
580	50	234	1,40	71149A
590	50	239	1,50	71151A
600	50	243	1,50	71153A
610	51	245	1,50	71155A
620	51	251	1,50	71157A
630	51	255	1,60	71159A
640	51	259	1,60	71161A
650	52	264	1,60	71163A
660	52	268	1,70	71165A
670	52	272	1,70	71167A
680	53	276	1,70	71169A
690	53	280	1,80	71171A
700	53	285	1,80	71173A
710	54	289	1,80	71175A
720	54	293	1,90	71177A
730	54	297	1,90	71179A
740	54	301	2,00	71181A
750	55	305	2,00	71183A
760	55	310	2,00	71185A
770	55	314	2,10	71187A
780	56	318	2,10	71189A
790	56	322	2,10	71191A
800	83	426	3,40	71193A
810	83	433	3,50	71195A
820	84	437	3,50	71197A
830	84	444	3,60	71199A
840	84	447	3,60	71201A
850	85	454	3,70	71203A
860	85	461	3,80	71205A
870	85	464	3,80	71207A
880	86	471	3,90	71209A
890	86	474	4,00	71211A
900	87	481	4,00	71213A
920	87	492	4,10	71215A
940	88	502	4,20	71217A
960	89	512	4,20	71219A
980	89	523	4,30	71221A
1000	90	536	4,40	71223A
1020	91	547	4,50	71225A
1040	91	557	4,50	71227A
1060	92	567	4,60	71229A
1080	93	578	4,70	71231A
1100	93	588	4,80	71233A
1120	94	598	4,80	71235A
1140	95	612	4,90	71237A
1160	95	622	5,00	71239A
1180	96	633	5,00	71241A
1200	121	748	7,50	71243A
1220	122	764	7,60	71245A
1240	123	774	7,80	71247A
1260	124	790	7,90	71249A
1280	124	800	8,00	71251A
1300	125	816	8,20	71253A
1320	126	826	8,30	71255A
1340	126	837	8,50	71257A
1360	127	852	8,60	71259A
1380	128	863	8,80	71261A
1400	129	878	8,90	71263A
1420	129	889	9,10	71265A
1440	130	899	9,20	71267A
1460	130	915	9,40	71269A
1480	131	926	9,60	71271A
1500	132	941	9,60	71273A

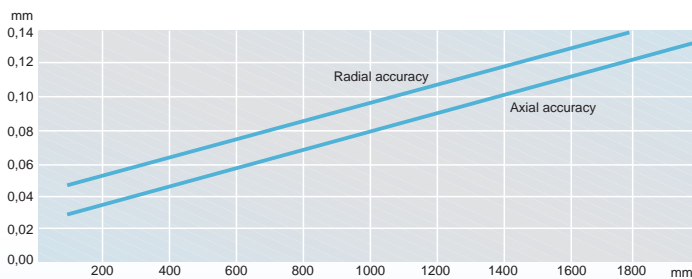



## Series LER

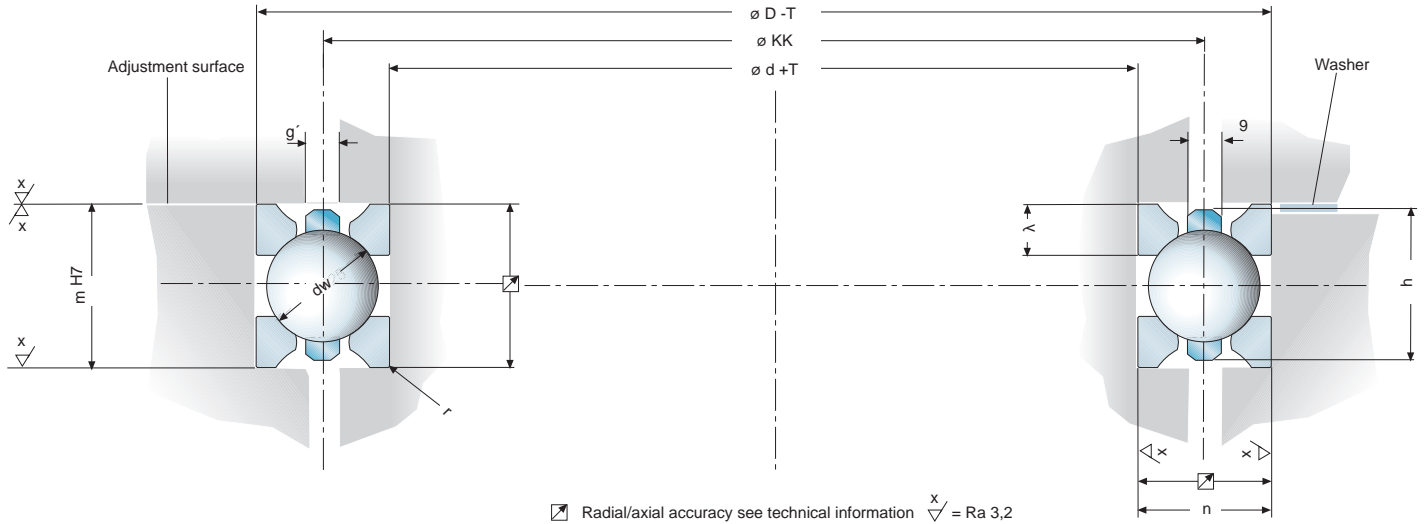

$\varnothing KK$	$dw$	$\lambda$	$m$	$n$	$r \max$	$g$	$h$	$g'$	Tolerance
100 - 1500	9,525	4 x 3	13	11	0,3	2,5	12,6	3	$KK \varnothing \leq 500 \text{ mm } T = IT6^* / 2$ $KK \varnothing > 500 \text{ mm } T = IT7^* / 2$

Dimensions [mm], \* DIN ISO 286

### Consists of:

- Four ball race rings with rectangular raceways
- Segmented strip cage with retained balls

### Features:

- Direkt integration into your mating structure
  - Free selection of ball pitch
  - Smallest mounting space and high precision
  - Easy machining of the mating structure
  - Calculation programm to find the best suitable bearing
- Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

### Ball race rings:

- Rectangular profile 4 x 3 mm
  - Drawn raceways
- For special applications other race ring diameters are also available. Please consult us.

### Rolling elements:

- Steel balls DIN5401, class III

### Strip cage:

- Ball guided polyamide ball cage divided into segments
- The segmented strip cage runs very smooth and silent and equalizes length differences caused by high temperatures. The number of segments refers to the ball pitch diameter. For special applications and temperatures higher than 120° C we recommend ball cages made of non-corrosive steel or brass.

### Lubrication:

- with ball bearing grease. For more information see page 27.

### Temperature:

- Continuous operation: -40° C to +100° C, short time operation max. 120° C

Other temperatures on request

### Adjustment:

- By plane surface
- By washers (see page 25)


The preload is adjusted correct when the rotational resistance without seal corresponds to table 1 (temperature range -40° C to +100° C).

### Circumferential speed:

- with grease lubrication max. 10 m/s
- with oil lubrication max. 12 m/s

	Ball race ring	Balls	Strip
Standard	54SiCr6	100Cr6	PA12
Special	Corrotec ATC-Beschichtung	Messing- Flachkäfig	X45Cr13


Tab.1 Material

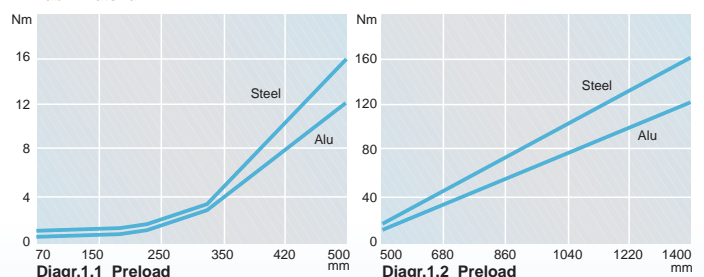




Ball pitch Ø KK [mm]	Load rating		Weight [kg]	Order number
	C [KN]	Co [KN]		
100	17	25	0,20	68460A
105	17	26	0,20	68461A
110	18	28	0,20	68462A
115	18	29	0,20	68463A
120	18	30	0,20	68464A
125	19	33	0,20	68465A
130	19	34	0,20	68466A
135	20	35	0,20	68467A
140	20	36	0,20	68468A
145	20	37	0,20	68469A
150	20	39	0,30	74060A
155	20	40	0,30	74061A
160	20	41	0,30	74062A
165	21	43	0,30	74063A
170	21	45	0,30	74064A
175	21	46	0,30	74065A
180	22	47	0,30	74066A
185	22	48	0,30	74067A
190	22	49	0,30	74068A
195	22	51	0,30	74069A
200	23	52	0,30	74070A
205	23	54	0,30	74071A
210	23	55	0,30	74072A
215	23	57	0,30	74073A
220	24	58	0,40	74074A
225	24	59	0,40	74075A
230	24	60	0,40	74076A
235	24	61	0,40	74077A
240	24	63	0,40	74078A
245	24	64	0,40	74079A
250	25	66	0,40	74080A
255	25	67	0,40	74081A
260	25	69	0,40	74082A
265	25	70	0,40	74083A
270	25	71	0,40	74084A
275	26	72	0,50	74085A
280	26	73	0,50	74086A
285	26	75	0,50	74087A
290	26	77	0,50	74088A
295	26	78	0,50	74089A
300	27	79	0,50	74090A
310	27	82	0,50	74091A
320	27	84	0,50	74092A
330	28	88	0,60	74093A
340	28	90	0,60	74094A
350	28	92	0,60	74095A
360	28	95	0,60	74096A
370	29	98	0,60	74097A
380	29	100	0,60	74098A
390	29	103	0,60	74099A
400	29	106	0,70	74100A
410	30	109	0,70	74101A
420	30	112	0,70	74102A
430	30	114	0,70	74103A
440	31	116	0,70	74104A
450	31	119	0,70	74105A
460	31	122	0,80	74106A
470	31	125	0,80	74107A
480	32	127	0,80	74108A
490	32	130	0,80	74109A
500	32	133	0,80	74110A


Ball pitch Ø KK [mm]	Load rating		Weight [kg]	Order number
	C [KN]	Co [KN]		
510	32	136	0,80	74111A
520	33	138	0,90	74112A
530	33	140	0,90	74113A
540	33	144	0,90	74114A
550	33	146	0,90	74115A
560	33	149	1,00	74116A
570	34	151	1,00	74117A
580	34	155	1,00	74118A
590	34	157	1,00	74119A
600	34	159	1,10	74120A
610	34	162	1,10	74121A
620	35	165	1,10	74122A
630	35	168	1,10	74123A
640	35	170	1,20	74124A
650	35	173	1,20	74125A
660	36	176	1,20	74126A
670	36	179	1,20	74127A
680	36	181	1,30	74128A
690	36	183	1,30	74129A
700	36	187	1,30	74130A
710	36	189	1,40	74131A
720	37	192	1,40	74132A
730	37	194	1,40	74133A
740	37	198	1,50	74134A
750	37	200	1,50	74135A
760	37	203	1,50	74136A
770	38	205	1,50	74137A
780	38	209	1,60	74138A
790	38	211	1,60	74139A
800	38	213	1,60	74140A
810	38	216	1,60	74141A
820	39	219	1,70	74142A
830	39	222	1,70	74143A
840	39	224	1,70	74144A
850	39	226	1,70	74145A
860	39	229	1,80	74146A
870	39	232	1,80	74147A
880	40	235	1,80	74148A
890	40	237	1,90	74149A
900	40	240	1,90	74150A
920	40	246	1,90	74151A
940	40	250	1,90	74152A
960	41	256	2,00	74153A
980	41	261	2,00	74154A
1000	41	267	2,00	74155A
1020	42	272	2,10	74156A
1040	42	278	2,10	74157A
1060	42	283	2,10	74158A
1080	43	289	2,20	74159A
1100	43	293	2,20	74160A
1120	43	299	2,20	74161A
1140	43	304	2,30	74162A
1160	44	310	2,30	74163A
1180	44	315	2,40	74164A
1200	44	321	2,40	74165A
1220	45	326	2,40	74166A
1240	45	332	2,50	74167A
1260	45	337	2,50	74168A
1280	45	343	2,50	74169A
1300	46	347	2,60	74170A
1320	46	353	2,60	74171A
1340	46	358	2,70	74172A
1360	46	364	2,70	74173A
1380	47	369	2,80	74174A
1400	47	375	2,80	74175A
1420	47	377	2,80	74176A
1440	47	386	2,90	74177A
1460	48	390	2,90	74178A
1480	48	396	3,00	74179A
1500	48	401	3,00	74180A

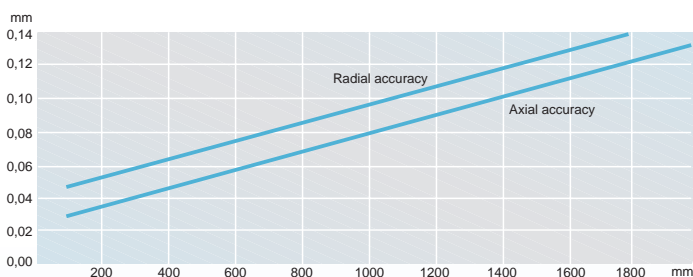

Diagr.2 Radial and axial accuracy



### Series LED

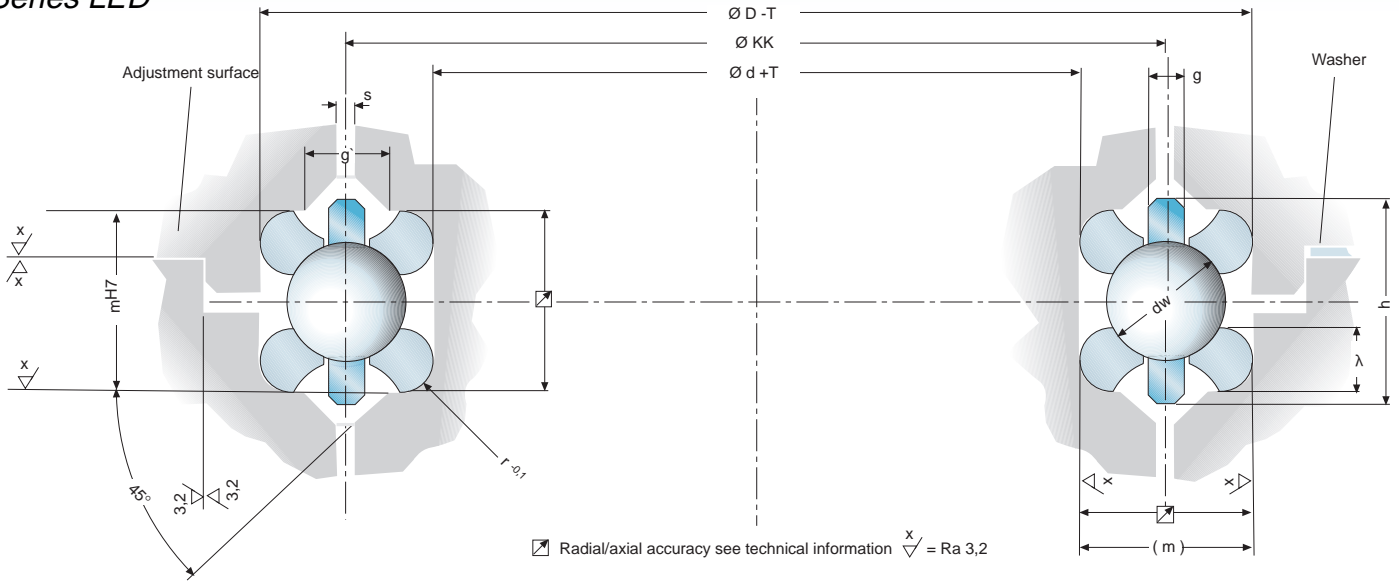

Version	$\varnothing KK$	$d_w$	$\lambda$	$m$	$r$	$g$	$h$	$g^$	$s$	Tolerance T
A	100 - 1500	drawn	9,525	4	12,86	1,9	2,5	12,6	3,5	1,6
B	100 - 1500	ground	9,525	4	12,95	1,9	2,5	12,6	3,5	1,6
C	100 - 1500	ground	10,000	4	13,19	1,9	2,5	13,2	4,0	1,6
D	100 - 1500	ground	12,000	4	14,61	1,9	2,5	15,0	4,5	2,0

Dimensions [mm], \* DIN ISO 286

#### Consists of:

- Four ball race rings with ground resp. drawn raceways
- Segmented strip cage with retained balls

#### Features:

- Direct integration into your mating structure
- Free selection of ball pitch
- Smallest mounting space and high precision
- High radial and axial accuracy with best cost/performance ratio
- Calculation program to find the best suitable bearing

Our calculation program can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

#### Ball race rings:

- Standard diameters 4 mm
- Ground or drawn raceways

For special applications other race ring diameters or race rings without raceways are also available. Please consult us.

#### Rolling elements:

- Steel balls DIN5401, class III

#### Strip cage:

- Ball guided polyamide ball cage divided into segments
- The segmented strip cage runs very smooth and silent and equalizes length differences caused by high temperatures. The number of segments refers to the ball pitch diameter. For special applications and temperatures higher than 120° C we recommend ball cages made of non-corrosive steel or brass.

#### Lubrication:

- with ball bearing grease. For more information see page 27.

#### Temperature:

- Continuous operation: -40° C to +100° C, short time operation max. 120° C
- Other temperatures on request

#### Adjustment:

- By plane surface
- By washers (see page 25)



The preload is adjusted correct when the rotational resistance without seal corresponds to table 1 (temperature range -40° C to +100° C).

#### Circumferential speed:

- with grease lubrication max. 10 m/s
- with oil lubrication max. 12 m/s

Standard	Ball race ring	Balls	Stripe cages
	54SiCr6	100Cr6	PA12
Special	Corrotec ATC-covered	X45Cr13	Brass flat cage


Tab.1 Material

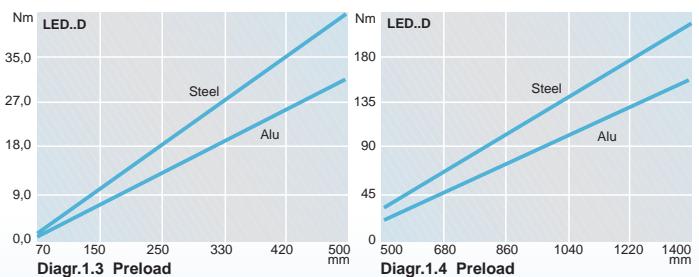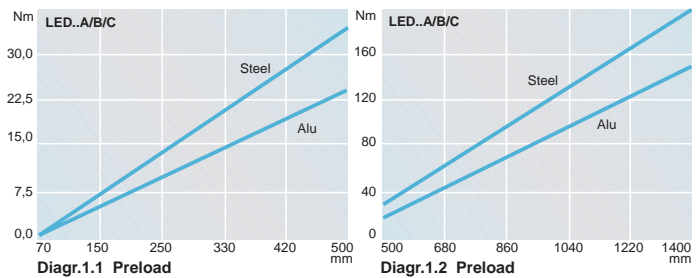




Ball pitch Ø KK [mm]	Load rating						Weight [kg]	Order number			
	A,B		C		D			Version			
	C	Co	C	Co	C	Co		B	A	C	D
100	17	25	22	28	24	30	0,26	68310B	68310A	68310C	68310D
105	17	26	23	30	25	31	0,27	68311B	68311A	68311C	68311D
110	18	28	23	31	26	33	0,27	68312B	68312A	68312C	68312D
115	18	29	24	33	26	35	0,28	68313B	68313A	68313C	68313D
120	18	30	24	34	26	36	0,28	68314B	68314A	68314C	68314D
125	19	33	24	35	27	38	0,29	68315B	68315A	68315C	68315D
130	19	34	25	37	27	39	0,30	68316B	68316A	68316C	68316D
135	20	35	25	38	28	41	0,30	68317B	68317A	68317C	68317D
140	20	36	26	41	28	42	0,31	68318B	68318A	68318C	68318D
145	20	37	26	42	29	45	0,31	68319B	68319A	68319C	68319D
150	20	39	27	43	30	47	0,32	72200B	72200A	72200C	72200D
155	20	40	27	45	30	49	0,33	72201B	72201A	72201C	72201D
160	20	41	27	46	30	50	0,34	72202B	72202A	72202C	72202D
165	21	43	27	47	31	52	0,34	72203B	72203A	72203C	72203D
170	21	45	28	49	31	53	0,35	72204B	72204A	72204C	72204D
175	21	46	28	50	31	53	0,36	72205B	72205A	72205C	72205D
180	22	47	28	51	32	56	0,37	72206B	72206A	72206C	72206D
185	22	48	29	54	32	58	0,37	72207B	72207A	72207C	72207D
190	22	49	29	55	32	59	0,38	72208B	72208A	72208C	72208D
195	22	51	29	57	33	61	0,39	72209B	72209A	72209C	72209D
200	23	52	30	58	33	63	0,40	72210B	72210A	72210C	72210D
205	23	54	30	59	33	64	0,41	72211B	72211A	72211C	72211D
210	23	55	30	61	34	66	0,42	72212B	72212A	72212C	72212D
215	23	57	30	62	34	67	0,42	72213B	72213A	72213C	72213D
220	24	58	31	63	34	69	0,43	72214B	72214A	72214C	72214D
225	24	59	31	66	34	70	0,44	72215B	72215A	72215C	72215D
230	24	60	31	67	35	72	0,45	72216B	72216A	72216C	72216D
235	24	61	32	69	35	73	0,46	72217B	72217A	72217C	72217D
240	24	63	32	70	35	75	0,47	72218B	72218A	72218C	72218D
245	24	64	32	71	36	77	0,48	72219B	72219A	72219C	72219D
250	25	66	32	73	36	78	0,49	72220B	72220A	72220C	72220D
255	25	67	32	74	36	80	0,50	72221B	72221A	72221C	72221D
260	25	69	33	75	36	81	0,51	72222B	72222A	72222C	72222D
265	25	70	33	77	37	84	0,52	72223B	72223A	72223C	72223D
270	25	71	33	80	37	86	0,54	72224B	72224A	72224C	72224D
275	26	72	34	81	38	87	0,55	72225B	72225A	72225C	72225D
280	26	73	34	82	38	89	0,56	72226B	72226A	72226C	72226D
285	26	75	34	84	38	91	0,57	72227B	72227A	72227C	72227D
290	26	77	34	85	38	92	0,58	72228B	72228A	72228C	72228D
295	26	78	34	86	38	94	0,60	72229B	72229A	72229C	72229D
300	27	79	35	88	39	95	0,61	72230B	72230A	72230C	72230D
310	27	82	35	90	39	98	0,62	72231B	72231A	72231C	72231D
320	27	84	36	94	40	101	0,64	72232B	72232A	72232C	72232D
330	28	88	36	97	40	105	0,65	72233B	72233A	72233C	72233D
340	28	90	36	100	40	108	0,66	72234B	72234A	72234C	72234D
350	28	92	37	102	41	111	0,68	72235B	72235A	72235C	72235D
360	28	95	37	106	41	114	0,69	72236B	72236A	72236C	72236D
370	29	98	38	109	42	117	0,71	72237B	72237A	72237C	72237D
380	29	100	38	112	42	120	0,72	72238B	72238A	72238C	72238D
390	29	103	38	114	43	125	0,74	72239B	72239A	72239C	72239D
400	29	106	39	118	43	128	0,75	72240B	72240A	72240C	72240D
410	30	109	39	121	44	131	0,77	72241B	72241A	72241C	72241D
420	30	112	39	124	44	134	0,79	72242B	72242A	72242C	72242D
430	30	114	40	126	44	137	0,80	72243B	72243A	72243C	72243D
440	31	116	40	130	45	140	0,82	72244B	72244A	72244C	72244D
450	31	119	40	133	45	143	0,84	72245B	72245A	72245C	72245D
460	31	122	41	136	45	147	0,86	72246B	72246A	72246C	72246D
470	31	125	41	139	46	150	0,87	72247B	72247A	72247C	72247D
480	32	127	41	141	46	153	0,89	72248B	72248A	72248C	72248D
490	32	130	42	145	46	156	0,91	72249B	72249A	72249C	72249D
500	32	133	42	148	47	159	0,93	72250B	72250A	72250C	72250D

Ball pitch Ø KK [mm]	Load rating						Weight [kg]	Order number			
	A,B		C		D			Version			
	C	Co	C	Co	C	Co		B	A	C	D
510	32	136	42	151	47	164	0,95	72251B	72251A	72251C	72251D
520	33	138	43	153	48	167	0,97	72252B	72252A	72252C	72252D
530	33	140	43	157	48	170	0,99	72253B	72253A	72253C	72253D
540	33	144	43	160	48	173	1,01	72254B	72254A	72254C	72254D
550	33	146	43	163	49	176	1,04	72255B	72255A	72255C	72255D
560	33	149	44	165	49	179	1,06	72256B	72256A	72256C	72256D
570	34	151	44	169	49	182	1,08	72257B	72257A	72257C	72257D
580	34	155	44	172	49	185	1,10	72258B	72258A	72258C	72258D
590	34	157	45	175	50	189	1,13	72259B	72259A	72259C	72259D
600	34	159	45	177	50	192	1,15	72260B	72260A	72260C	72260D
610	34	162	45	180	50	195	1,18	72261B	72261A	72261C	72261D
620	35	165	45	184	51	199	1,20	72262B	72262A	72262C	72262D
630	35	168	46	187	51	201	1,23	72263B	72263A	72263C	72263D
640	35	170	46	189	51	206	1,25	72264B	72264A	72264C	72264D
650	35	173	46	192	52	209	1,28	72265B	72265A	72265C	72265D
660	36	176	47	196	52	212	1,31	72266B	72266A	72266C	72266D
670	36	179	47	199	52	215	1,34	72267B	72267A	72267C	72267D
680	36	181	47	202	53	218	1,37	72268B	72268A	72268C	72268D
690	36	183	47	204	53	221	1,40	72269B	72269A	72269C	72269D
700	36	187	48	208	53	224	1,43	72270B	72270A	72270C	72270D
710	36	189	48	211	53	228	1,46	72271B	72271A	72271C	72271D
720	37	192	48	214	54	231	1,49	72272B	72272A	72272C	72272D
730	37	194	48	216	54	234	1,52	72273B	72273A	72273C	72273D
740	37	198	48	219	54	237	1,55	72274B	72274A	72274C	72274D
750	37	200	49	223	55	242	1,59	72275B	72275A	72275C	72275D
760	37	203	49	226	55	245	1,62	72276B	72276A	72276C	72276D
770	38	205	49	228	55	248	1,65	72277B	72277A	72277C	72277D
780	38	209	49	231	55	251	1,69	72278B	72278A	72278C	72278D
790	38	211	50	235	56	254	1,73	72279B	72279A	72279C	72279D
800	38	213	50	238	56	257	1,76	72280B	72280A	72280C	72280D
810	38	216	50	240	56	260	1,80	72281B	72281A	72281C	72281D
820	39	219	50	243	56	263	1,84	72282B	72282A	72282C	72282D
830	39	222	51	246	57	266	1,88	72283B	72283A	72283C	72283D
840	39	224	51	250	57	270	1,92	72284B	72284A	72284C	72284D
850	39	226	51	253	57	273	1,96	72285B	72285A	72285C	72285D
860	39	229	51	255	57	276	2,00	72286B	72286A	72286C	72286D
870	39	232	51	258	58	280	2,05	72287B	72287A	72287C	72287D
880	40	235	52	262	58	284	2,09	72288B	72288A	72288C	72288D
890	40	237	52	265	58	287	2,14	72289B	72289A	72289C	72289D
900	40	240	52	267	58	290	2,18	72290B	72290A	72290C	72290D
920	40	246	53	274	59	296	2,23	72291B	72291A	72291C	72291D
940	40	250	53	279	59	302	2,28	72292B	72292A	72292C	72292D
960	41	256	54	286	60	308	2,33	72293B	72293A	72293C	72293D
980	41	261	54	291	60	315	2,38	72294B	72294A	72294C	72294D
1000	41	267</									



## Series LDD

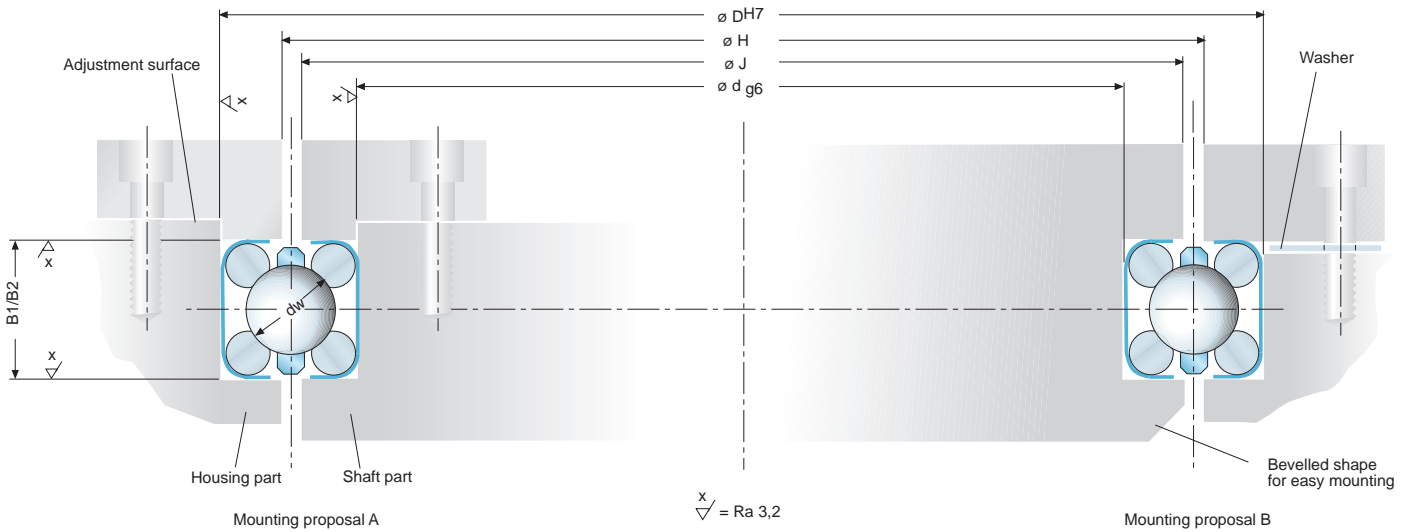

Cross section	Diameter D	Nominal dim. B	Ball Ø d <sub>w</sub>	Mounting dim. class PL1 B1	Starting torque	Mounting dim. class PL2 B2	Starting torque
3/8"	139 - 654	9,525	6	9,57 - 0,02	3 + 2,0	9,53 - 0,02	5 + 2,5
1/2"	177 - 660	12,700	8	12,76 - 0,03	4 + 2,5	12,72 - 0,03	6 + 3,0
3/4"	215 - 673	19,050	15	19,12 - 0,03	5 + 2,5	19,07 - 0,03	7 + 3,0
1"	254 - 685	25,400	20	25,48 - 0,03	6 + 2,5	25,42 - 0,03	8 + 3,0

Dimensions [mm], Moments [Nm]

### Consists of:

- Two metal sleeves that hold the bearing
- Four ball race rings with ground raceways
- Segmented strip cage with retained balls

### Features:

- Direct integration into your mating structure
  - Easy mounting of the machine structure
  - Smallest mounting space and high precision
  - Calculation programm to find the best suitable bearing
- Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

### Sleeves:

- ready-to-mount bearing elements with inner and outer sleeve

### Rolling elements:

- Steel balls DIN5401, class III

### Strip cage:

- Ball guided polyamide ball cage divided into segments
- The segmented strip cage runs very smooth and silent and equalizes length differences caused by high temperatures. The number of segments refers to the ball pitch diameter. For special applications and temperatures higher than 120°C we recommend ball cages made of non-corrosive steel or brass.

### Lubrication:

- with ball bearing grease. For more information see page 27.

### Temperature:

- Continuous operation: -10°C to +70°C, short time operation max. 120° C
- Other temperatures on request


### Adjustment:

- By plane surface
- By washers (see page 25)


The preload is adjusted correct when the rotational resistance without seal corresponds to table 1 (temperature range -40° C to +100° C).

### Circumferential speed:

- with grease lubrication max. 10 m/s
- with oil lubrication max. 12 m/s

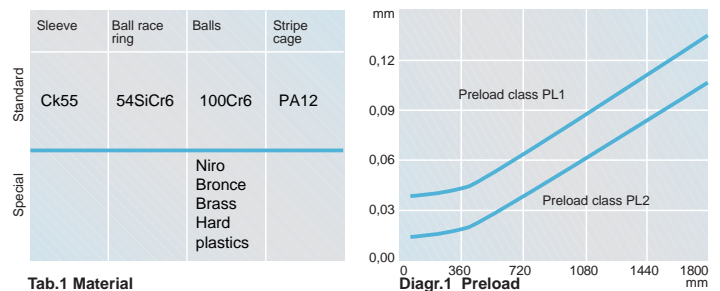


Tab.1 Material

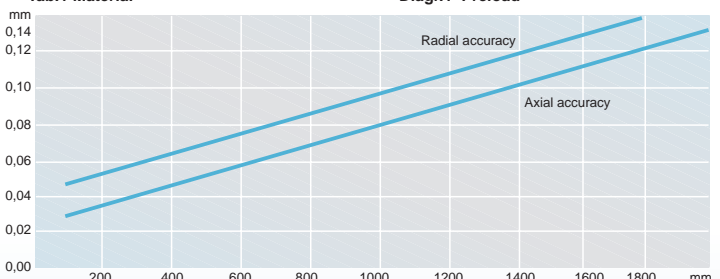


Diagr.2 Radial and axial accuracy




	Dimensiones						Load rating		Weight	Order number
	d [inch]	D [inch]	d [mm]	D [mm]	H (min.) [mm]	J (max.) [mm]	dyn. C [KN]	stat. C <sub>0</sub> [KN]	ca. [kg]	
<b>Cross section 3/8"</b>	4,75	5,50	120,65	139,70	132	128	15	24	0,15	75067A
	5	5,75	127,00	146,05	139	134	16	25	0,16	75068A
	5,5	6,25	139,70	158,75	151	147	16	28	0,18	75069A
	6	6,75	152,40	171,45	164	159	17	30	0,19	75070A
	6,5	7,25	165,10	184,15	177	172	17	33	0,21	75071A
	7	7,75	177,80	196,85	189	185	18	35	0,22	75072A
	7,5	8,25	190,50	209,55	202	197	18	37	0,24	75073A
	8	8,75	203,20	222,25	215	210	19	40	0,25	75074A
	9	9,75	228,60	247,65	240	236	20	45	0,29	75075A
	10	10,75	254,00	273,05	266	261	20	50	0,32	75076A
	11	11,75	279,40	298,45	291	286	21	54	0,35	75077A
	12	12,75	304,80	323,85	316	312	22	59	0,38	75078A
	14	14,75	355,60	374,65	367	363	23	69	0,44	75079A
	16	16,75	406,40	425,45	418	413	24	78	0,50	75080A
	18	18,75	457,20	476,25	469	464	25	88	0,56	75081A
	20	20,75	508,00	527,05	520	515	26	98	0,63	75082A
	25	25,75	635,00	654,05	647	642	28	122	0,78	75083A
<b>Cross section 1/2"</b>	6	7,00	152,40	177,80	168	162	27	33	0,34	75010A
	6,5	7,50	165,10	190,50	181	174	28	35	0,36	75011A
	7	8,00	177,80	203,20	193	187	29	37	0,39	75012A
	7,5	8,50	190,50	215,90	206	200	30	41	0,42	75013A
	8	9,00	203,20	228,60	219	213	30	43	0,45	75014A
	9	10,00	228,60	254,00	244	238	31	48	0,50	75015A
	10	11,00	254,00	279,40	270	263	32	53	0,56	75016A
	11	12,00	279,40	304,80	295	289	34	58	0,61	75017A
	12	13,00	304,80	330,20	320	314	35	64	0,66	75018A
	14	15,00	355,60	381,00	371	365	37	74	0,77	75019A
	16	17,00	406,40	431,80	422	416	39	84	0,88	75020A
	18	19,00	457,20	482,60	473	467	40	95	0,99	75021A
	20	21,00	508,00	533,40	524	517	42	105	1,09	75022A
	25	26,00	635,00	660,40	651	644	45	131	1,36	75023A
<b>Cross section 3/4"</b>	7	8,50	177,80	215,90	201	192	73	73	0,89	75032A
	7,5	9,00	190,50	228,60	214	205	75	78	0,95	75033A
	8	9,50	203,20	241,30	227	217	77	82	1,01	75034A
	9	10,50	228,60	266,70	252	243	80	92	1,13	75035A
	10	11,50	254,00	292,10	278	268	84	103	1,26	75036A
	11	12,50	279,40	317,50	303	293	87	112	1,38	75037A
	12	13,50	304,80	342,90	328	319	89	121	1,49	75038A
	14	15,50	355,60	393,70	379	370	95	142	1,74	75039A
	16	17,50	406,40	444,50	430	420	100	160	1,97	75040A
	18	19,50	457,20	495,30	481	471	103	180	2,22	75041A
	20	21,50	508,00	546,10	532	522	108	201	2,47	75042A
	25	26,50	635,00	673,10	659	649	116	249	3,07	75043A
<b>Cross section 1"</b>	8	10,00	203,20	254,00	235	222	118	127	1,81	75054A
	9	11,00	228,60	279,40	260	247	124	141	2,01	75055A
	10	12,00	254,00	304,80	286	273	128	156	2,26	75056A
	11	13,00	279,40	330,20	311	298	133	170	2,47	75057A
	12	14,00	304,80	355,60	336	324	137	184	2,67	75058A
	14	16,00	355,60	406,40	387	374	146	218	3,09	75059A
	16	18,00	406,40	457,20	438	425	154	247	3,54	75060A
	18	20,00	457,20	508,00	489	476	160	276	3,96	75061A
	20	22,00	508,00	558,80	540	527	166	305	4,41	75062A
	25	27,00	635,00	685,80	667	654	179	378	5,45	75063A




## Series LDL

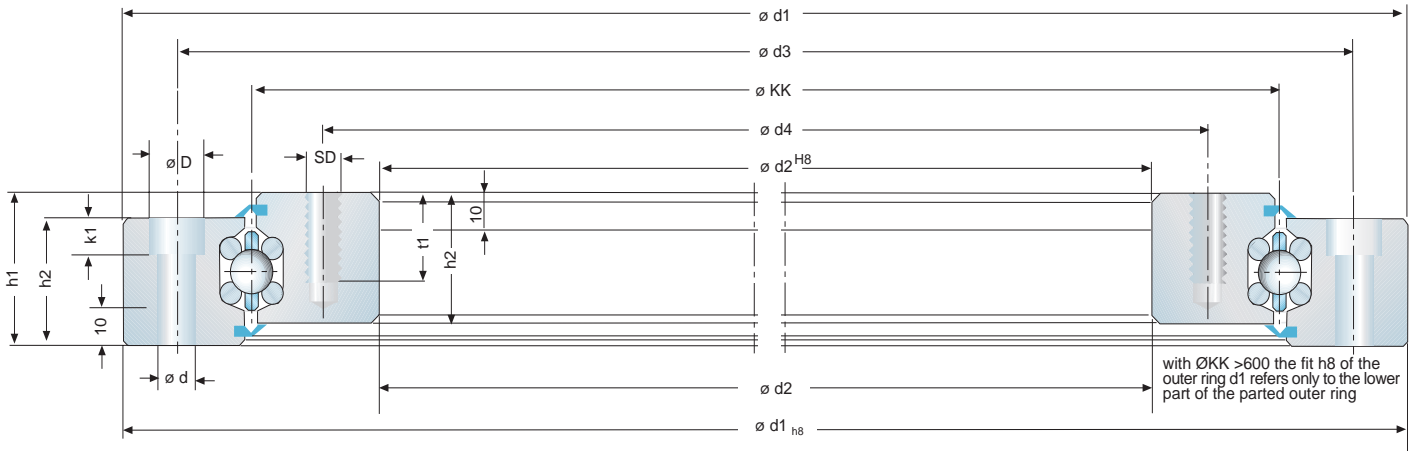

Bore shape: Ø KK 100 - 600 mm

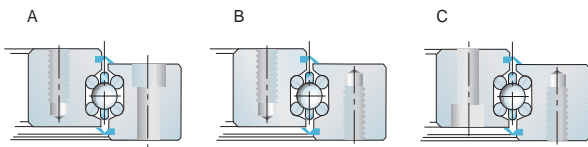

Bore shape: Ø KK > 600 mm

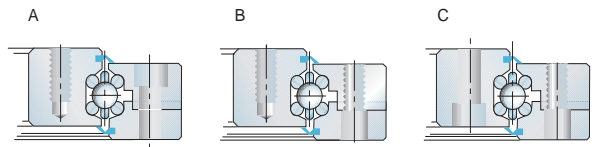

### Consists of:

- Inner and outer ring of steel
- Bearing element with ground raceways
- Seal on both sides of the bearing
- optional with inner or outer gear

### Features:

- ready-to-mount bearing assembly
- free selection of material and coating
- free selection of bearing geometrie
- free selection of bore shape
- free selection of gear from 60 to 1600mm
- highest radial and axial accuracy with max. stiffness
- specified rotational resistance ex works
- rotational resistance adjustable from clearance to preload
- calculation programm to find the best suitable bearing

Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

### Lubrication:

- with ball bearing grease. For more information see page 27.

### Temperature:

- Standard: Continuous operation: -30°C to +80°C, short time operation max. 100°C
  - Optional: Continous operation -30°C to +180°C
- Please consult us

### Adjustment:

- Preload ex works (see diagram 1)

### Circumferential speed:


- with seal max. 10 m/s
- without seal max. 12 m/s

### Gear:

- Standard see page 23
  - optional: tooth belt gear, worm gear, angular gear, etc.
- Please consult us



	Inner outer ring	Race ways	Antifriction bearing	Strip cages	Seal
Standard	C45N	54SiCr6	100Cr6	PA12	NBR
Teeth:42CrMo4V					
Special	Alu AlZnMgCu05 Brass CuSn12 Niro X5CrNi18.10 Plastic Magnesium	Niro X12CrNi177 X7CrNi177 Duratherm 600F1450 Corrotec, ATC coating	Niro X45Cr13 Oxydkeramik POM	Niro Bronce Hard plastics Brass	Viton Teflon Labyrinth Wave seal Metal seal

Tab.1 Material

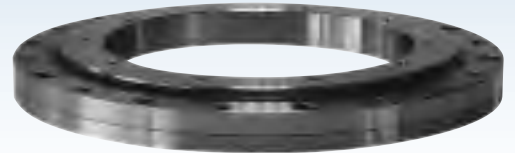

Antifriction wire race bearings

Diameter		Height		Fastening							Number	Load rating		Weight	Order number			
KK	d1 [mm]	d2 [mm]	h1 [mm]	h2 [mm]	d3 [mm]	d4 [mm]	D [mm]	d [mm]	k1 [mm]	SD [mm]	t1 [mm]	a [Stück]	C [kN]	Co [kN]	[kg]	Bore shape		
																A	B	C
100	150	50	30	24	135	65	11	6,6	6,8	M6	15	6x	17	25	2,5	66401Y	66402Y	66403Y
150	200	100	30	24	185	115	11	6,6	6,8	M6	15	6x	18	40	3,7	73000Y	73001Y	73002Y
160	210	110	30	24	195	125	11	6,6	6,8	M6	15	6x	18	43	4,0	73003Y	73004Y	73005Y
170	220	120	30	24	205	135	11	6,6	6,8	M6	15	6x	19	46	4,2	73006Y	73007Y	73008Y
180	230	130	30	24	215	145	11	6,6	6,8	M6	15	8x	19	49	4,5	73009Y	73010Y	73011Y
190	240	140	30	24	225	155	11	6,6	6,8	M6	15	8x	20	51	4,7	73012Y	73013Y	73014Y
200	250	150	30	24	235	165	11	6,6	6,8	M6	15	8x	20	54	5,0	73015Y	73016Y	73017Y
210	260	160	30	24	245	175	11	6,6	6,8	M6	15	8x	21	57	5,2	73018Y	73019Y	73020Y
220	270	170	30	24	255	185	11	6,6	6,8	M6	15	8x	21	60	5,5	73021Y	73022Y	73023Y
230	290	170	34	27	270	190	15	9,0	9,0	M8	20	8x	24	64	7,7	73024Y	73025Y	73026Y
240	300	180	34	27	280	200	15	9,0	9,0	M8	20	8x	24	67	8,1	73027Y	73028Y	73029Y
250	310	190	34	27	290	210	15	9,0	9,0	M8	20	10x	25	70	8,4	73030Y	73031Y	73032Y
260	320	200	34	27	300	220	15	9,0	9,0	M8	20	10x	25	73	8,8	73033Y	73034Y	73035Y
270	330	210	34	27	310	230	15	9,0	9,0	M8	20	10x	25	76	9,1	73036Y	73037Y	73038Y
280	340	220	34	27	320	240	15	9,0	9,0	M8	20	10x	26	78	9,4	73039Y	73040Y	73041Y
290	350	230	34	27	330	250	15	9,0	9,0	M8	20	10x	26	82	9,8	73042Y	73043Y	73044Y
300	360	240	38	31	340	260	15	9,0	9,0	M8	20	12x	27	84	11,6	73045Y	73046Y	73047Y
310	370	250	38	31	350	270	15	9,0	9,0	M8	20	12x	27	87	12,0	73048Y	73049Y	73050Y
320	380	260	38	31	360	280	15	9,0	9,0	M8	20	12x	27	90	12,4	73051Y	73052Y	73053Y
330	390	270	38	31	370	290	15	9,0	9,0	M8	20	14x	28	93	12,8	73054Y	73055Y	73056Y
340	400	280	38	31	380	300	15	9,0	9,0	M8	20	14x	28	96	13,2	73057Y	73058Y	73059Y
350	410	290	38	31	390	310	15	9,0	9,0	M8	20	14x	28	98	13,5	73060Y	73061Y	73062Y
360	420	300	38	31	400	320	15	9,0	9,0	M8	20	14x	28	101	13,9	73063Y	73064Y	73065Y
370	430	310	38	31	410	330	15	9,0	9,0	M8	20	14x	29	105	14,3	73066Y	73067Y	73068Y
380	440	320	38	31	420	340	15	9,0	9,0	M8	20	14x	29	107	14,7	73069Y	73070Y	73071Y
390	450	330	38	31	430	350	15	9,0	9,0	M8	20	14x	29	110	15,1	73072Y	73073Y	73074Y
400	470	330	44	37	445	355	18	11,0	11,0	M10	25	14x	28	128	21,6	73075Y	73076Y	73077Y
410	480	340	44	37	455	365	18	11,0	11,0	M10	25	14x	28	133	22,1	73078Y	73079Y	73080Y
420	490	350	44	37	465	375	18	11,0	11,0	M10	25	14x	28	136	22,7	73081Y	73082Y	73083Y
430	500	360	44	37	475	385	18	11,0	11,0	M10	25	14x	29	139	23,2	73084Y	73085Y	73086Y
440	510	370	44	37	485	395	18	11,0	11,0	M10	25	14x	29	142	23,7	73087Y	73088Y	73089Y
450	520	380	44	37	495	405	18	11,0	11,0	M10	25	14x	29	144	24,3	73090Y	73091Y	73092Y
460	530	390	44	37	505	415	18	11,0	11,0	M10	25	14x	29	149	24,8	73093Y	73094Y	73095Y
470	540	400	44	37	515	425	18	11,0	11,0	M10	25	14x	29	152	25,4	73096Y	73097Y	73098Y
480	550	410	44	37	525	435	18	11,0	11,0	M10	25	14x	30	155	25,9	73099Y	73100Y	73101Y
490	560	420	44	37	535	445	18	11,0	11,0	M10	25	14x	30	158	26,4	73102Y	73103Y	73104Y
500	580	420	49	42	550	450	20	14,0	13,0	M12	30	14x	30	162	35,0	73105Y	73106Y	73107Y
510	590	430	49	42	560	460	20	14,0	13,0	M12	30	14x	30	165	35,7	73108Y	73109Y	73110Y
520	600	440	49	42	570	470	20	14,0	13,0	M12	30	14x	31	168	36,4	73111Y	73112Y	73113Y
530	610	450	49	42	580	480	20	14,0	13,0	M12	30	16x	31	171	37,1	73114Y	73115Y	73116Y
540	620	460	49	42	590	490	20	14,0	13,0	M12	30	16x	31	175	37,8	73117Y	73118Y	73119Y
550	630	470	49	42	600	500	20	14,0	13,0	M12	30	16x	31	178	38,5	73120Y	73121Y	73122Y
560	640	480	49	42	610	510	20	14,0	13,0	M12	30	16x	31	181	39,2	73123Y	73124Y	73125Y
570	650	490	49	42	620	520	20	14,0	13,0	M12	30	16x	32	184	39,9	73126Y	73127Y	73128Y
580	660	500	49	42	630	530	20	14,0	13,0	M12	30	16x	32	188	40,6	73129Y	73130Y	73131Y
590	670	510	49	42	640	540	20	14,0	13,0	M12	30	16x	32	191	41,3	73132Y	73133Y	73134Y
600	680	520	49	42	650	550	20	14,0	13,0	M12	30	16x	32	194	42,0	73135Y	73136Y	73137Y
620	710	530	53	45	670	570	20	14,0	13,0	M12	30	22x	75	330	56,9	66141A	66142A	66143A
640	730	550	53	45	690	590	20	14,0	13,0	M12	30	22x	76	341	58,8	66144A	66145A	66146A
660	750	570	53	45	710	610	20	14,0	13,0	M12	30	22x	77	351	60,7	66147A	66148A	66149A
680	770	590	53	45	730	630	20	14,0	13,0	M12	30	22x	78	361	62,5	66150A	66151A	66152A
700	790	610	53	45	750	650	20	14,0	13,0	M12	30	22x	79	371	64,4	66153A	66154A	66155A
720	810	630	53	45	770	670	20	14,0	13,0	M12	30	22x	80	385	66,3	66156A	66157A	66158A
740	830	650	53	45	790	690	20	14,0	13,0	M12	30	24x	81	396	68,0	66159A	66160A	66161A
760	850	670	53	45	810	710	20	14,0	13,0	M12	30	24x	81	406	69,9	66162A	66163A	66164A
780	870	690	53	45	830	730	20	14,0	13,0	M12	30	24x	82	416	71,8	66165A	66167A	66168A
800	900	700	60	52	865	735	26	18,0	17,5	M16	35	24x	104	497	93,9	66168A	66169A	66170A
820	920	720	60	52	885	755	26	18,0	17,5	M16	35	24x	106	513	96,3	66171A	66172A	66173A
840	940	740	60	52	905	775	26	18,0	17,5	M16	35	24x	106	523	98,7	66174A	66175A	66176A
860	960	760	60	52	925	795	26	18,0	17,5	M16	35	24x	107	534	101,1	66177A	66178A	66179A
880	980	780	60	52	945	815	26	18,0	17,5	M16	35	24x	108	549	103,5	66180A	66181A	66182A
900	1000	800	60	52	965	835	26	18,0	17,5	M16	35	24x	109	560	105,9	66183A	66184A	66185A
920	1020	820	60	52	985	855	26	18,0	17,5	M16	35	24x	110	575	108,4	66186A	66187A	66188A
940	1040	840	60	52	1005	875	26	18,0	17,5	M16	35	24x	111	586	110,8	66189A	66190A	66191A
960	1060	860	60	52	1025	895	26	18,0	17,5	M16	35	26x	112	596	113,0	66192A	66193A	66194A
980	1080	880	60	52	1045	915	26	18,0	17,5	M16	35	26x	113	612	115,4	66195A	66196A	66197A
1000	1100	900	60	52	1065	935	26	18,0	17,5	M16	35	26x	113	623	117,8	66198A	66199A	66200A
1100	1200	1000	60	52	1165	1035	26	18,0	17,5	M16	35	30x	115	664	129,6	66386A	66387A	66388A
1200	1300	1100	60	52	1265	1135	26	18,0	17,5	M16	35	30x	121	747	141,6	66389A	66390A	66391A
1300	1400	1200	60	52	1365	1235	26	18,0	17,5	M16	35	36x	124	799	153,1	66392A	66393A	66394A
1400	1500	1300	60	52	1465	1335	26	18,0	17,5	M16	35	36x	128	872	165,1	66395A	66396A	66397A
1500	1600	1400	60	52	1565	1435	26	18,0	17,5	M16	35	40x	129	914	177,7	66398A	66399A	66400A

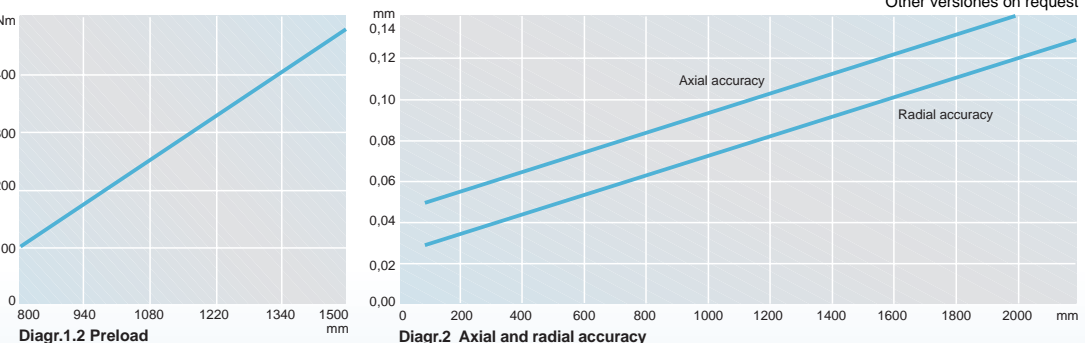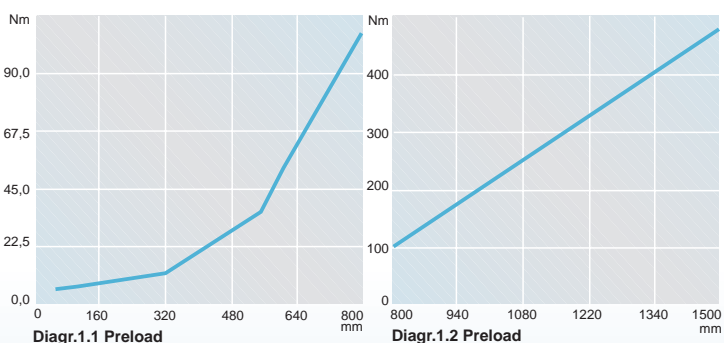




# Bearing assemblies

## Series LDL Aluminium version




Diameter		Height		Fastening							Number	Load rating		Weight	Order number			
KK	d1 [mm]	d2 [mm]	h1 [mm]	h2 [mm]	d3 [mm]	d4 [mm]	D [mm]	d [mm]	k1 [mm]	SD [mm]	t1 [mm]	a [Stück]	C [kN]	Co [kN]	[kg]	Bore shape		
																A	B	C
100	150	50	30	24	135	65	11	6,6	6,8	M6	15	6x	17	25	1,00	66401L	66402L	66403L
150	200	100	30	24	185	115	11	6,6	6,8	M6	15	6x	18	40	1,48	73000L	73001L	73002L
160	210	110	30	24	195	125	11	6,6	6,8	M6	15	6x	18	43	1,60	73003L	73004L	73005L
170	220	120	30	24	205	135	11	6,6	6,8	M6	15	6x	19	46	1,68	73006L	73007L	73008L
180	230	130	30	24	215	145	11	6,6	6,8	M6	15	8x	19	49	1,80	73009L	73010L	73011L
190	240	140	30	24	225	155	11	6,6	6,8	M6	15	8x	20	51	1,88	73012L	73013L	73014L
200	250	150	30	24	235	165	11	6,6	6,8	M6	15	8x	20	54	2,00	73015L	73016L	73017L
210	260	160	30	24	245	175	11	6,6	6,8	M6	15	8x	21	57	2,08	73018L	73019L	73020L
220	270	170	30	24	255	185	11	6,6	6,8	M6	15	8x	21	60	2,20	73021L	73022L	73023L
230	290	170	34	27	270	190	15	9,0	9,0	M8	20	8x	24	64	2,96	73024L	73025L	73026L
240	300	180	34	27	280	200	15	9,0	9,0	M8	20	8x	24	67	3,12	73027L	73028L	73029L
250	310	190	34	27	290	210	15	9,0	9,0	M8	20	10x	25	70	3,23	73030L	73031L	73032L
260	320	200	34	27	300	220	15	9,0	9,0	M8	20	10x	25	73	3,38	73033L	73034L	73035L
270	330	210	34	27	310	230	15	9,0	9,0	M8	20	10x	25	76	3,50	73036L	73037L	73038L
280	340	220	34	27	320	240	15	9,0	9,0	M8	20	10x	26	78	3,62	73039L	73040L	73041L
290	350	230	34	27	330	250	15	9,0	9,0	M8	20	10x	26	82	3,77	73042L	73043L	73044L
300	360	240	38	31	340	260	15	9,0	9,0	M8	20	12x	27	84	4,46	73045L	73046L	73047L
310	370	250	38	31	350	270	15	9,0	9,0	M8	20	12x	27	87	4,62	73048L	73049L	73050L
320	380	260	38	31	360	280	15	9,0	9,0	M8	20	12x	27	90	4,77	73051L	73052L	73053L
330	390	270	38	31	370	290	15	9,0	9,0	M8	20	14x	28	93	4,92	73054L	73055L	73056L
340	400	280	38	31	380	300	15	9,0	9,0	M8	20	14x	28	96	5,08	73057L	73058L	73059L
350	410	290	38	31	390	310	15	9,0	9,0	M8	20	14x	28	98	5,19	73060L	73061L	73062L
360	420	300	38	31	400	320	15	9,0	9,0	M8	20	14x	28	101	5,35	73063L	73064L	73065L
370	430	310	38	31	410	330	15	9,0	9,0	M8	20	14x	29	105	5,50	73066L	73067L	73068L
380	440	320	38	31	420	340	15	9,0	9,0	M8	20	14x	29	107	5,65	73069L	73070L	73071L
390	450	330	38	31	430	350	15	9,0	9,0	M8	20	14x	29	110	5,81	73072L	73073L	73074L
400	470	330	44	37	445	355	18	11,0	11,0	M10	25	14x	28	128	8,00	73075L	73076L	73077L
410	480	340	44	37	455	365	18	11,0	11,0	M10	25	14x	28	133	8,19	73078L	73079L	73080L
420	490	350	44	37	465	375	18	11,0	11,0	M10	25	14x	28	136	8,41	73081L	73082L	73083L
430	500	360	44	37	475	385	18	11,0	11,0	M10	25	14x	29	139	8,59	73084L	73085L	73086L
440	510	370	44	37	485	395	18	11,0	11,0	M10	25	14x	29	142	8,78	73087L	73088L	73089L
450	520	380	44	37	495	405	18	11,0	11,0	M10	25	14x	29	144	9,00	73090L	73091L	73092L
460	530	390	44	37	505	415	18	11,0	11,0	M10	25	14x	29	149	9,19	73093L	73094L	73095L
470	540	400	44	37	515	425	18	11,0	11,0	M10	25	14x	29	152	9,41	73096L	73097L	73098L
480	550	410	44	37	525	435	18	11,0	11,0	M10	25	14x	30	155	9,59	73099L	73100L	73101L
490	560	420	44	37	535	445	18	11,0	11,0	M10	25	14x	30	158	9,78	73102L	73103L	73104L
500	580	420	49	42	550	450	20	14,0	13,0	M12	30	14x	30	162	12,96	73105L	73106L	73107L
510	590	430	49	42	560	460	20	14,0	13,0	M12	30	14x	30	165	13,22	73108L	73109L	73110L
520	600	440	49	42	570	470	20	14,0	13,0	M12	30	14x	31	168	13,48	73111L	73112L	73113L
530	610	450	49	42	580	480	20	14,0	13,0	M12	30	16x	31	171	13,74	73114L	73115L	73116L
540	620	460	49	42	590	490	20	14,0	13,0	M12	30	16x	31	175	14,00	73117L	73118L	73119L
550	630	470	49	42	600	500	20	14,0	13,0	M12	30	16x	31	178	14,26	73120L	73121L	73122L
560	640	480	49	42	610	510	20	14,0	13,0	M12	30	16x	31	181	14,52	73123L	73124L	73125L
570	650	490	49	42	620	520	20	14,0	13,0	M12	30	16x	32	184	14,78	73126L	73127L	73128L
580	660	500	49	42	630	530	20	14,0	13,0	M12	30	16x	32	188	15,04	73129L	73130L	73131L
590	670	510	49	42	640	540	20	14,0	13,0	M12	30	16x	32	191	15,30	73132L	73133L	73134L
600	680	520	49	42	650	550	20	14,0	13,0	M12	30	16x	32	194	15,56	73135L	73136L	73137L
620	710	530	53	45	670	570	20	14,0	13,0	M12	30	22x	75	330	21,07	66141L	66142L	66143L
640	730	550	53	45	690	590	20	14,0	13,0	M12	30	22x	76	341	21,78	66144L	66145L	66146L
660	750	570	53	45	710	610	20	14,0	13,0	M12	30	22x	77	351	22,48	66147L	66148L	66149L
680	770	590	53	45	730	630	20	14,0	13,0	M12	30	22x	78	361	23,15	66150L	66151L	66152L
700	790	610	53	45	750	650	20	14,0	13,0	M12	30	22x	79	371	23,85	66153L	66154L	66155L
720	810	630	53	45	770	670	20	14,0	13,0	M12	30	22x	80	385	24,56	66156L	66157L	66158L
740	830	650	53	45	790	690	20	14,0	13,0	M12	30	24x	81	396	25,19	66159L	66160L	66161L
760	850	670	53	45	810	710	20	14,0	13,0	M12	30	24x	81	406	25,89	66162L	66163L	66164L
780	870	690	53	45	830	730	20	14,0	13,0	M12	30	24x	82	416	26,59	66165L	66166L	66167L
800	900	700	60	52	865	735	26	18,0	17,5	M16	35	24x	104	497	36,12	66168L	66169L	66170L
820	920	720	60	52	885	755	26	18,0	17,5	M16	35	24x	106	513	37,04	66171L	66172L	66173L
840	940	740	60	52	905	775	26	18,0	17,5	M16	35	24x	106	523	37,96	66174L	66175L	66176L
860	960	760	60	52	925	795	26	18,0	17,5	M16	35	24x	107	534	38,88	66177L	66178L	66179L
880	980	780	60	52	945	815	26	18,0	17,5	M16	35	24x	108	549	39,81	66180L	66181L	66182L
900	1000	800	60	52	965	835	26	18,0	17,5	M16	35	24x	109	560	40,73	66183L	66184L	66185L
920	1020	820	60	52	985	855	26	18,0	17,5	M16	35	24x	110	575	41,69	66186L	66187L	66188L
940	1040	840	60	52	1005	875	26	18,0	17,5	M16	35	24x	111	586	42,62	66189L	66190L	66191L
960	1060	860	60	52	1025	895	26	18,0	17,5	M16	35	26x	112	596	43,46	66192L	66193L	66194L
980	1080	880	60	52	1045	915	26	18,0	17,5	M16	35	26x	113	612	44,38	66195L	66196L	66197L
1000	1100	900	60	52	1065	935	26	18,0	17,5	M16	35	26x	113	623	45,31	66198L	66199L	66200L
1100	1200	1000	60	52	1165	1035	26	18,0	17,5	M16	35	30x	115	664	49,85	66386L	66387L	66388L
1200	1300	1100	60	52	1265	1135	26	18,0	17,5	M16	35	30x	121	747	54,46	66389L	66390L	66391L
1300	1400	1200	60	52	1365	1235	26	18,0	17,5	M16	35	36x	124	799	58,88	66392L	66393L	66394L
1400	1500	1300	60	52	1465	1335	26	18,0	17,5	M16	35	36x	128	872	63,50	66395L	66396L	66397L
1500	1600	1400	60	52	1565	1435	26	18,0	17,5	M16	35	40x	129	914	68,35	66398L	66399L	66400L

Other version on request

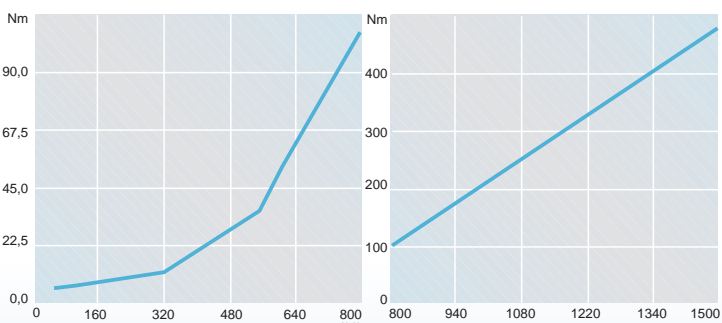

# Bearing assemblies


## Series LDL with gear

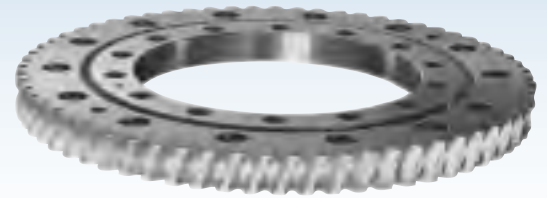


KK	Wide Ø	Modul m	Teilkreis d02	Teeth number Z	Ø	Order number		
						Bore shape		
	b		d02		d2	A	B	C
100	19	2	40	20	50	66401W	66402W	66403W
150	19	2	90	45	100	73000W	73001W	73002W
160	19	2	100	50	110	73003W	73004W	73005W
170	19	2	110	55	120	73006W	73007W	73008W
180	19	2	120	60	130	73009W	73010W	73011W
190	19	2	130	65	140	73012W	73013W	73014W
200	19	2	140	70	150	73015W	73016W	73017W
210	19	2	150	75	160	73018W	73019W	73020W
220	19	2	160	80	170	73021W	73022W	73023W
230	22	2	160	80	170	73024W	73025W	73026W
240	22	2	170	85	180	73027W	73028W	73029W
250	22	2	180	90	190	73030W	73031W	73032W
260	22	2	190	95	200	73033W	73034W	73035W
270	22	2	200	100	210	73036W	73037W	73038W
280	22	2	210	105	220	73039W	73040W	73041W
290	22	2	220	110	230	73042W	73043W	73044W
300	26	3	228	76	240	73045W	73046W	73047W
310	26	3	237	79	250	73048W	73049W	73050W
320	26	3	249	83	260	73051W	73052W	73053W
330	26	3	258	86	270	73054W	73055W	73056W
340	26	3	264	88	280	73057W	73058W	73059W
350	26	3	276	92	290	73060W	73061W	73062W
360	26	3	288	96	300	73063W	73064W	73065W
370	26	3	297	99	310	73066W	73067W	73068W
380	26	3	306	102	320	73069W	73070W	73071W
390	26	3	318	106	330	73072W	73073W	73074W
400	32	3	318	106	330	73075W	73076W	73077W
410	32	3	324	108	340	73078W	73079W	73080W
420	32	3	336	112	350	73081W	73082W	73083W
430	32	3	348	116	360	73084W	73085W	73086W
440	32	3	357	119	370	73087W	73088W	73089W
450	32	3	366	122	380	73090W	73091W	73092W
460	32	3	378	126	390	73093W	73094W	73095W
470	32	3	387	129	400	73096W	73097W	73098W
480	32	3	396	123	410	73099W	73100W	73101W
490	32	3	408	136	420	73102W	73103W	73104W
500	35	3	408	136	420	73105W	73106W	73107W
510	35	3	414	138	430	73108W	73109W	73110W
520	35	3	426	142	440	73111W	73112W	73113W
530	35	3	438	146	450	73114W	73115W	73116W
540	35	3	444	148	460	73117W	73118W	73119W
550	35	3	456	152	470	73120W	73121W	73122W
560	35	3	468	156	480	73123W	73124W	73125W
570	35	3	477	159	490	73126W	73127W	73128W
580	35	3	486	162	500	73129W	73130W	73131W
590	35	3	498	166	510	73132W	73133W	73134W
600	35	3	507	169	520	73135W	73136W	73137W
620	38	4	512	128	530	66141W	66142W	66143W
640	38	4	532	133	550	66144W	66145W	66146W
660	38	4	552	138	570	66147W	66148W	66149W
680	38	4	572	143	590	66150W	66151W	66152W
700	38	4	592	148	610	66153W	66154W	66155W
720	38	4	612	153	630	66156W	66157W	66158W
740	38	4	632	158	650	66159W	66160W	66161W
760	38	4	648	162	670	66162W	66163W	66164W
780	38	4	672	168	690	66156W	66157W	66158W
800	45	5	680	136	700	66168W	66169W	66170W
820	45	5	700	140	720	66171W	66172W	66173W
840	45	5	720	144	740	66174W	66175W	66176W
860	45	5	740	148	760	66177W	66178W	66179W
880	45	5	760	152	780	66180W	66181W	66182W
900	45	5	780	156	800	66183W	66184W	66185W
920	45	5	800	160	820	66186W	66187W	66188W
940	45	5	820	164	840	66189W	66190W	66191W
960	45	5	840	168	860	66192W	66193W	66194W
980	45	5	860	172	880	66195W	66196W	66197W
1000	45	5	880	176	900	66198W	66199W	66200W
1100	45	5	980	196	1000	66386W	66387W	66388W
1200	45	5	1080	216	1100	66389W	66390W	66391W
1300	45	5	1180	236	1200	66392W	66393W	66394W
1400	45	5	1280	256	1300	66395W	66396W	66397W
1500	45	5	1380	276	1400	66398W	66399W	66400W

Teilkreis Ø	Teeth number Z	Ø	Order number		
			Bore shape		
d01	[Stück]	d1	A	B	C
160	80	150	66401V	66402V	66403V
210	105	200	73000V	73001V	73002V
220	110	210	73003V	73004V	73005V
230	115	220	73006V	73007V	73008V
240	120	230	73009V	73010V	73011V
250	125	240	73012V	73013V	73014V
260	130	250	73015V	73016V	73017V
270	135	260	73018V	73019V	73020V
280	140	270	73021V	73022V	73023V
300	150	290	73024V	73025V	73026V
310	155	300	73027V	73028V	73029V
320	160	310	73030V	73031V	73032V
330	165	320	73033V	73034V	73035V
340	170	330	73036V	73037V	73038V
350	175	340	73039V	73040V	73041V
360	180	350	73042V	73043V	73044V
372	124	360	73045V	73046V	73047V
384	128	370	73048V	73049V	73050V
396	132	380	73051V	73052V	73053V
402	134	390	73054V	73055V	73056V
414	138	400	73057V	73058V	73059V
423	141	410	73060V	73061V	73062V
432	144	420	73063V	73064V	73065V
444	148	430	73066V	73067V	73068V
456	152	440	73069V	73070V	73071V
462	154	450	73072V	73073V	73074V
483	161	470	73075V	73076V	73077V
492	164	480	73078V	73079V	73080V
504	168	490	73081V	73082V	73083V
513	171	500	73084V	73085V	73086V
522	174	510	73087V	73088V	73089V
534	178	520	73090V	73091V	73092V
546	182	530	73093V	73094V	73095V
552	184	540	73096V	73097V	73098V
564	188	550	73099V	73100V	73101V
576	192	560	73102V	73103V	73104V
594	189	580	73105V	73106V	73107V
603	201	590	73108V	73109V	73110V
612	204	600	73111V	73112V	73113V
624	208	610	73114V	73115V	73116V
636	212	620	73117V	73118V	73119V
642	214	630	73120V	73121V	73122V
654	218	640	73123V	73124V	73125V
663	221	650	73126V	73127V	73128V
672	224	660	73129V	73130V	73131V
684	228	670	73132V	73133V	73134V
693	231	680	73135V	73136V	73137V
728	182	710	66141V	66142V	66143V
748	187	730	66144V	66145V	66146V
768	192	750	66147V	66148V	66149V
792	198	770	66150V	66151V	66152V
808	202	790	66153V	66154V	66155V
828	207	810	66156V	66157V	66158V
848	212	830	66159V	66160V	66161V
868	217	850	66162V	66163V	66164V
888	222	870	66156V	66157V	66158V
920	184	900	66168V	66169V	66170V
940	188	920	66171V	66172V	66173V
960	192	940	66174V	66175V	66176V
980	196	960	66177V	66178V	66179V
1000	200	980	66180V	66181V	66182V
1020	204	1000	66183V	66184V	66185V
1040	208	1020	66186V	66187V	66188V
1060	212	1040	66189V	66190V	66191V
1080	216	1060	66192V	66193V	66194V
1100	220	1080	66195V	66196V	66197V
1120	224	1100	66198V	66199V	66200V
1220	244	1200	66386V	66387V	66388V
1320	264	1300	66389V	66390V	66391V
1420	284	1400	66392V	66393V	66394V
1520	304	1500	66395V	66396V	66397V
1620	324	1600	66398V	66399V	66400V

Other version on request


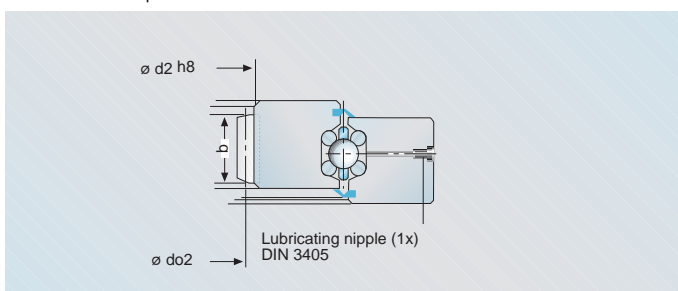


Inner gear

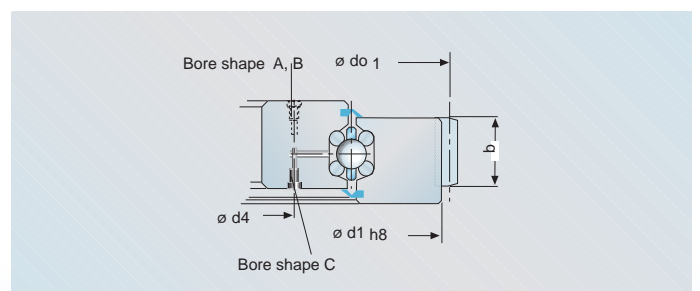

Outer gear

Antifriction wire race bearings

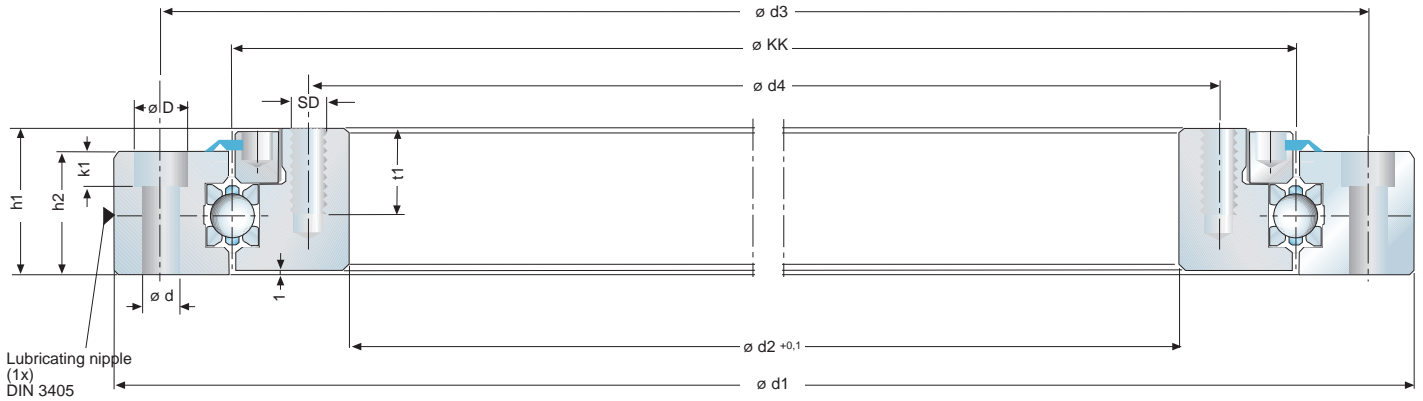

KK	Diameter				Height		Fastening				k1	SD	t1	Load rating		Weight	Order number
	D	d	d1	d2	h1	h2	d3	d4	Screws per ring	C				Co			
200	11	6,6	250	150	30 <sup>±0.3</sup>	24	235	165	8xM6	6,8	M6	15	18	50	5,0	<a href="#">66276A</a>	
300	15	9,0	360 <sup>-0,1</sup>	240	38 <sup>±0,4</sup>	31	340	260	12xM8	9,0	M8	20	21	78	11,6	<a href="#">66277A</a>	
400	18	11,0	470 <sup>-0,15</sup>	330	44 <sup>±0,5</sup>	37	445	355	14xM10	11,0	M10	25	24	105	21,6	<a href="#">66278A</a>	

Dimensions [mm], Weight [kg] \* DIN ISO 286

### Consists of:

- Inner and outer ring of steel
- Bearing element series LER (see page 14)
- Seal on upper side of the bearing

### Features:

- ready-to-mount bearing assembly
  - three diameters available from stock
  - standard bore shape
  - highest stiffness
  - cost effective
  - with serial request also available in other diameters
  - with serial request also available in other material
  - calculation programm to find the best suitable bearing
- Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the bearing size for you

### Lubrication:

- with ball bearing grease. For more information see page 27.

### Temperature:

- Standard: Continuous operation: -30°C to +80°C, short time operation max. 100°C
  - Optional: Continuous operation -30°C to +180°C
- Please consult us

### Adjustment:



- Preload ex works (see diagram 1) via thread ring

### Circumferential speed:

- with seal max. 10 m/s
- without seal max. 12 m/s

	Inner outer ring	Race ways	Antifric-tion bearing	Strip cages	Seal
Standard	C45N	54SiCr6	100Cr6	PA12	NBR
Special					


Tab.1 Material

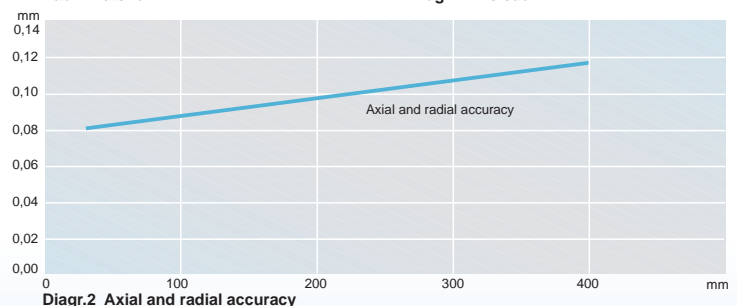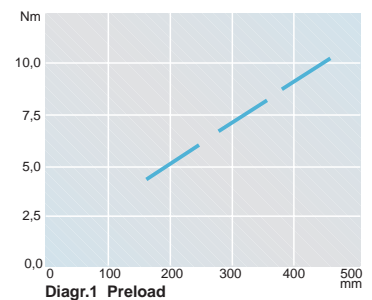

# Accessories

## Antifriction bearings

### Stripe cages, series LKB

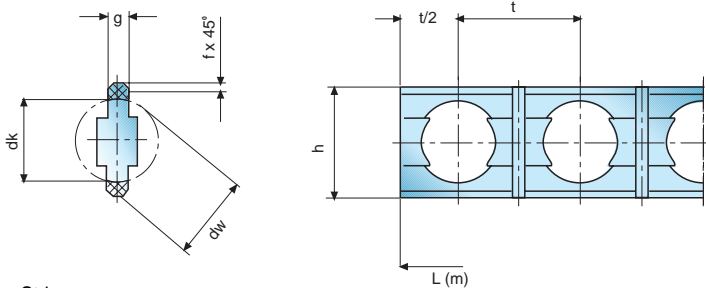

Stripe cage

Cage Size	dw mm	Zoll	h	g	t	f	Order number (per meter)
LKB5	5,0	3/16	7,6	1,5	7,5	0,4	78916A
LKB6	6,0		8,6	1,6	8,8	0,4	78917A
LKB8	8,0	5/16	10,6	2,0	12,0	0,6	78918A
LKB9	9,0	11/32	11,6	2,0	11,5	0,7	78919A
LKB9,5	9,5	3/8	12,6	2,5	14,0	0,7	78920A
LKB10	10,0		13,2	2,5	14,0	0,7	78921A
LKB11	11,0		13,7	2,5	14,0	0,7	78922A
LKB12	12,0		15,0	2,5	16,0	0,7	78923A
LKB15	15,0		18,6	3,0	18,6	0,7	78924A
LKB16	16,0		19,6	3,0	20,0	0,7	78925A
LKB20	20,0	25/32	24,2	3,5	26,0	0,7	78926A

Dimensions [mm]

The strip cage consists of wear resistant HD polyamide. It is suitable for high circumferential speeds for bearings with horizontal and vertical axis of rotation. We supply strip cages ready for installation equipped with balls. The required number of balls is calculated as follows:

$$Z = \left[ \frac{\text{ØKK} \cdot \pi}{t} \right] - 1$$


Z = Number of balls  
 KK Ø = Ball pitch diameter  
 t = Ball spacing

The number of segments depends on the diameter of the bearing and on the ball size. The reference values are:

KKØ	< 200	200-399	400-799	800-1500
Anzahl Segmente	3-4	4-6	6-8	8-12

For special applications the cage can be delivered in one piece.

### Washers

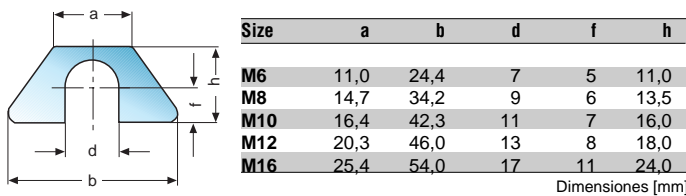

Size	a	b	d	f	h
M6	11,0	24,4	7	5	11,0
M8	14,7	34,2	9	6	13,5
M10	16,4	42,3	11	7	16,0
M12	20,3	46,0	13	8	18,0
M16	25,4	54,0	17	11	24,0

Dimensiones [mm]


Thickness	0,025	0,1	0,15	0,2	0,25	0,3	0,5	1,0
-----------	-------	-----	------	-----	------	-----	-----	-----

	Order number							
M6	79015A	79034A	79035A	79036A	79037A	79038A	79039A	79040A
M8	79041A	79023A	79042A	79000A	79026A	79043A	79044A	79045A
M10	79046A	79012A	79010A	79011A	79047A	79048A	79049A	79050A
M12	79118A	79051A	79052A	79053A	79054A	79055A	79056A	79065A
M16	79119A	79024A	79066A	79057A	79058A	79059A	79060A	79061A

Dimensiones [mm]

With large bearing diameters adjustment is simplified by inserting washers between the parted inner or outer rings. The washers are made of non-corrosive steel sheet.

### Seal

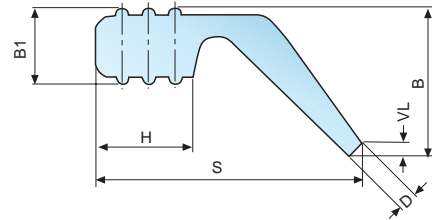


Seal

Profile S <sup>30,5</sup>	H	B <sup>30,3</sup>	B1 <sup>30,2</sup>	D	Material	Preload VL <sup>1</sup>	Weight	Order number
10	4,2	5,3	3,0	0,8	Perbunan	0,5...1,5	0,026	09080
15	5,5	8,5	4,3	1,0	70NBR/221	0,5...0,2	0,051	09190

Dimensions [mm], Weight [kg]

Franke bearing assemblies are equipped with the S10-seal.

To use seal with bearing elements you may order the seal by meter. To glue the seal ends we recommend Loctite 401®.

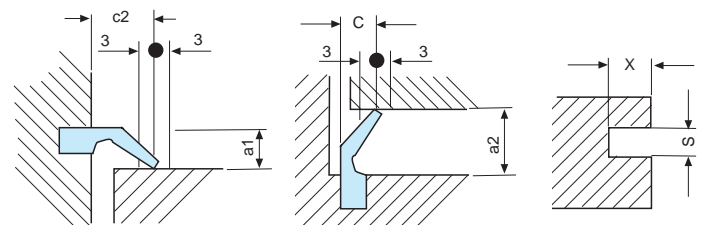

Profile S	Dimensiones				Nutmaße	
	c <sup>2</sup>	c2 <sup>2</sup>	a1 <sup>1</sup>	a2 <sup>1</sup>	t <sup>0,2</sup>	s <sup>0,1</sup>
10 <sup>±0,5</sup>	5+1	5,5 <sup>+1</sup>	3,6...4,6	4,3...5,3	4,2	3,0
15 <sup>±0,5</sup>	8+1,5	9,0 <sup>+1,5</sup>	6,3...7,7	7,5...9,0	5,5	3,9

Dimensiones [mm]




# Technical data for the determination of antifriction bearings

Bearing elements, slim bearing, bearing assemblies

**Company:**  
**Name:**  
**Department:**  
**Address:**  
**Phone:**  
**Telefax:**  
**Email:**  
**Branch:**

**Intended application:**  
 short description

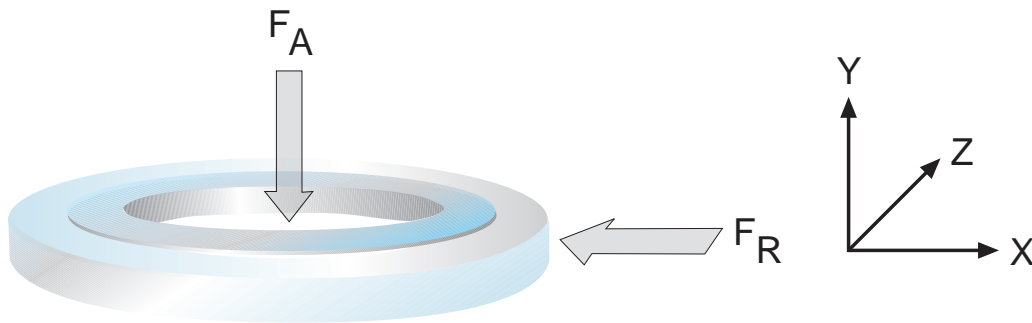

**Application:** Series \_\_\_\_\_ Material \_\_\_\_\_ Order number \_\_\_\_\_

**Force:** Load \_\_\_\_\_ Lever (x,y,z) \_\_\_\_\_

<b>+ or -</b>	<b>F<sub>A</sub> + or - X - coordinates (+ or -)</b>	<b>Z - coordinates (+ or -)</b>	<b>Static</b>	<b>Dynamic</b>
<b>+ or -</b>	<b>F<sub>R</sub> + or - Y - coordinates (+ or -)</b>	<b>Z - coordinates (+ or -)</b>	<input type="checkbox"/>	<input type="checkbox"/>

**Example:** + F<sub>A</sub> = 100 N + x = 30 mm

The loads resulting of accelerations have to be calculated by  $F_A = m \cdot 9,81 \text{ m/s}^2$

**Dynamic:** Revolution n = \_\_\_\_\_ min.<sup>-1</sup>  
 Torque MD = \_\_\_\_\_ Nm (that might effect a gear)

**Gear:** Drive moment \_\_\_\_\_ Nm  
 Diameter Ø \_\_\_\_\_ mm  
 Module \_\_\_\_\_ mm  
 Tooth width \_\_\_\_\_ mm  
 Material \_\_\_\_\_

Transmission  negative Transmission

**Mounting position:**  horizontal  vertikal

**Environment:**  Humidity  high temperature  
 dirty environment  shock impact

Please return the filled copy


# Technical information

## Lubrication

Sufficient lubrication should always be ensured in order to keep the friction low and to prevent the bearing from corrosion especially in the long run. Completely synthetic greases should be preferred for long time lubrication because their resistance against ageing is increased. We recommend ISOFLEX TOPAS NCA 52 (completely synthetic lubricating grease from the firm of KLÜBER), which we are using as standard lubricant. As alternative we recommend high-grade lithium soap greases on the basis of mineral oils. The consistency of the lubricants concerning basic oil, thickener, basic oil viscosity, and NLGI class has to be ensured in all cases where the lubricants are mixed up. Where extreme operating conditions or extraordinary operating parameters occur (e.g. speed, maximum temperature, radiation, vacuum) we recommend you to consult us or a grease producer.

**Filling quantity with first lubrication:** The necessary grease quantity (related to the RPM) in a bearing which is filled correctly is shown automatically when the overdose can be taken by the free space. The grease quantity is determined by the RPM. Grease filling of approx. 30 - 40% of the free space is correct for RPMs according to the parameter (n.KK diam.) < 90,000 min<sup>-1</sup>. With slow rotations and slewing motions a higher filling percentage is possible. Lubrication of approx. 20-30% has to be applied with RPMs > 90,000 min<sup>-1</sup>. This graduation is made in order to allow for the worked friction of the grease. Ex works the standard bearings are greased with a percentage of 20-30% of the free space.

**Lubrication periods:** Generally after 1000 operating hours relubrication is necessary for circumferential speeds between 3 and 5 m/s (see table). Reference values for relubrication periods with bearing temperature between 30° and 50° C approximately:

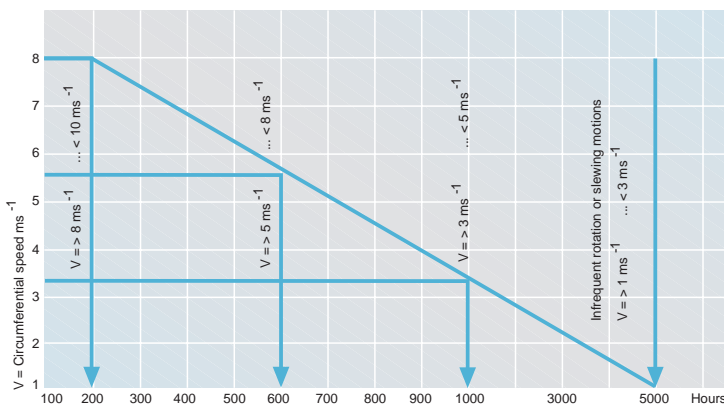

The operating conditions are varying strongly which is dependent on the different fields of application, therefore we recommend you to find out the necessary periods for relubrication by experiments and lubricant analyses which will help you to reduce the maintenance cost.

Longer relubrication periods are permissible for slewing and angular motions. Where single or infrequent movements are effected the relubrication period can be determined according to the ageing resistance of the lubricant. Relubrication is indispensable before and after relatively long periods out of operation. In our experience the relubrication period of lubricants based on refined oil is reduced to half of the initial value every 15°C, starting from an operating temperature of 70°C.

**Relubrication quantity:** For our standard bearings (Series LDL) the relubrication quantity can be calculated according to the following thumbrule:

$$m \text{ [gramm]} = KK \text{ [mm]} \cdot \frac{h_2}{3} \text{ [mm]} \cdot x$$

KK represents the mean bearing diameter, h<sub>2</sub> the height of the bearing ring.

The factor x can be taken from the following table:


x	0,002	0,003	0,004	0,005
Relubrication	weekly	monthly	every year	every 2-3 years

## 1. Adjustment of the bearing clearance

### 1.1 Bearing elements

#### a) Solid adjustment

With 4-point contact bearings one of the contacting faces of the parted inner or outer rings is provided as adjusting surface. This mating surface has to be dimensioned by grinding (or turning), therefore the centering collar has to be attached to the contact surface. The contact surface on the opposite side of the adjusting surface is not allowed to show any runout in relation to the race ring beds.

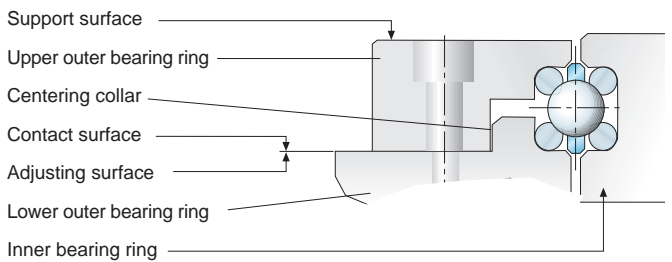

#### b) Adjustment by washers

Washers between the parted inner or outer ring simplify the adjustment. We supply washers made of non-corrosive steel sheet in various dimensions (see accessories page 22).


### 1.2 Slim bearings, low noise bearings

Franke slim bearings and low noise bearings are also available in diverse versions from clearance to preload. Primary pre-condition to reach precise geometry of the clearance is to keep the dimensional and shape tolerances which we recommend for shaft and housing seat. In addition sufficient strength of the shape of the adjusting rings has to be kept which is normally obtained by a screw arrangement which ensures high safety against changing operating forces. The third factor is precise observance of the axial mounting dimensions, which are not allowed to differ by more than 0.02 mm related to the total circumference on the same bearing ring. Adjustment of the low noise bearing is effected by the adjusting surface (solid adjustment) or by washers. With the slim bearing the mounting dimension can also be reached by adjustment. For applications beyond the proposed classes of preload adjustment can be reached by washers in a limited range. Please consult us.

The choice of the class of preload depends on kind of loading, speed, and the required plane and axial accuracy. We offer two classes of preload:


Class PL1 static safety SST > 15 and V > 6 ms<sup>-1</sup>

Class PL2 static safety SST > 6,5 up to ≤ 15 and V ≤ 6 ms<sup>-1</sup>

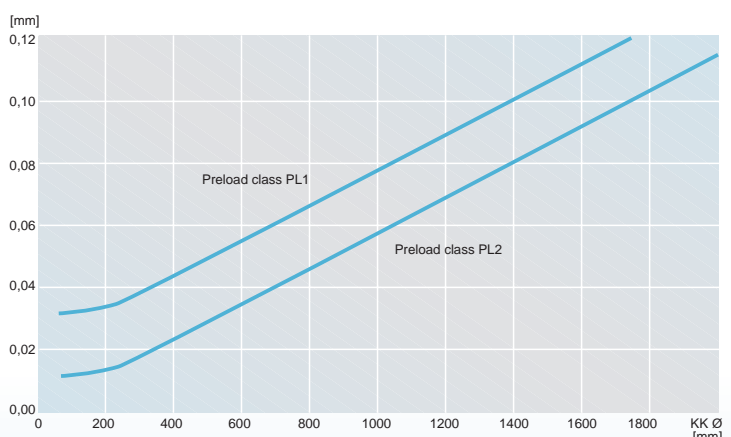

## 1.3 Bearing assemblies

Franke bearing assemblies of the selection series are adjusted in a range of clearance from 0.02 mm to preload. The amount of preload is limited by the torque according to the following diagram.

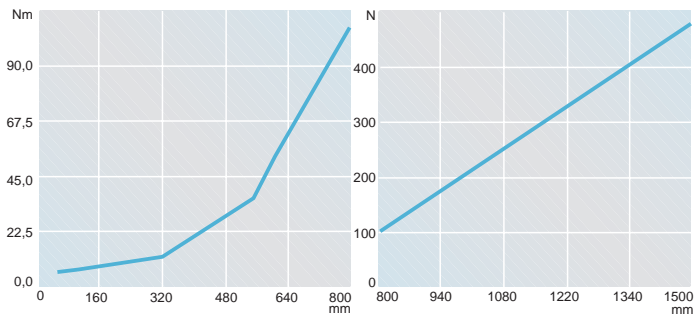

## 2. Special adjustment


The special design of Franke antifriction bearings allows sensible adjustment (3-ring-bearing). Bearing clearance and preload depend essentially on the application of the bearing.

The permissible limiting values depend on the respective stress conditions. Please consult us.

## 3. Running accuracy


The following diagram shows the precision range which applies to the bearing assemblies of our selection series. In special cases where these values are not sufficient we can supply special bearings with higher precision.

With Franke bearing elements, slim bearings and low-noise bearings similar accuracies are possible. Please request.

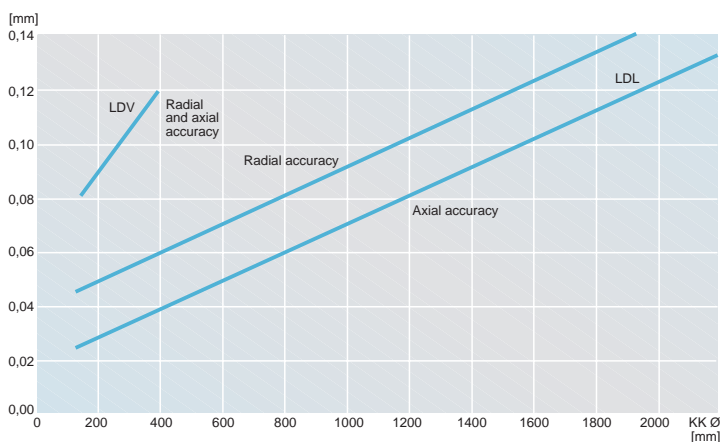

## 4. Radial / axial runout

Easy running, high operating accuracy, high carrying capacity and long life are the most significant features of Franke bearings. This presupposes exact machining of every supporting ring and careful assembly of the bearing.

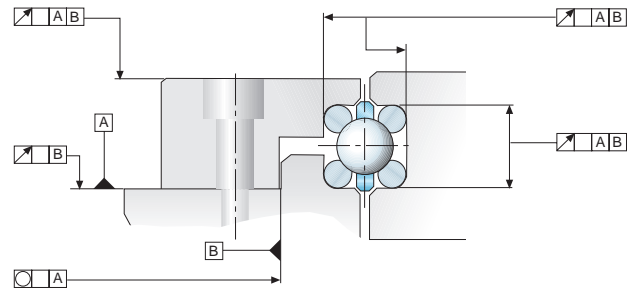

Precise machining of the structural parts mating to the Franke bearing is an indispensable precondition for troublefree functioning of the bearing. The grooves where the bearing rings resp. elements rest have to be even and accurate to shape and dimension. This requires that the cross sections of the mating structure are sufficiently strong to shape and design. The radial and axial errors of all diameters and faces which are correlated to each other should be as small as possible. Depending on the type the max. permissible error should be less or equal to the difference between the total of errors and the expected running accuracy of the mounted bearing.

**The optimum precision is obtained where the mating structural parts are designed in such a way that machining of all diameters and faces which are correlated to each other can be made in one chucking.**

## 5. Hints for design and mounting

### 5.1 Bearing elements

#### a) General note

Like any other high-grade machine component Franke bearing elements require careful handling during transport and assembly. Transport and stockage should be effected in horizontal position. Shocks especially in radial direction have to be avoided.

#### b) Gap on the race ring

The race rings are left open. The gap at the joint should not exceed 1/3 of the bearing cross section when the race ring is inserted.

#### c) Mounting the race rings

A thin layer of grease applied to the race ring bed can serve to keep the one- or multipiece race rings in their desired position. When inserting the race rings it has to be ensured that the joints are offset by approx. 90°.

Please observe our mounting and maintenance instructions which are enclosed to the delivery.

### 5.2 Slim bearings

Contrary to the closed and ground slim bearings which are usual in trade the operating clearance of the Franke slim bearings does not depend on the fit of the bearing seat of the inner or outer bearing ring.

Therefore mounting and dismantling is easier and does not require any special tools or thermal measures to be taken. With Franke slim bearings the axial preload of the inner and outer ring is the variable factor which is determined according to the provided kind of operation. Also the geometric adaption behaviour of the mating parts during the running in period is made allowance for.

Correct observance of the required tolerances when grinding and turning has a positive influence on the firm fit of the bearing on the shaft or within the housing. The real error has only little influence on operating clearance and rotational resistance during the subsequent adjusting process.

### 5.3 Bearing assemblies

When mounting Franke bearing assemblies some important hints should be observed.

Check the mating surface of the enclosing structure for evenness. Put the bearing on the screw-on surface and check the screws for smooth rotation. Take care that the surface is clean.

Fastening of the bearing to the mating structure should be effected gradually and crosswise with a torque wrench. With this the permissible tightening torques are to be kept. Should the rotational resistance be increased after mounting at an unacceptable rate this is often a consequence of uneven plane surfaces of the mating structure. For securing the screwed connections we recommend you to use appropriate securing means.

## 6. Screwed connections

Fastening of the complete bearing assembly to the mating structure is made by the bores which are indicated in our selection series. Number and dimensions are shown in the respective tables. To secure the screwed connections we recommend you to use appropriate securing means.

Tightening torque of screws

	Quality	
	8.8 [Nm]	12.9 [Nm]
M6	10	17
M8	25	41
M10	49	85
M12	86	145
M16	210	355

## 7. Circumferential speed

The permissible limiting speed is with

grease lubrication	10m/s
oil lubrication	12m/s
2row angular ball bearing	18m/s

## 8. Seal

Seals shall protect the bearing system against the penetration of contamination and prevent the lubricant from leaking. Franke bearing assemblies of the standard series are equipped with seals. They work troublefree up to a speed of 5m/s.

**In addition we ask you to observe our mounting and maintenance instructions which are enclosed to every consignment.**



## Application samples Linear Guides

Aluminium roller guides are available in various series. You can select the series that suits your application best.

Due to the modular design the components of the different series can be combined individually.


With serial request we also offer customized cassettes.

All series and sizes are available as double rails with cassettes or as single rails with roller shoes.



Provisioning unit for medical equipment. The Franke aluminium roller guide produces easy and silent displacement.

(Photo Dräger)

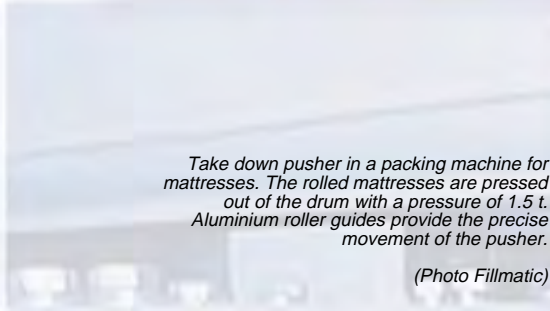


Take down pusher in a packing machine for mattresses. The rolled mattresses are pressed out of the drum with a pressure of 1.5 t. Aluminium roller guides provide the precise movement of the pusher.

(Photo Fillmatic)



Embroidery automate with movable embroidery frames. The aluminium roller guide moves in short strokes with high frequency, thus allowing detailed embroidery patterns.

(Photo Eisele)

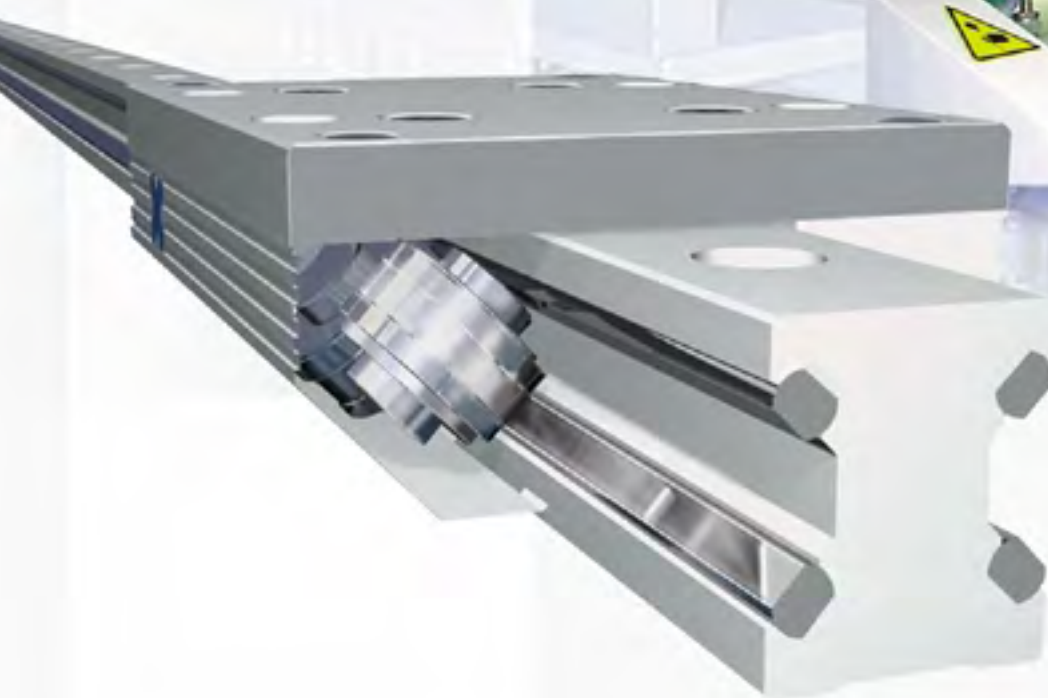


Franke aluminium roller guide in a packaging machine for quick and easy handling of boxes.

(Photo Schäfer & Flottmann)




Aluminium roller guide in a glasses engraving machine. Work piece carrier and the motorized coordinate tables are equipped with roller guides. The very good running behaviour and precision of the installation allows extremely fine engraving.

(Photo Kasch)

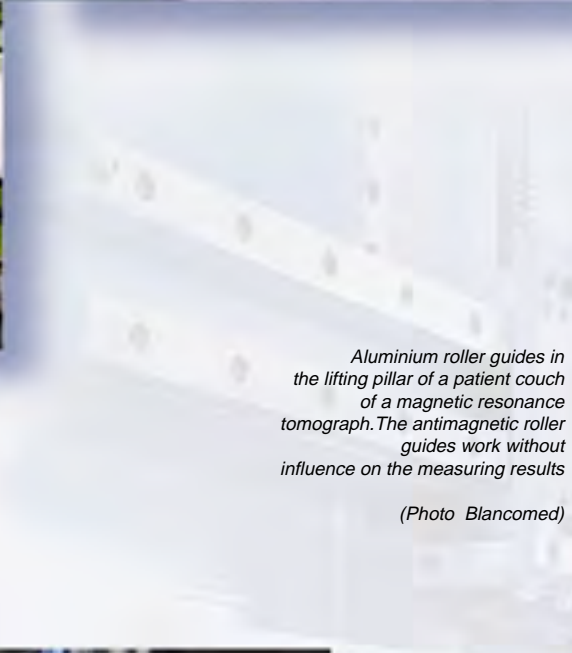

Aluminium roller guides in the lifting pillar of a patient couch of a magnetic resonance tomograph. The antimagnetic roller guides work without influence on the measuring results

(Photo Blancomed)

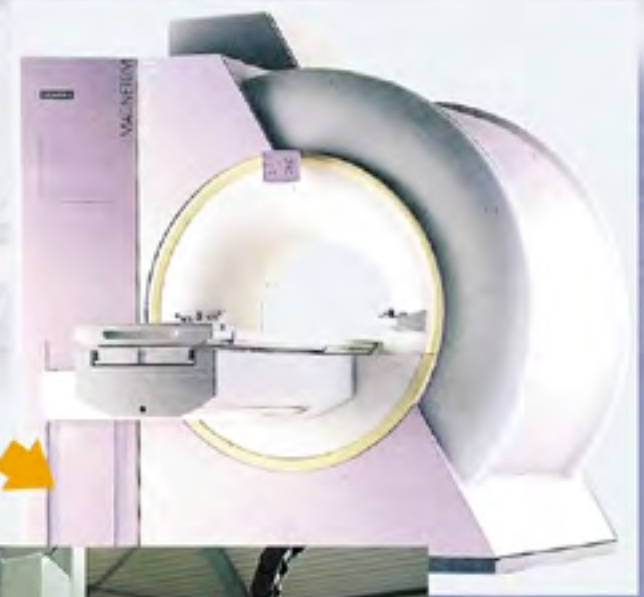

Handling device for paper stacks. The aluminium roller guides move jigs and stops reliably in permanent operation.

(Photo Solms)



# Application samples Linear Guides

*Aluminium roller guides have been successful in various branches and applications.*

*They are reliable components in machinery, packaging, food industries, handling, roboting and transport.*

*Take advantage of the performance and universality of Franke guide systems. We are gladly prepared to make a quotation for your special application.*




*Multiaxis positioning unit for a welding machine. Tools and the material can be moved individually by aluminium roller guides.*

*(Photo Schnelldorfer)*



*Aluminium roller guide in food industries. Non-corrosive components make the guide system suitable for food and packaging.*

*(Photo Volpak)*

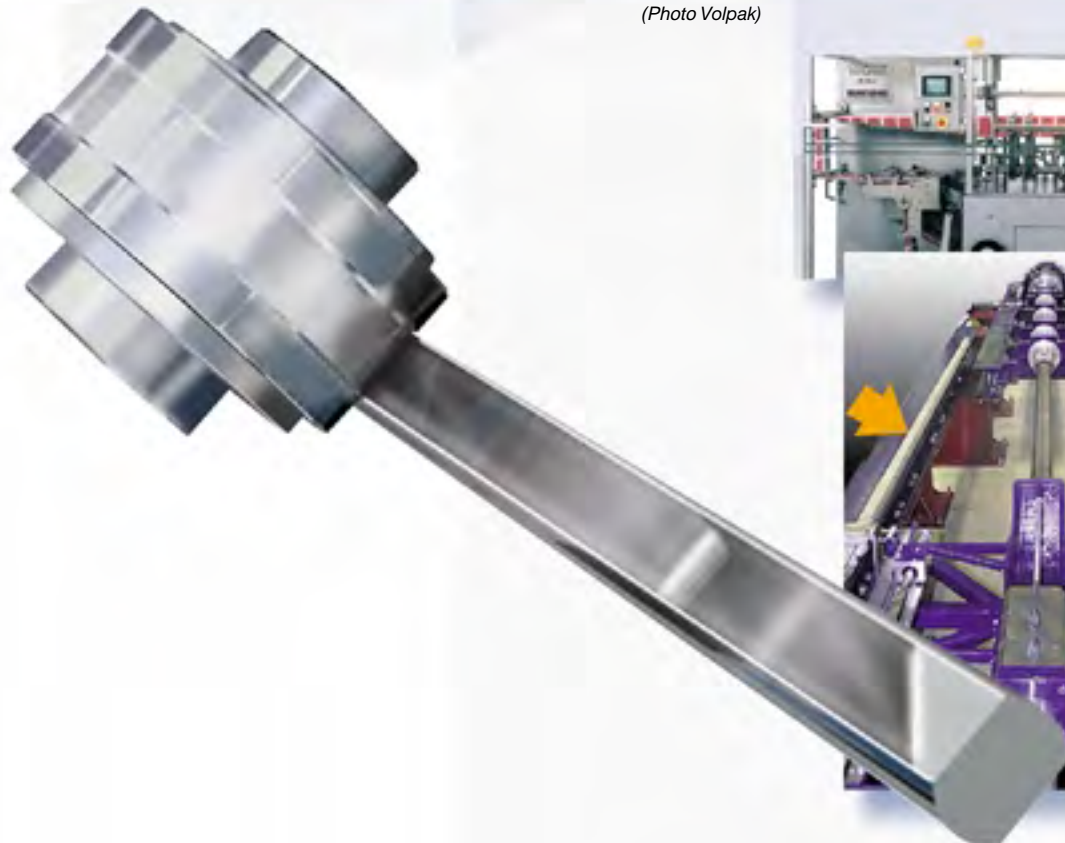

*Coupled roller guides in a crash test application. The sledge moves with high dynamic acceleration.*

*(Photo Fraunhofer Institut)*



Aluminium roller guides in a welding machine. The welding head is moved horizontally with high accuracy thus enabling the machine to create small and precise welding marks.

(Photo Schnelldorfer)




Aluminium roller guide for vertical movement of a mixer. The non-corrosive guide rail is resistant against splash water.

(Photo Disperlux)

The reel machine for synthetic skins was developed according to the state of art. Fast and easy-running aluminium roller guides are used for the central horizontal movement. The large-dimensioned running rollers which rest on needle bearings and sustain loads from any direction.

(Photo SMB)

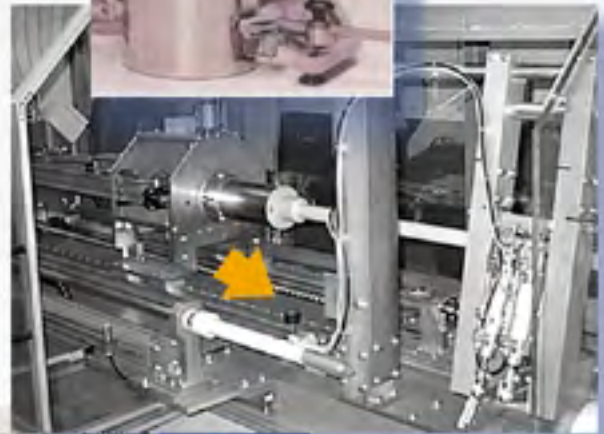

Aluminium roller guide in a welding machine. High accuracy and low weight for perfect welding.

(Photo Meccanica)



Aluminium roller guide in a climate chamber. The guide system has to face temperatures from 0 to 90° C and humidity of 90%.

(Photo Kendro)



## Linear guides with recirculating elements

Your benefit:

*Low weight with  
guide rails made  
of aluminium*

*High conformity,  
high load capacity,  
high safety*

*Suitable for  
rough conditions,  
takes shocks and impacts*

*High stiffness due to  
optimized profiles and  
ground raceways made of  
spring steel*

*No bi-metal-effect when  
mounted on aluminium  
mating structure*

*Self-adjusting 4-point-geometrie  
takes equal loads from all  
directions*

*All rails can be coupled to  
endless stroke length*

*Raceways can be  
exchanged without dismounting  
of the rails,  
low maintenance costs*



### Technical details:

<b>Seal:</b>	the recirculating elements are equipped with wipers.
<b>Acceleration:</b>	max. 30 m/s <sup>2</sup>
<b>Traverse speed:</b>	max. 2 m/s
<b>Length:</b>	in one piece up to 4m, for longer strokes the rails can be coupled endlessly.
<b>Friction coefficient:</b>	0,02. With well mounted race tracks the coefficient can be reduced after 50 working hours to 0,01.
<b>Lubrication:</b>	with bearing lubrication through lubricationnipples.
<b>Material:</b>	rails: aluminium body, steel raceways raceway: high alloy spring steel recirculating elements: steel and plastic body



(Photo Grob)



(Photo Grob)















### *Aluminium linear guides Components for innovative constructions*


Franke linear guides with recirculating elements are perfectly suited for various applications in machinery, robots, portals and transport.

The technical features and economical benefits of Franke aluminium linear guides will convince you.







Please consult us for further information.

(Photo Grob)

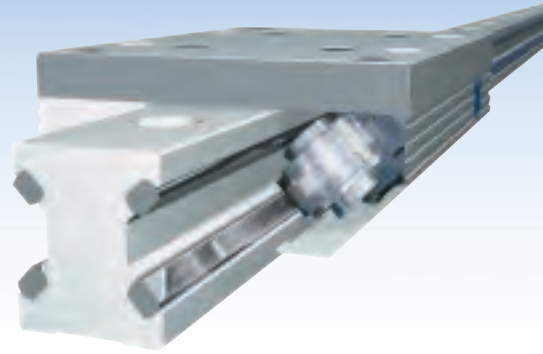	Series	Features	Speed	Running	Accuracy	Strongness	Stiffness	Page
<b>Aluminium Cassette</b> 	<b>FDA / FEA Standard</b> 	<b>the universal</b> For medium loads with stroke speed of up to 10m/s. Light-weight aluminium components and compact dimensions.	●	●	◐	◐	◐	38-39
	<b>FDB / FEB LowCost</b> 	<b>the economical</b> For light loads and particularly economical solutions.	●	●	◐	◐	◐	40-41
	<b>FDC / FEC Non-corrosive Standard</b> 	<b>the resistant</b> For application in humid or aggressive environment e.g. in liquids.	●	◐	◐	◐	◐	42-43
<b>Aluminium roller shoes</b> 	<b>FDD / FED Antimagnetic</b> 	<b>the anti magnetic</b> For all applications where magnetic material could have a disturbing influence on the production process and on its results.	◐	◐	●	●	◐	44-45
	<b>FDE / FEE Grease free</b> 	<b>the clean</b> For all applications with extreme hygienic requirements as e.g. in the food-producing industry or in clean room (e.g. in the chip production)	◐	◐	●	●	●	46-47
	<b>PDF / FEF Elastic rollers</b> 	<b>the neutral</b> Smooth and silent run, especially at the joints of the rails, minimum slide resistance	●	●	◐	◐	◐	48-49
 	<b>FDG / FEG Non-corrosive LowCost</b>  	<b>the economical resistant</b> For application in humid or aggressive environment e.g. in liquids.	●	●	◐	◐	◐	50-51




coupled rails for endless strokes


Load range [kN]	Series	one piece rail [mm]	Tech. details	Page	Accessories	Page
0 10 20 30 40 50 60 80		0 500 1500 2000 3000 4000 6000				
C <sub>0</sub> C	<b>Double rail</b> Pair of single rail  <b>FDA</b> 	12 15 20 25 35 45				
<b>FDC</b> <b>FEC</b> 	FD + FE 15 20 25 35 45	Race ways of non-corrosive steel	56-57	<b>Stop screws</b>   60		
					<b>FDD</b> <b>FED</b> 	FD + FE 25
<b>FDC</b> <b>FEC</b> 	FD + FE 15 20 25 35 45	Race ways of non-corrosive steel	56-57	<b>Cover strip</b>   61		
					<b>C</b> <b>C</b>	
<b>C</b> <b>C</b>						
					<b>C</b> <b>C</b>	
<b>C</b> <b>C</b>						
					<b>C</b> <b>C</b>	
<b>C</b> <b>C</b>						



# Aluminium cassette Standard

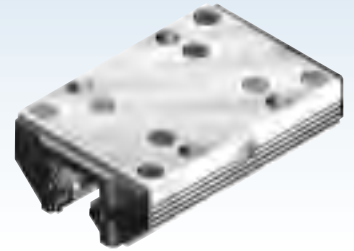

## Series FDA

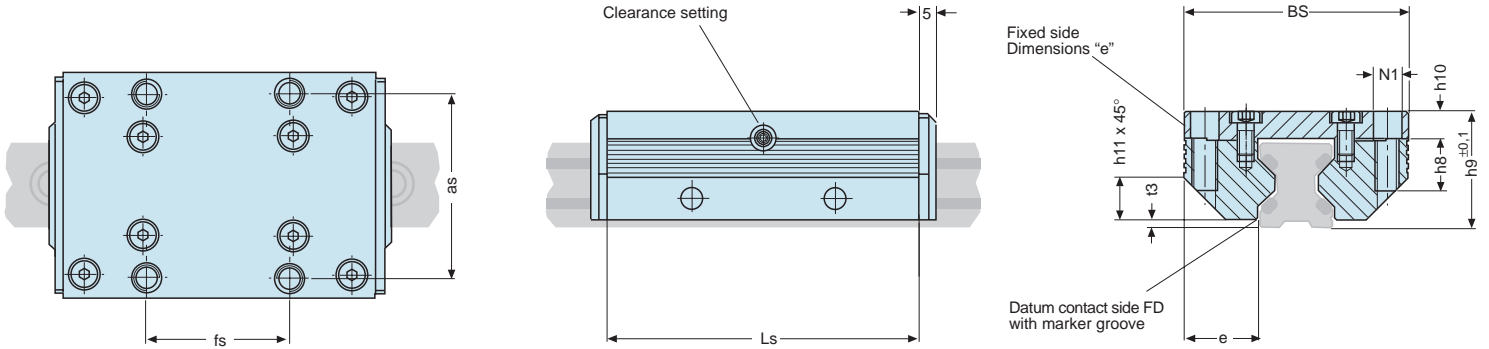

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Cassette	Order number Cassette	
	C	Co	Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
12	2800	3000	27	25	43	40	64	37	19	30	25	12,50	8	4,0	6	1,4	M4	0,1	84494A
15	4200	3400	37	45	58	72	78	47	24	38	30	15,75	10	5,0	8	2,0	M5	0,3	84396A
20	5400	5400	76	76	111	111	92	63	30	53	40	21,00	12	7,0	11	2,0	M6	0,4	84441A
25	9000	10100	158	142	222	198	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363A
35	12500	18000	423	294	559	388	135	100	48	82	62	34,00	20	10,5	20	3,5	M10	1,5	84364A
45	21200	25900	827	678	983	806	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365A

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

## Technical information cassettes and roller shoes (RSP)

### Consists of:

- Aluminium body
- 8 rollers in needle bearings
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

### Features:

- Maximum load capacity, smooth and silent running
- 45° - position of the rollers for loads from all directions
- Clip-on wipers with felt seal (metal wipers optional)
- Adjustable preload
- High dynamic load capacity
- Endless stroke lengths by coupling of rails (see page 64)
- Calculation program to find the best suitable guide size  
Our calculation program can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

### Traverse speed:

- Traverse speed up to 10 m/s
- Acceleration up to 40 m/s<sup>2</sup>

### Temperature range:

- 20° up to +100°C, short time operation +120°C

### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

### Fastening:

- with screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.


### Stiffness:

- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

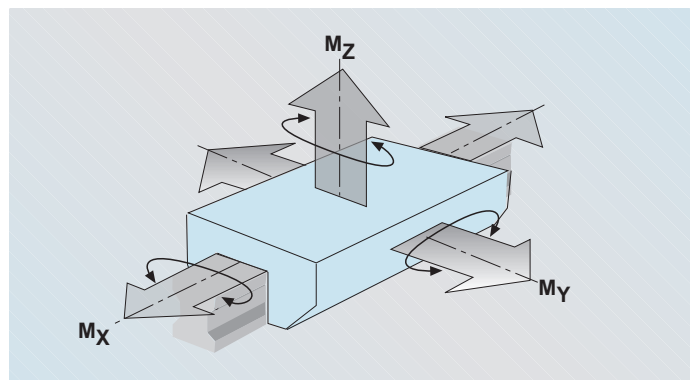


# Aluminium roller shoes

## Standard

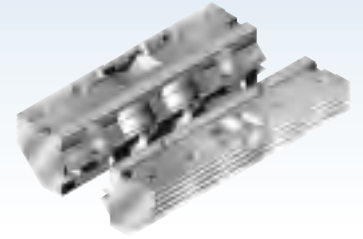




### Series FEA

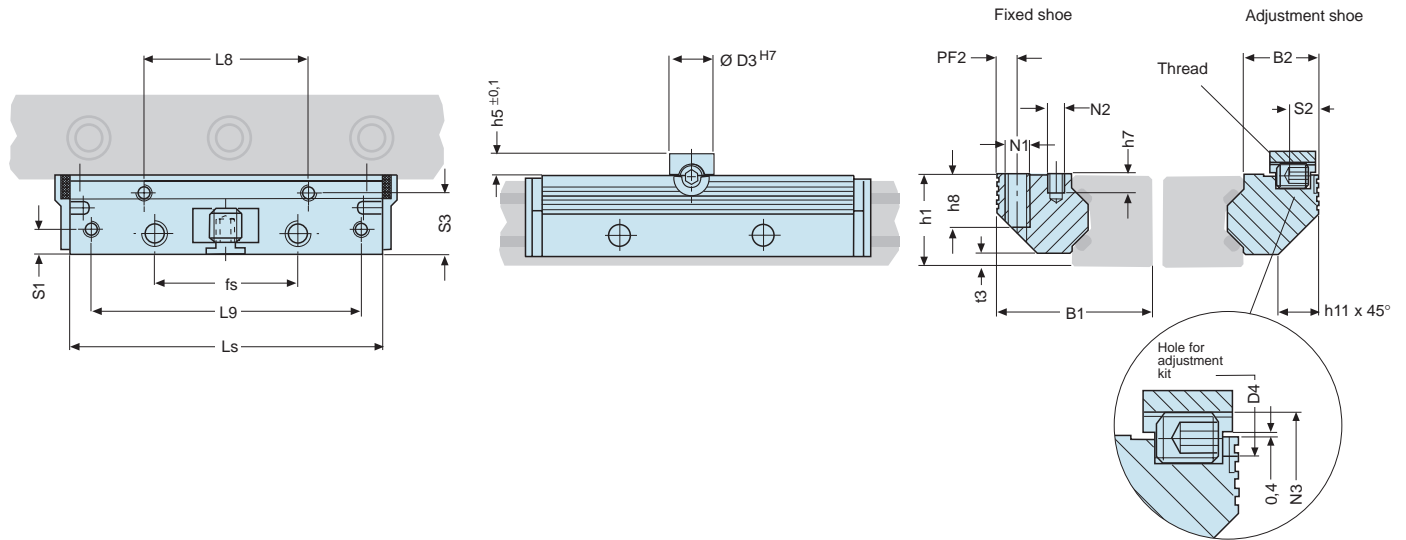

Moment load rating RSP				Dimensions				other dimensions RSP											Weight	Order number RSP				
Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	
1,5(B+30,3)	1,4(B+30,3)	43	40	64	24,4	15,0	4	3,4	25	11,9	8	3	6,0	8	29	57	M4	M3	M4	3,4	4,9	9,7	0,06	84495A
1,7(B+36,5)	2,1(B+36,5)	58	72	78	30,9	19,0	5	4,4	30	15,2	10	4	7,5	10	34	68	M5	M4	M6	4,9	5,9	12,4	0,20	84395A
2,7(B+47,0)	2,7(B+47,0)	111	111	92	40,9	23,0	5	4,9	40	20,4	10	4	8,0	12	42	80	M6	M5	M6	5,9	5,9	16,9	0,30	84442A
5,0(B+58,4)	4,5(B+58,4)	222	198	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367A
9,0(B+85,0)	6,3(B+85,0)	559	388	135	68,9	37,5	7	8,9	62	32,9	14	6	7,5	20	67	117	M10	M6	M8	8,9	8,9	28,4	1,40	84368A
12,9(B+109,0)	10,6(B+109,0)	983	806	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	84369A

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]


	Basic body	Rollers	Wipers
Standard	anodized Aluminium AlMg Si0,5 F28	Bearing steel 100 Cr 6	Plastic plate PA6 with felt wipers
Material			

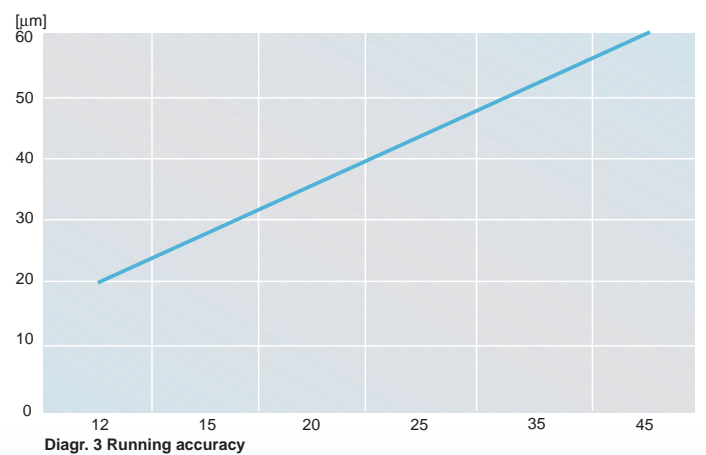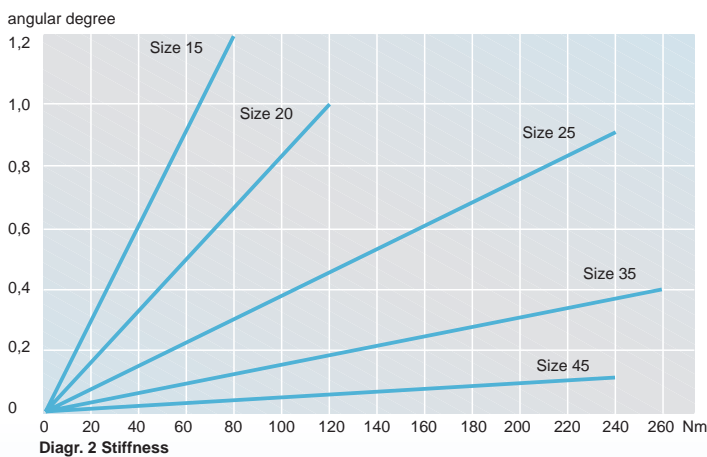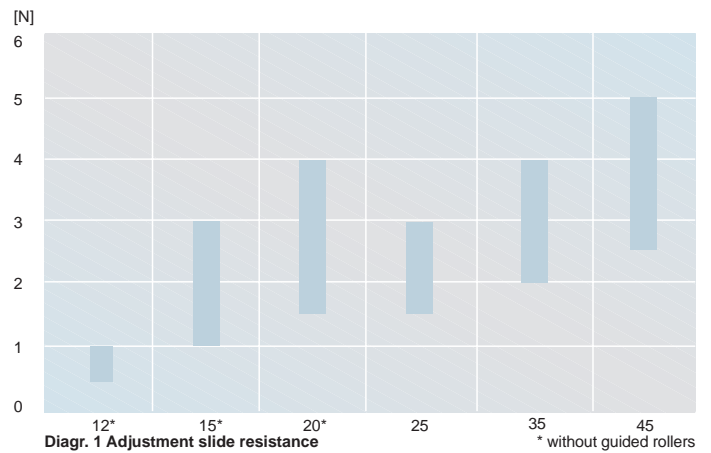




# Aluminium cassette

## Low Cost

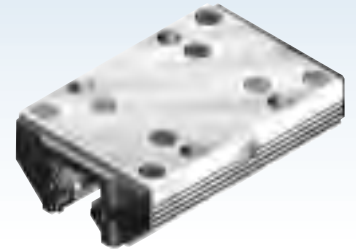

### Series FDB

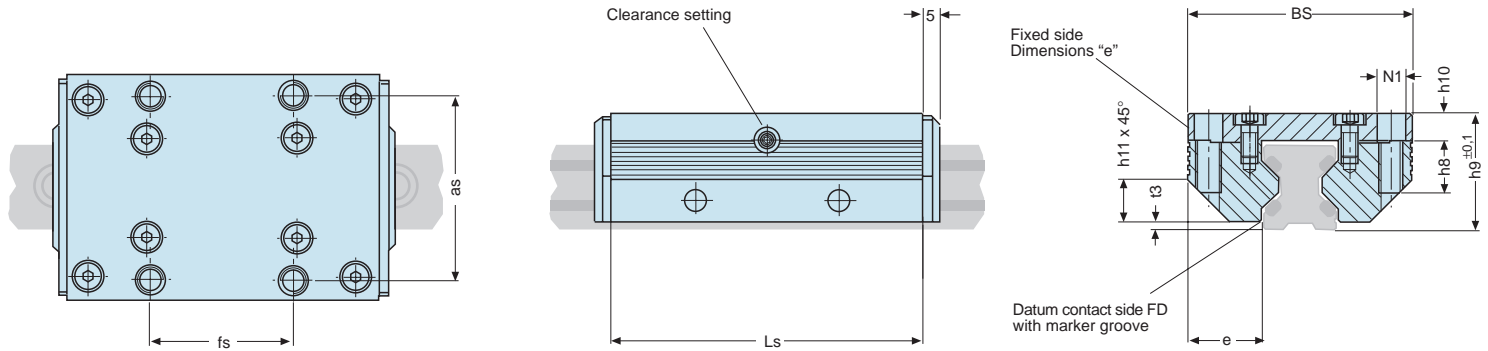

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Kassette	Order number Kassette	
	C	Co	Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
12	620	170	1,6	5,7	2,4	8,9	64	37	19	30	25	12,50	8	4,0	6	1,4	M4	0,1	84494L
15	700	230	2,5	7,5	4,0	12,0	78	47	24	38	30	15,75	10	5,0	8	2,0	M5	0,3	84396L
20	940	300	4,0	13,0	6,0	19,0	92	63	30	53	40	21,00	12	7,0	11	2,0	M6	0,4	84441L
25	1500	700	11,0	23,0	15,0	32,0	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363L
35	3100	1400	32,0	72,0	42,0	95,0	135	100	48	82	62	34,00	20	10,5	20	3,5	M10	1,5	84364L
45	6300	2700	86,0	200,0	103,0	238,0	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365L

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

### Technical information cassettes and roller shoes (RSP)

#### Consists of:

- Aluminium body
- 8 rollers in ball bearings
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

#### Features:

- Medium load capacity, smooth and silent running
- $45^\circ$  - position of the rollers for loads from all directions
- Clip-on wipers with felt seal (metal wipers optional)
- Adjustable preload
- Endless stroke lengths by coupling of rails (see page 64)
- Calculation program to find the best suitable guide size
- Our calculation program can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

#### Traverse speed:

- Traverse speed up to 10 m/s
- Acceleration up to 40 m/s<sup>2</sup>

#### Temperature range:

- - 20° up to +100°C, short time operation +120°C

#### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

#### Fastening:

- with screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

#### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

#### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.


#### Stiffness:

- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

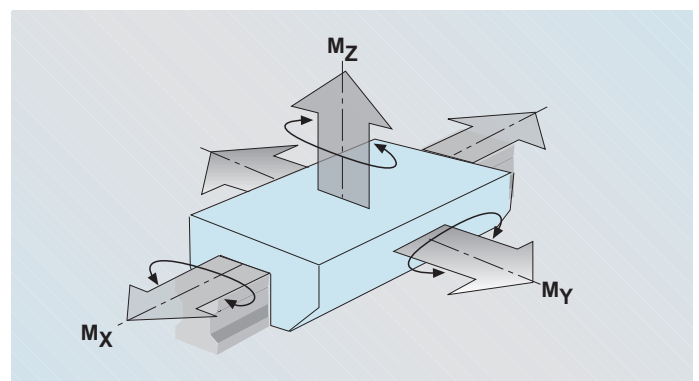


# Aluminium roller shoes

## Low Cost

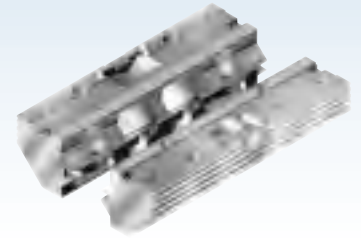




### Series FEB

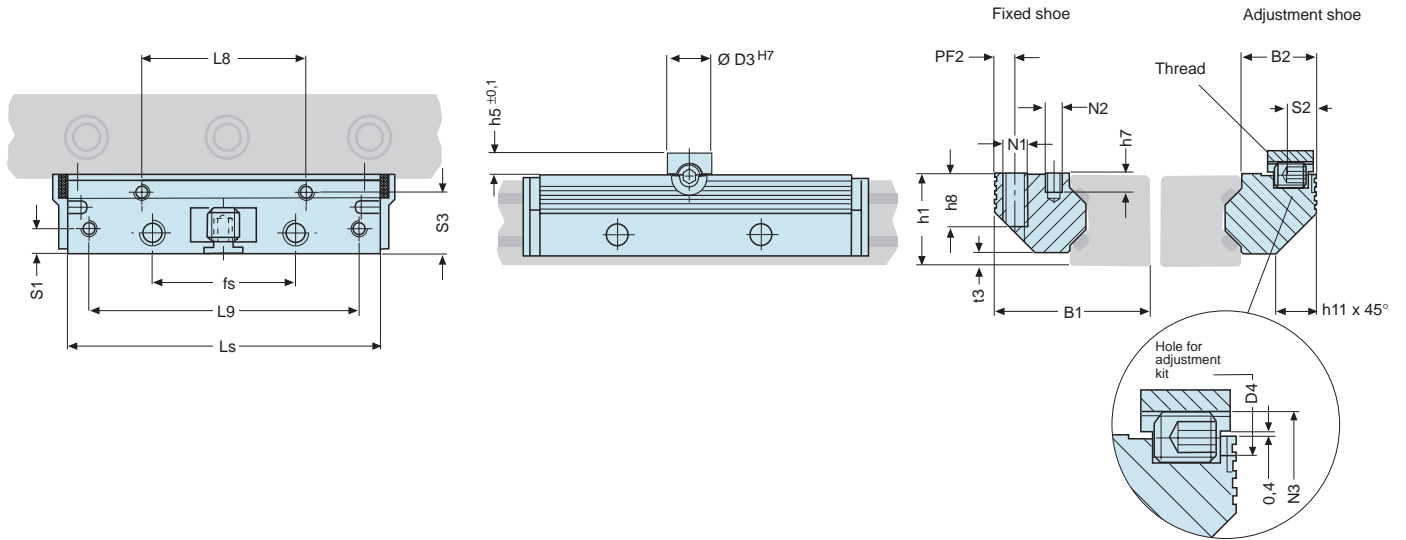

Moment load rating RSP				Dimensions				other dimensions RSP												Weight			Order number RSP	
Mocx	Mcx	Mocy/Mocx	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	
0,08(B+30,3)	0,30(B+30,3)	2,4	8,9	64	24,4	15,0	4	3,4	25	11,9	8	3	6,0	8	29	57	M4	M3	M4	3,4	4,9	9,7	0,06	<a href="#">84495L</a>
0,10(B+36,5)	0,35(B+36,5)	4,0	12,0	78	30,9	19,0	5	4,4	30	15,2	10	4	7,5	10	34	68	M5	M4	M6	4,9	5,9	12,4	0,20	<a href="#">84395L</a>
0,15(B+47,0)	0,50(B+47,0)	6,0	19,0	92	40,9	23,0	5	4,9	40	20,4	10	4	8,0	12	42	80	M6	M5	M6	5,9	5,9	16,9	0,30	<a href="#">84442L</a>
0,35(B+58,4)	0,70(B+58,4)	15,0	32,0	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	<a href="#">84367L</a>
0,70(B+85,0)	1,50(B+85,0)	42,0	95,0	135	68,9	37,5	7	8,9	62	32,9	14	6	7,5	20	67	117	M10	M6	M8	8,9	8,9	28,4	1,40	<a href="#">84368L</a>
1,40(B+109,0)	3,10(B+109,0)	103,0	238,0	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	<a href="#">84369L</a>

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]


	Basic body	Rollers	Wipers
Standard	anodized Aluminium AlMg Si0,5 F28	Bearing steel 100 Cr 6	Plastic plate PA6 with felt wipers
Material			

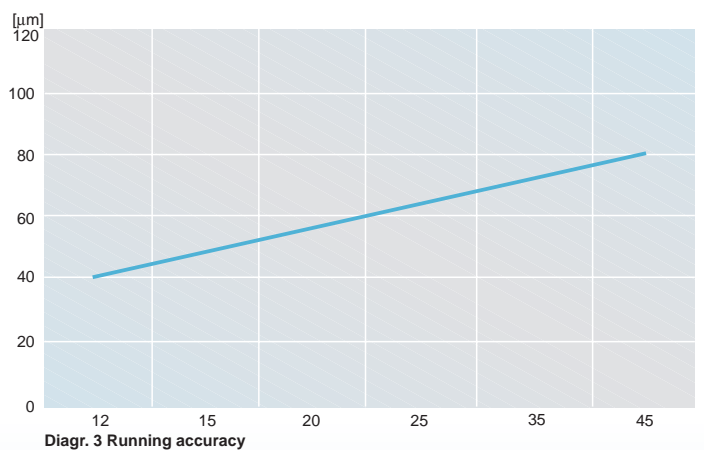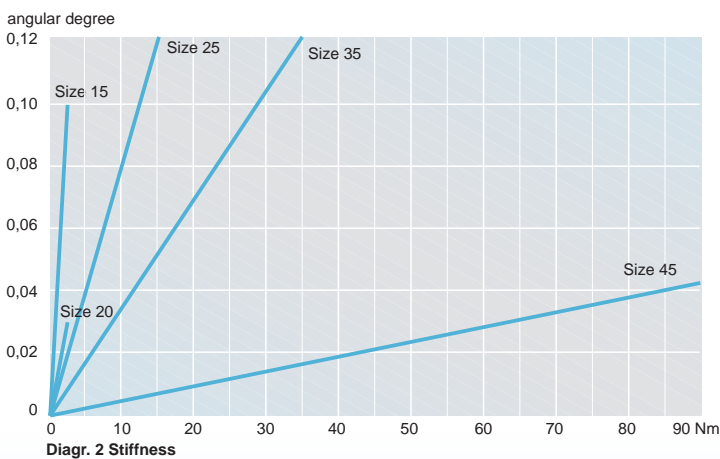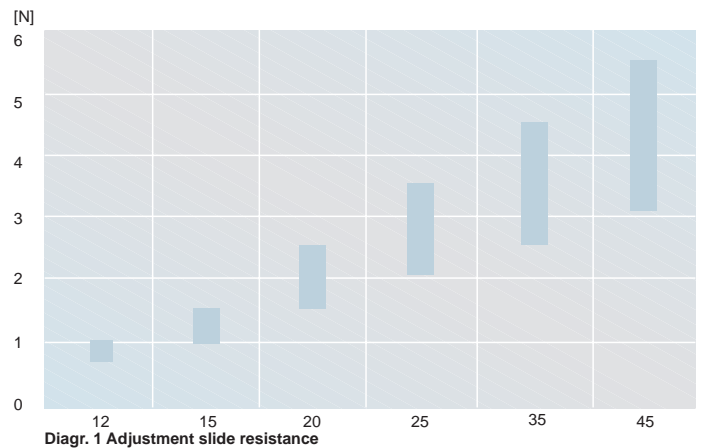




# Aluminium cassette

Non-corrosive

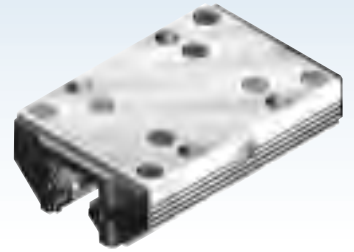

## Series FDC

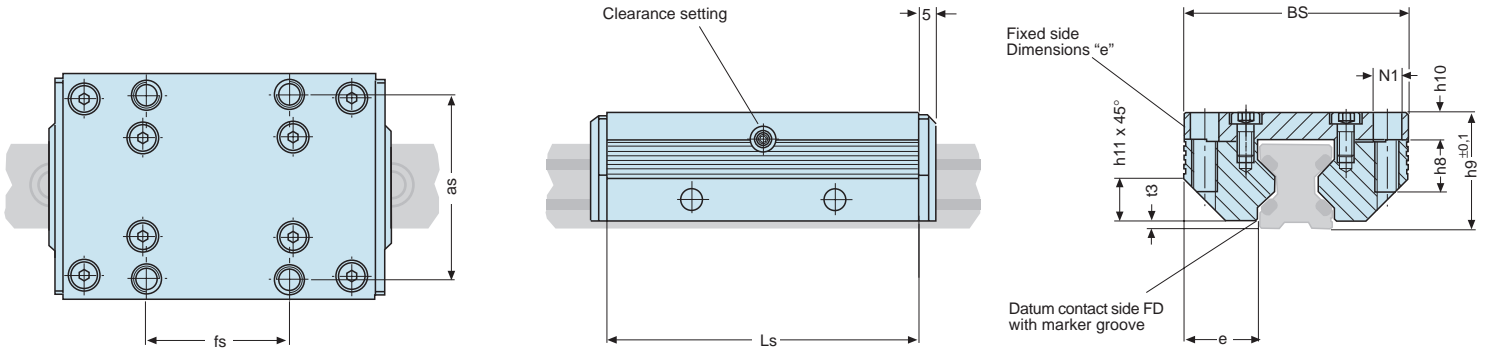

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight	Order number	Kassette
	C	Co	Mocx	Mcy/Mcz	Mocx/Mcy/Mcz	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3	N1			
12	1100	1200	11	10	17	16	64	37	19	30	25	12,50	8	4,0	6	1,4	M4	0,1	on request
15	1800	2200	23	19	37	30	78	47	24	38	30	15,75	10	5,0	8	2,0	M5	0,3	84396AN
20	2000	2500	35	28	52	41	92	63	30	53	40	21,00	12	7,0	11	2,0	M6	0,4	84441AN
25	3400	4700	75	53	105	75	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363AN
35	5600	7400	173	131	229	174	135	100	48	82	62	34,00	20	10,5	20	3,5	M10	1,5	84364AN
45	13100	16500	526	420	626	500	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365AN

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

## Technical information

### cassettes and roller shoes (RSP)

#### Consists of:

- Aluminium body
- 8 rollers in needle bearings
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

#### Features:

- Maximum load capacity, smooth and silent running
  - 45° - position of the rollers for loads from all directions
  - Clip-on wipers with felt seal (metal wipers optional)
  - Adjustable preload
  - High dynamic load capacity
  - Endless stroke lengths by coupling of rails (see page 64)
  - Calculation program to find the best suitable guide size
- Our calculation program can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

#### Traverse speed:

- Traverse speed up to 10 m/s
- Acceleration up to 40 m/s<sup>2</sup>

#### Temperature range:

- 20° up to +100°C, short time operation +120°C

#### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

#### Fastening:

- With screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

#### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

#### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.

#### Stiffness:


- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

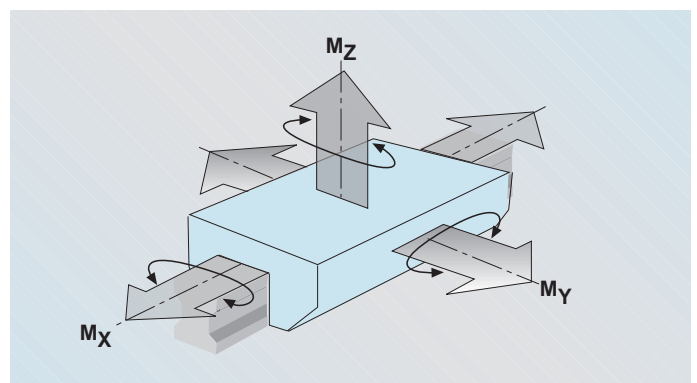

# Aluminium roller shoes

Non-corrosive




Series FEC

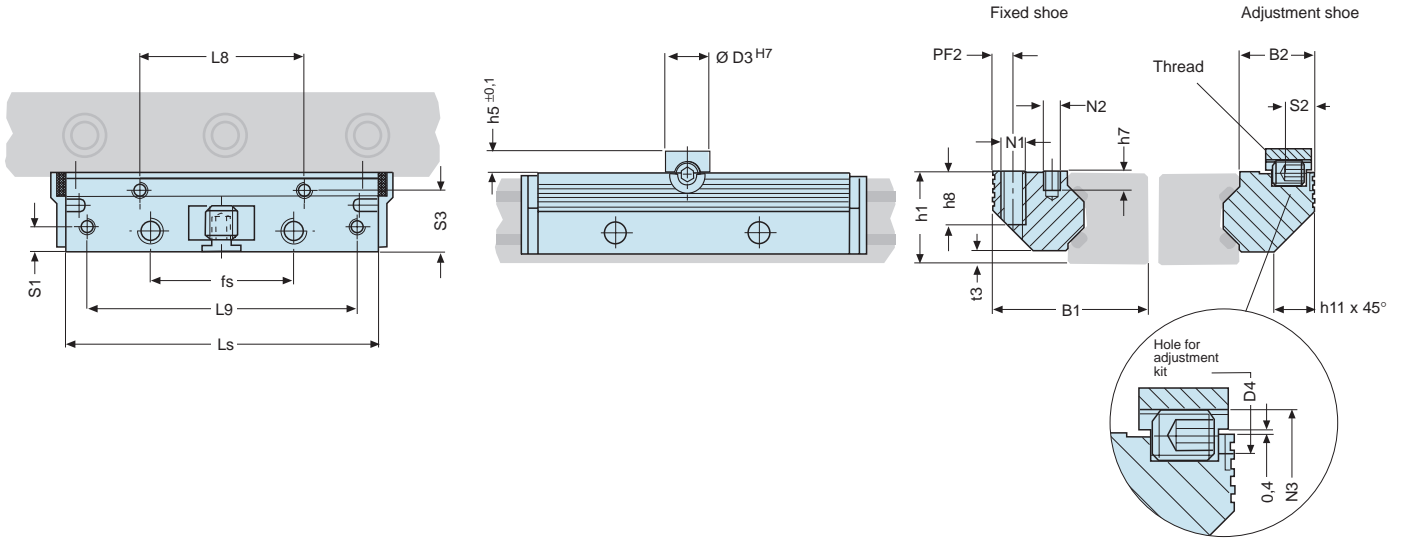

Moment load rating RSP			Dimensions			other dimensions RSP												Weight	Order number RSP					
Mocx	Mcy	Mcz	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	
0,6(B+30,3)	0,6(B+30,3)	17	16	64	24,4	15,0	4	3,4	25	11,9	8	3	6,0	8	29	57	M4	M3	M4	3,4	4,9	9,7	0,06	on request
1,1(B+36,5)	0,9(B+36,5)	37	30	78	30,9	19,0	5	4,4	30	15,2	10	4	7,5	10	34	68	M5	M4	M6	4,9	5,9	12,4	0,20	84395AN
1,3(B+47,0)	1,0(B+47,0)	52	41	92	40,9	23,0	5	4,9	40	20,4	10	4	8,0	12	42	80	M6	M5	M6	5,9	5,9	16,9	0,30	84442AN
2,4(B+58,4)	1,7(B+58,4)	105	75	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367AN
3,7(B+85,0)	2,8(B+85,0)	229	174	135	68,9	37,5	7	8,9	62	32,9	14	6	7,5	20	67	117	M10	M6	M8	8,9	8,9	28,4	1,40	84368AN
8,2(B+109,0)	6,6(B+109,0)	626	500	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	84369AN

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

Standard	Basic body	Rollers	Wipers
	anodized Aluminium AlMg Si0,5 F28	Non-corrosive steel X65 Cr13	Plastic plate PA6 with felt wipers
Material			

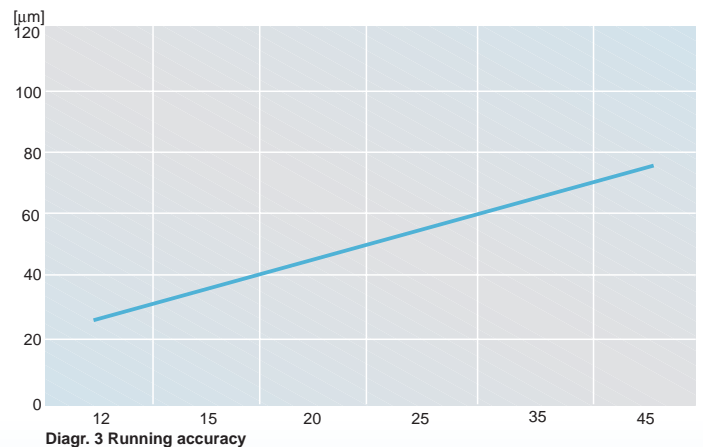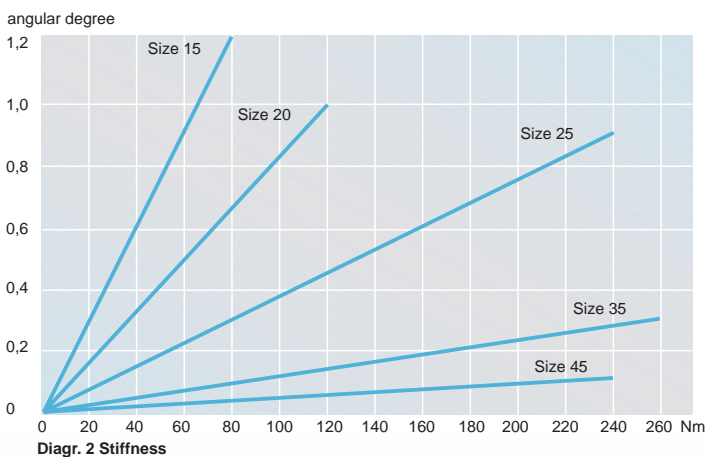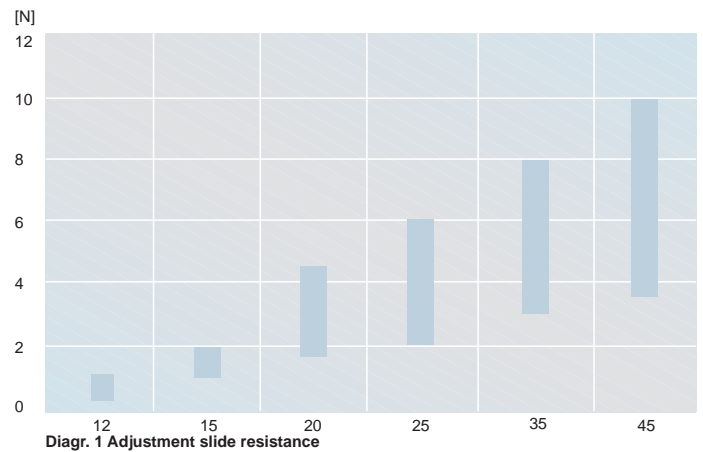


Linear guides




# Aluminium cassette

## Anti-magnetic

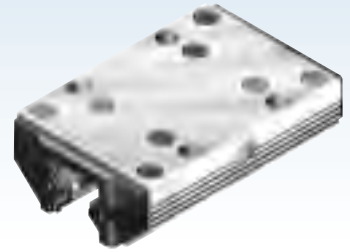

### Series FDD

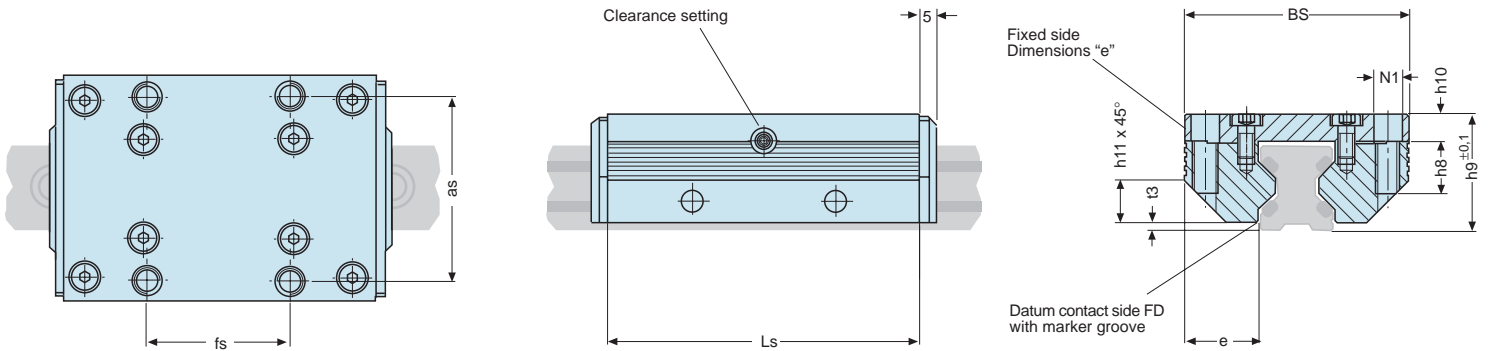

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Cassette	Order number Cassette	
	C	Co	Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
25	1200	1600	25	18	35	25	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363P

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

## Technical information

### cassettes and roller shoes (RSP)

#### Consists of:

- Aluminium body
- 8 rollers in needle bearings, anti-magnetic
- Plastic plate on both front sides with felt seal

#### Features:

- Maximum load capacity, smooth and silent running
  - $45^\circ$  - position of the rollers for loads from all directions
  - Clip-on wipers with felt seal (metal wipers optional)
  - Adjustable preload
  - Endless stroke lengths by coupling of rails (see page 64)
  - Calculation programm to find the best suitable guide size
- Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

#### Traverse speed:

- Traverse speed up to 2 m/s
- Acceleration up to  $10 \text{ m/s}^2$

#### Temperature range:

- $-20^\circ$  up to  $+100^\circ\text{C}$ , short time operation  $+120^\circ\text{C}$

#### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

#### Fastening:

- With screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

#### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

#### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.


#### Stiffness:

- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

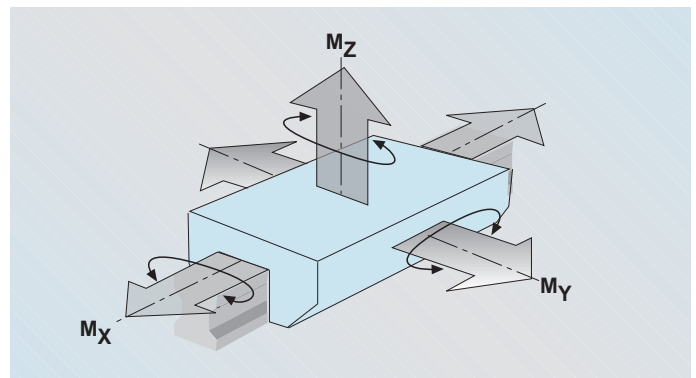


# Aluminium roller shoes

## Anti-magnetic

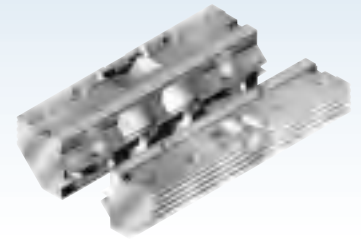




### Series FED

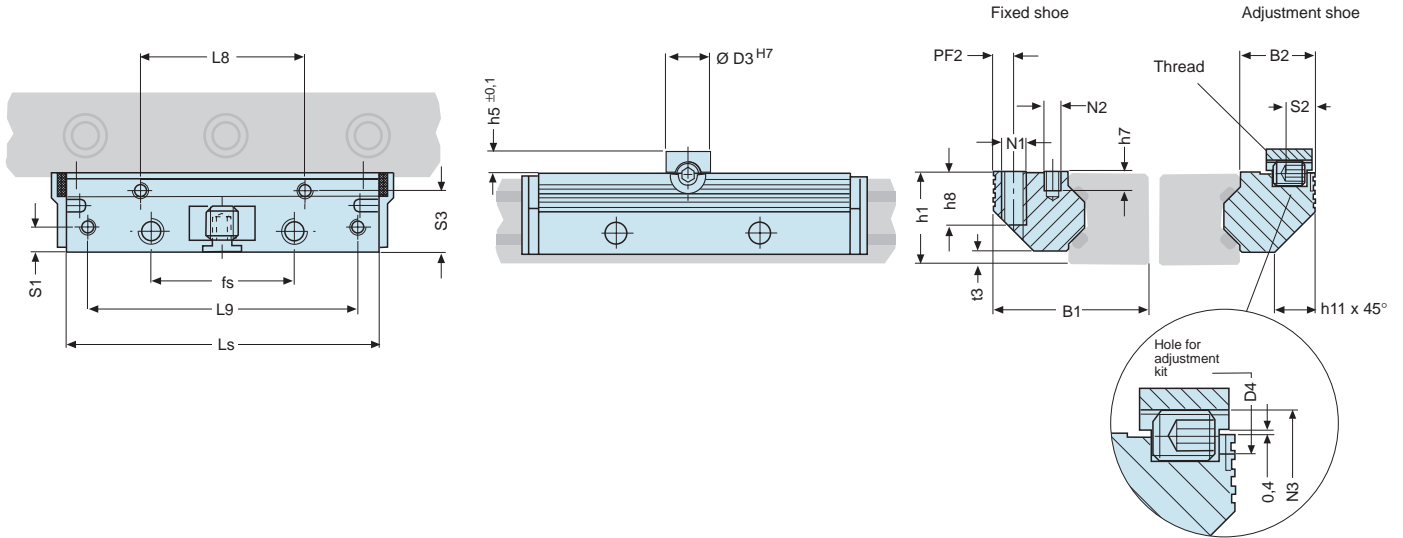

Moment load rating RSP				Dimensions			other dimensions RSP													Weight	Order number			
Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	RSP
0,8(B+58,4)	0,6(B+58,4)	222	198	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367P


Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

	Basic body	Rollers	Wipers
Standard	anodized Aluminium AlMg Si0,5 F28	Anti-magnetic steel with special coating	Plastic plate PA6 with felt wipers
Material			

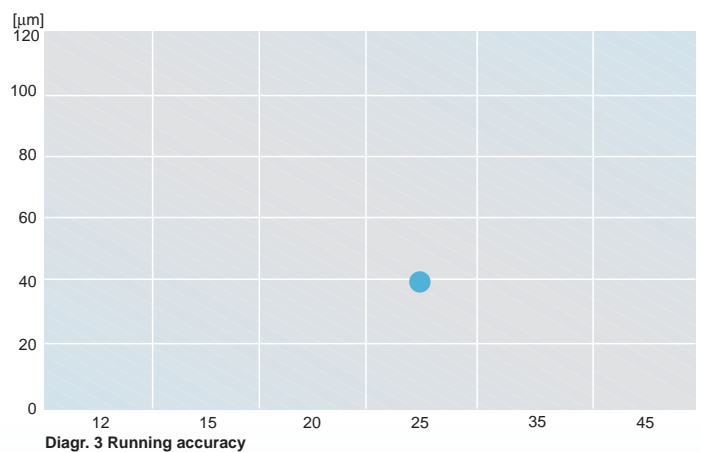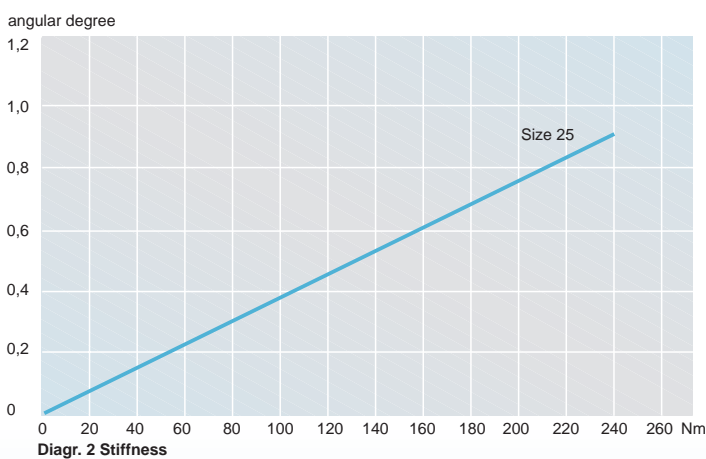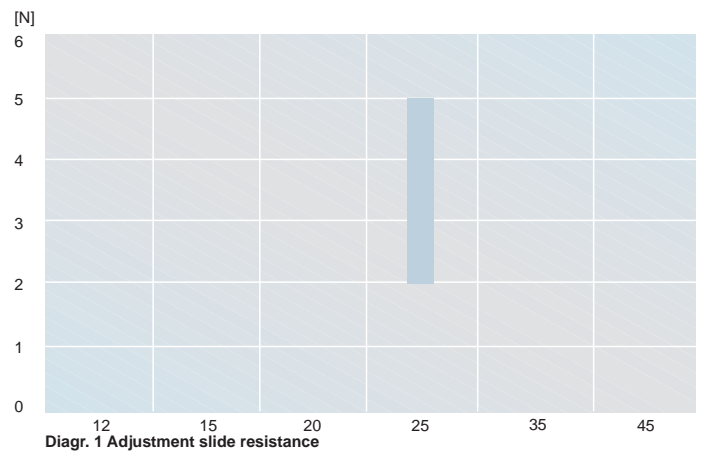




# Aluminium cassette without lubricant

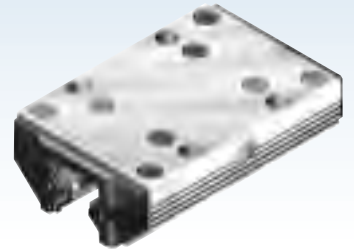

## Series FDE

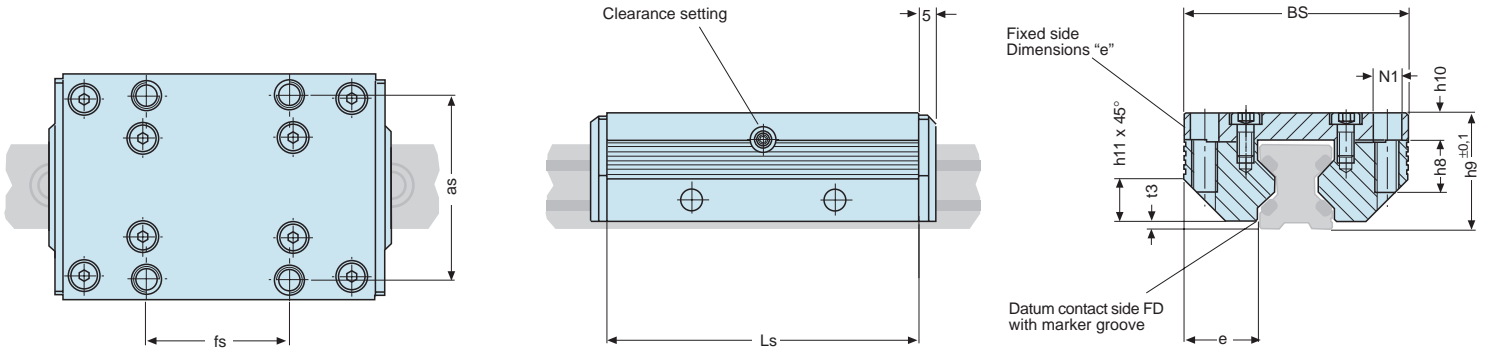

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Cassette	Order number Cassette	
	C	Co	Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
12	350	400	4	3	6	5	64	37	19	30	25	12,50	8	4,0	6	1,4	M4	0,1	84494T
15	600	700	8	6	12	10	78	47	24	38	30	15,75	10	5,0	8	2,0	M5	0,3	84396T
20	700	900	12	9	17	14	92	63	30	53	40	21,00	12	7,0	11	2,0	M6	0,4	84441T
25	1200	1600	25	18	35	25	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363T
35	2000	2500	58	44	76	58	135	100	48	82	62	34,00	20	10,5	20	3,5	M10	1,5	84364T
45	4400	5500	180	140	210	170	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365T

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

## Technical information cassettes and roller shoes (RSP)

### Consists of:

- Aluminium body
- 8 rollers in needle bearings
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

### Features:

- Maximum load capacity, smooth and silent running
- 45° - position of the rollers for loads from all directions
- Clip-on wipers with felt seal (metal wipers optional)
- Adjustable preload
- Endless stroke lengths by coupling of rails (see page 64)
- Calculation programm to find the best suitable guide size
- Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

### Traverse speed:

- Traverse speed up to 1 m/s
- Acceleration up to 10 m/s<sup>2</sup>

### Temperature range:

- 20° up to +100°C, short time operation +120°C

### Lubrication:

- Lubrication free

### Fastening:

- With screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

### Running accuracy:


- The running accuracy in diagr. 3 refers to a rail length of one meter.

### Stiffness:


- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

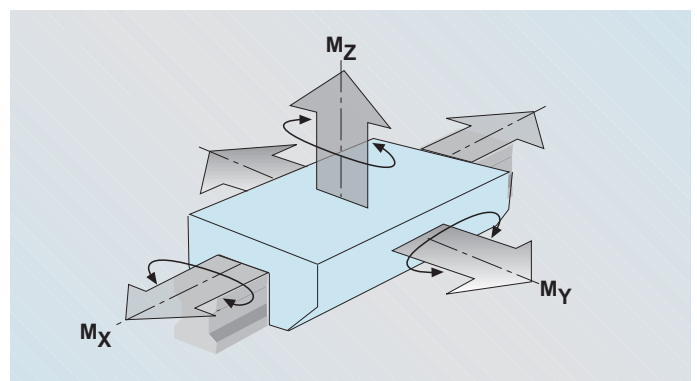

# Aluminium roller shoes without lubricant

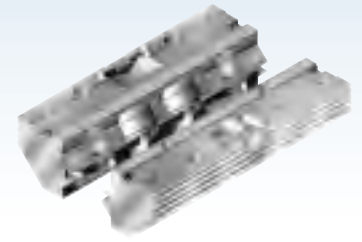




## Series FEE

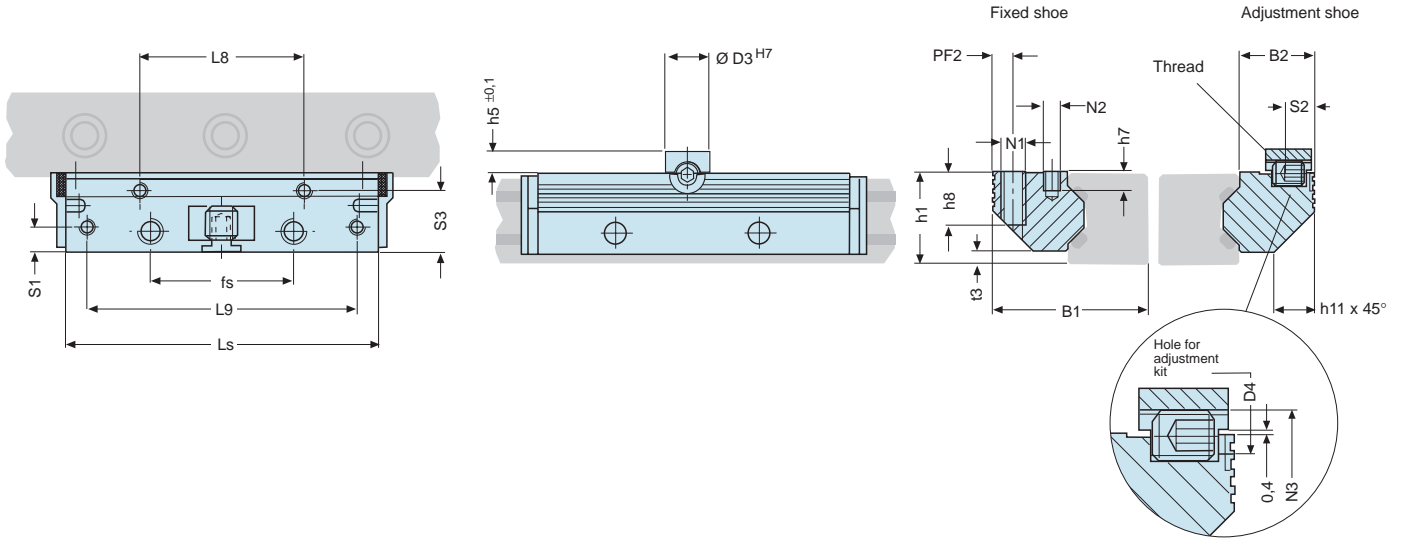

Moment load rating RSP				Dimensions				other dimensions RSP											Weight	Order number				
Mocx	Mcy	Mocz	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	RSP
0,20(B+30,3)	0,20(B+30,3)	6	5	64	24,4	15,0	4	3,4	25	11,9	8	3	6,0	8	29	57	M4	M3	M4	3,4	4,9	9,7	0,06	84495T
0,35(B+36,5)	0,30(B+36,5)	12	10	78	30,9	19,0	5	4,4	30	15,2	10	4	7,5	10	34	68	M5	M4	M6	4,9	5,9	12,4	0,20	84395T
0,40(B+47,0)	0,33(B+47,0)	17	14	92	40,9	23,0	5	4,9	40	20,4	10	4	8,0	12	42	80	M6	M5	M6	5,9	5,9	16,9	0,30	84442T
0,80(B+58,4)	0,60(B+58,4)	35	25	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367T
1,20(B+85,0)	0,90(B+85,0)	76	58	135	68,9	37,5	7	8,9	62	32,9	14	6	7,5	20	67	117	M10	M6	M8	8,9	8,9	28,4	1,40	84368T
2,70(B+109,0)	2,20(B+109,0)	21	17	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	84369T

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]


Standard	Basic body	Rollers	Wipers
	anodized Aluminium AlMg Si0,5 F28	Bearing steel 100 Cr6	Plastic plate PA6 with felt wipers

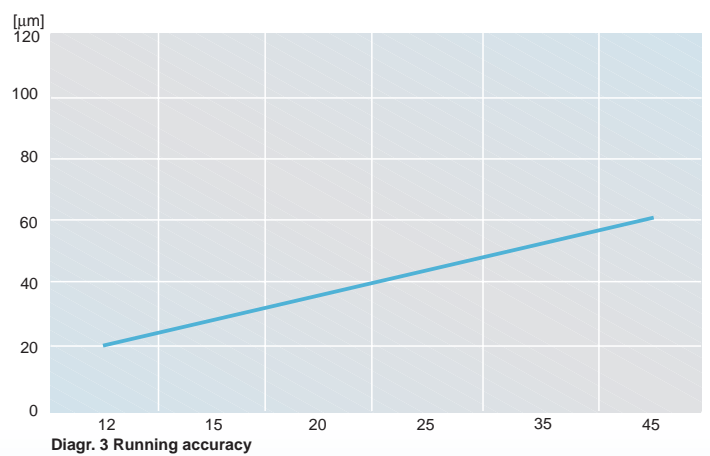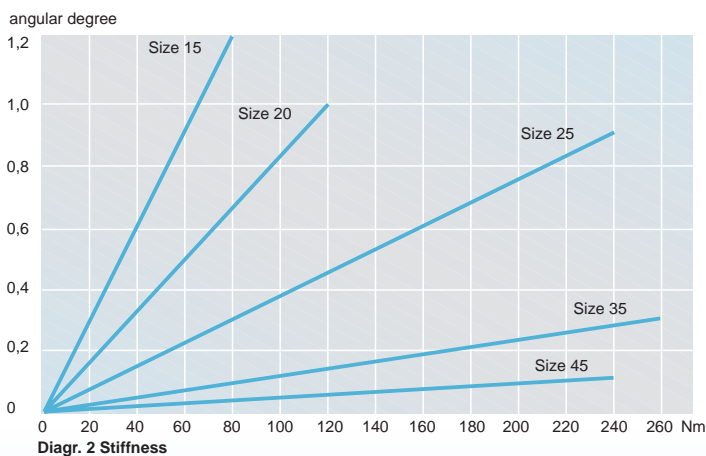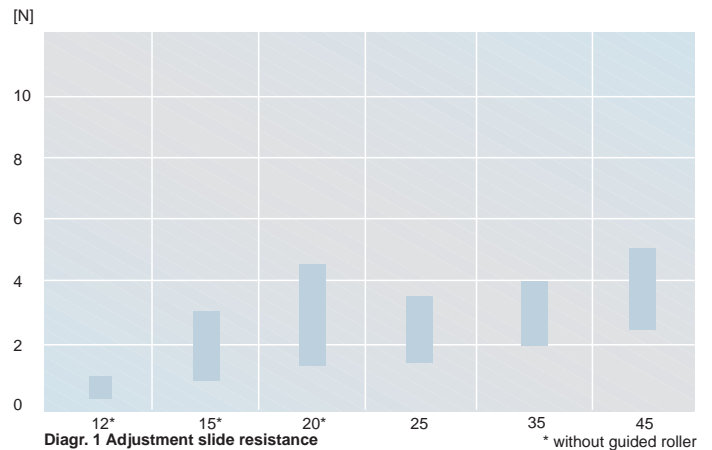




# Aluminium cassette

## Elastic roller

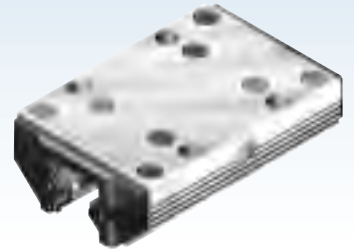

Series FDF

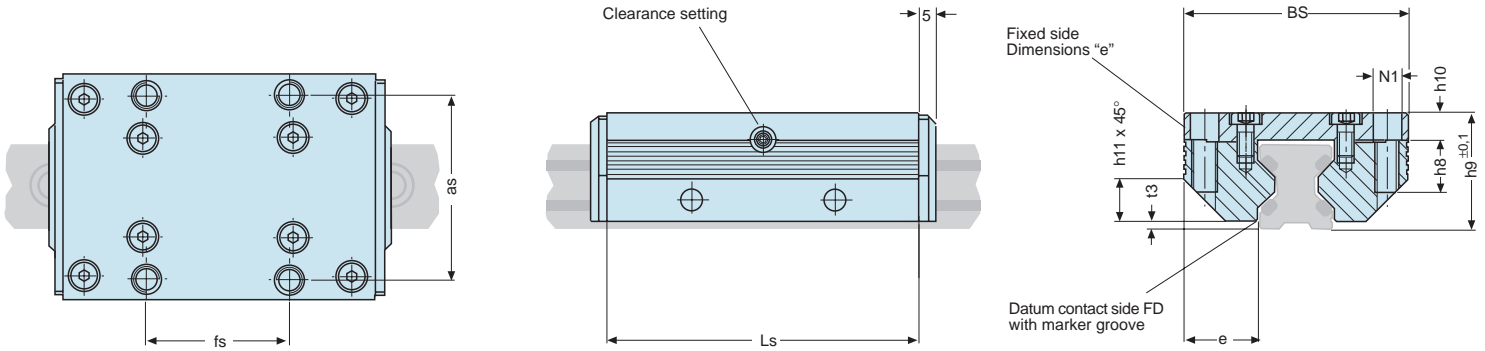

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Cassette	Order number Cassette	
	C	Co	Mocx	Mcx	Mocy/Mocx	Mcy/Mcx	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
25	1200	1200	19	19	26	26	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363E
45	3500	3500	112	112	133	133	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365E

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

### Technical information cassettes and roller shoes (RSP)

#### Consists of:

- Aluminium body
- 8 rollers in needle bearings embedded in elastomer
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

#### Features:

- Maximum load capacity, smooth and silent running
- 45° - position of the rollers for loads from all directions
- Clip-on wipers with felt seal (metal wipers optional)
- Adjustable preload
- With special damping qualities
- Endless stroke lengths by coupling of rails (see page 64)
- Calculation programm to find the best suitable guide size  
Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

#### Traverse speed:

- Traverse speed up to 5 m/s
- Acceleration up to 20 m/s<sup>2</sup>

#### Temperature range:

- - 20° up to +100°C, short time operation +120°C

#### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

#### Fastening:

- With screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

#### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

#### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.


#### Stiffness:

- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

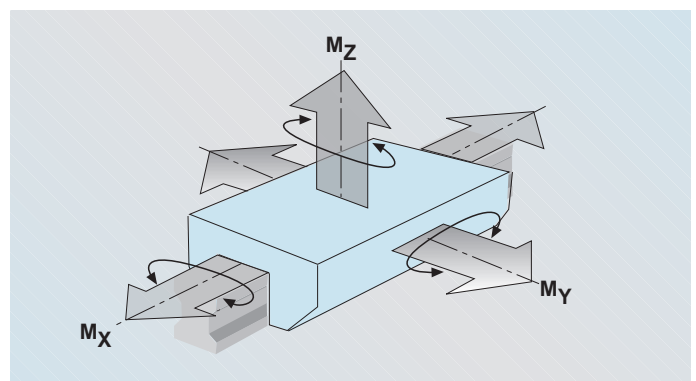


# Aluminium roller shoes

## Elastic roller

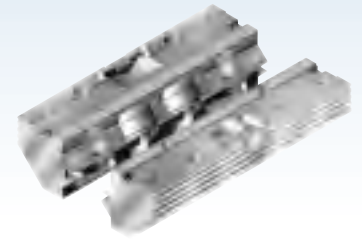




### Series FEF

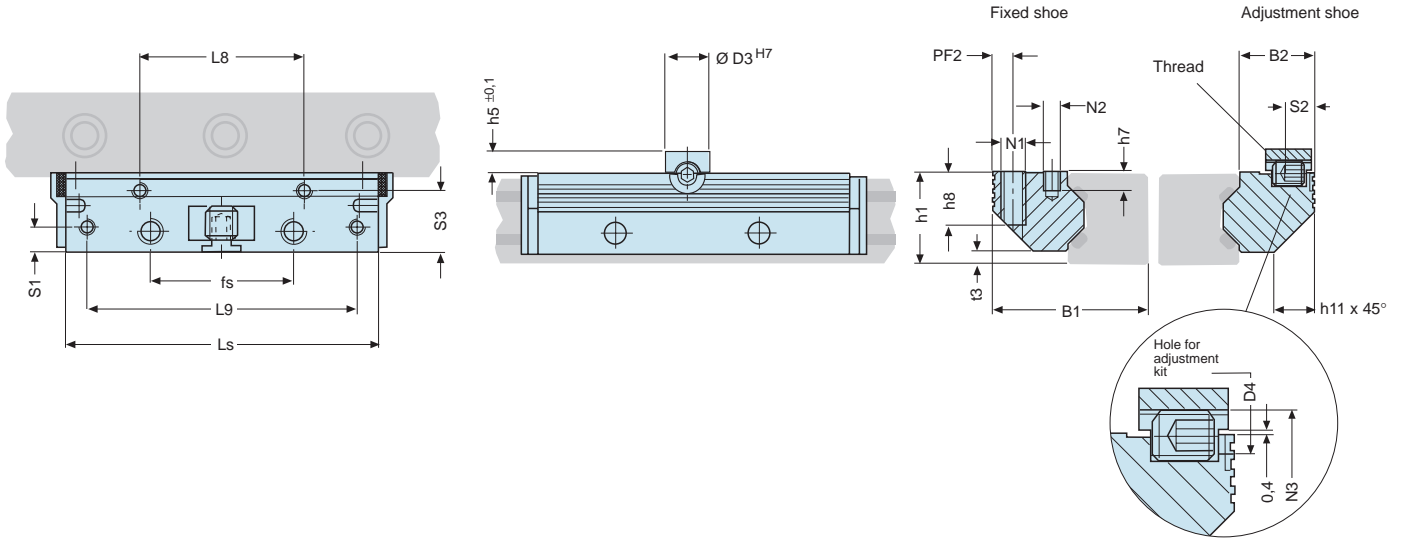

Moment load rating RSP				Dimensions				other dimensions RSP											Weight	Order number RSP				
Mocx	Mcx	Mocy/Mocz	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	
0,6(B+58,4)	0,6(B+58,4)	26	26	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367E
1,7(B+109,0)	1,7(B+109,0)	133	133	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	84369E

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]


	Basic body	Rollers	Wipers
Standard	anodized Aluminium AlMg Si0,5 F28	Bearing steel 100 Cr6	Plastic plate PA6 with felt wipers
Material			

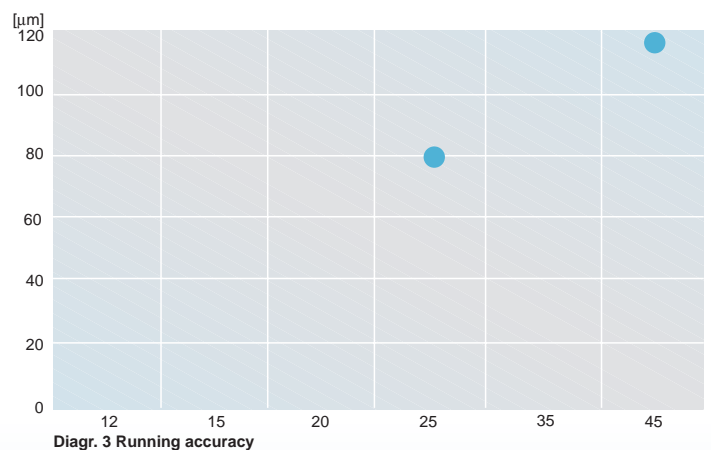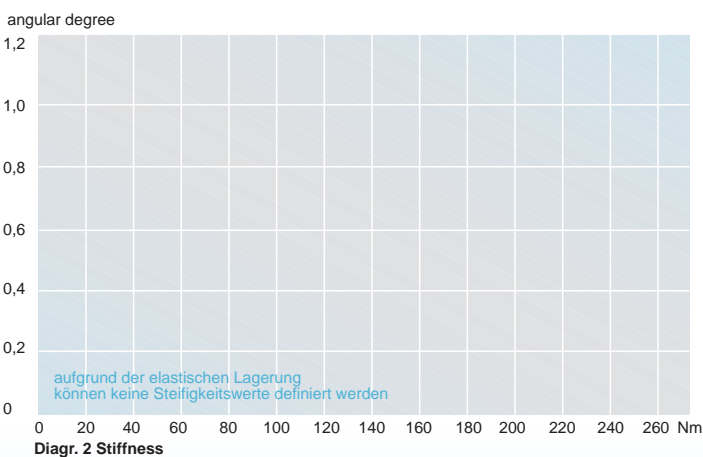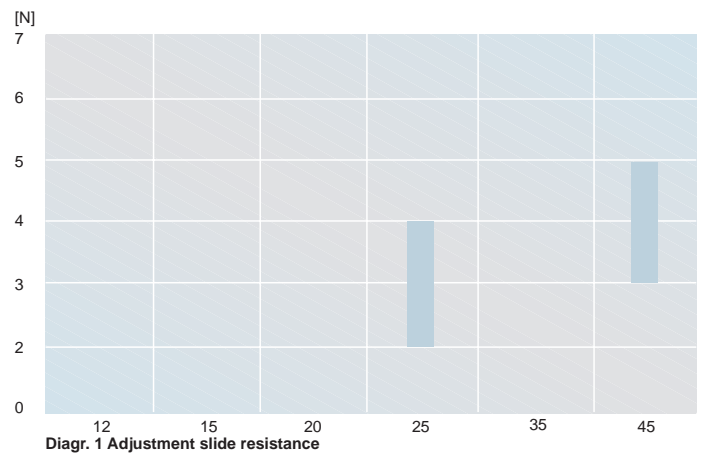




# Aluminium cassette

Non-corrosive Low Cost

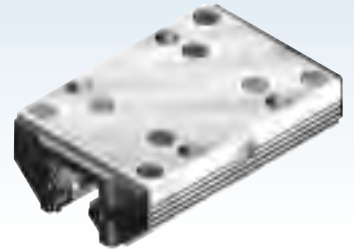

## Series FDG

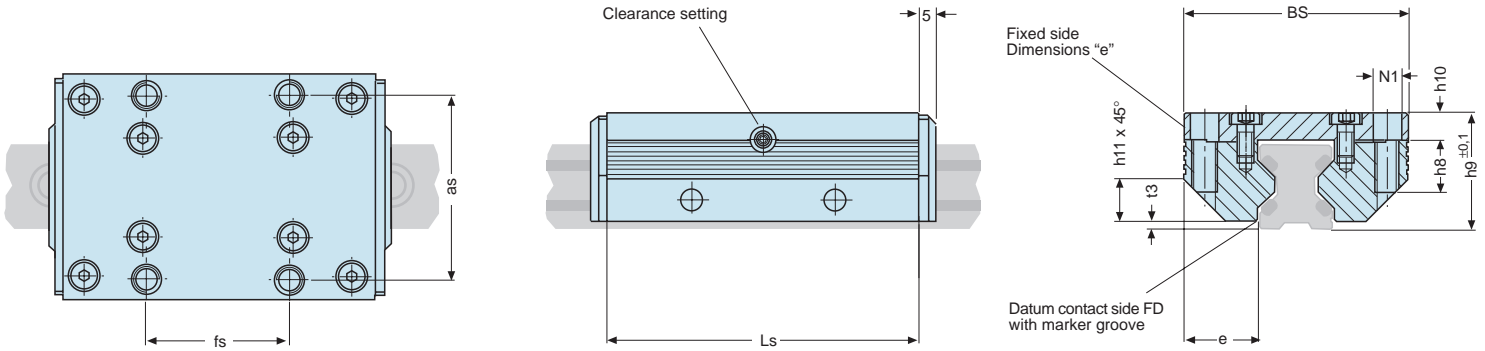

Size	Load rating		Moment load rating				Dimensions			other dimensions cassette							Weight Cassette	Order number Cassette	
	C	Co	Mocx	Mcx	Mocy/Mocx	Mcy/Mcx	Ls	Bs	h9	as	fs	e	h8	h10	h11	t3			N1
12	620	170	1,6	5,7	2,4	8,9	64	37	19	30	25	12,50	8	4,0	6	1,4	M4	0,1	84494LN
15	700	230	2,5	7,5	4,0	12,0	78	47	24	38	30	15,75	10	5,0	8	2,0	M5	0,3	84396LN
20	940	300	4,0	13,0	6,0	19,0	92	63	30	53	40	21,00	12	7,0	11	2,0	M6	0,4	84441LN
25	1500	700	11,0	23,0	15,0	32,0	98	70	36	57	45	23,50	16	8,5	13	2,5	M8	0,6	84363LN
35	3100	1400	32,0	72,0	42,0	95,0	135	100	48	82	62	34,00	20	10,5	20	3,5	M10	1,5	84364LN
45	6300	2700	86,0	200,0	103,0	238,0	165	120	60	100	80	37,50	24	13,5	22	4,0	M12	2,9	84365LN

Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

## Technical information cassettes and roller shoes (RSP)

### Consists of:

- Aluminium body
- 8 rollers in ball bearings
- Plastic plate on both front sides with felt seal (metal wipers optional, see page 60)

### Features:

- Medium load capacity, smooth and silent running
- 45° - position of the rollers for loads from all directions
- Clip-on wipers with felt seal (metal wipers optional)
- Adjustable preload
- Endless stroke lengths by coupling of rails (see page 64)
- Calculation programm to find the best suitable guide size  
Our calculation programm can be found in the download area of our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com). We are gladly prepared to calculate the guide size for you.

### Traverse speed:

- Traverse speed up to 10 m/s
- Acceleration up to 40 m/s<sup>2</sup>

### Temperature range:

- 20° up to +100°C, short time operation +120°C

### Lubrication:

- Maintenance-free due to lifetime-lubrication with grease Shell Retinax LX2

### Fastening:

- With screws quality 8.8, tightening moments see Technical informations (page 64)
- Cassette with 4 fastening screws
- Pair of roller shoes with 12 fastening screws

### Adjustment/Preload:


- Easy adjustment by threaded pin on the adjusting side of the cassette. Adjustment of pair of roller shoes by included adjustment plate and threaded pin. Recommended slide resistance see diagr. 1.
- The adjustment should always be done without wipers.

### Running accuracy:

- The running accuracy in diagr. 3 refers to a rail length of one meter.

### Stiffness:

- With pairs of single rails the stiffness refers to one pair of single rails with one pair of roller shoes (see diagr. 2).

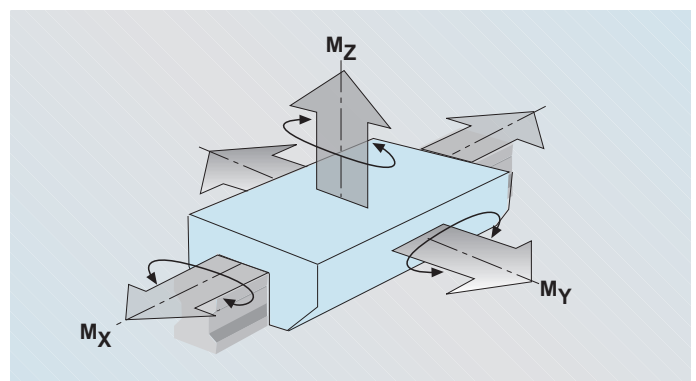


# Aluminium roller shoes

## Non-corrosive Low Cost



### Series FEG

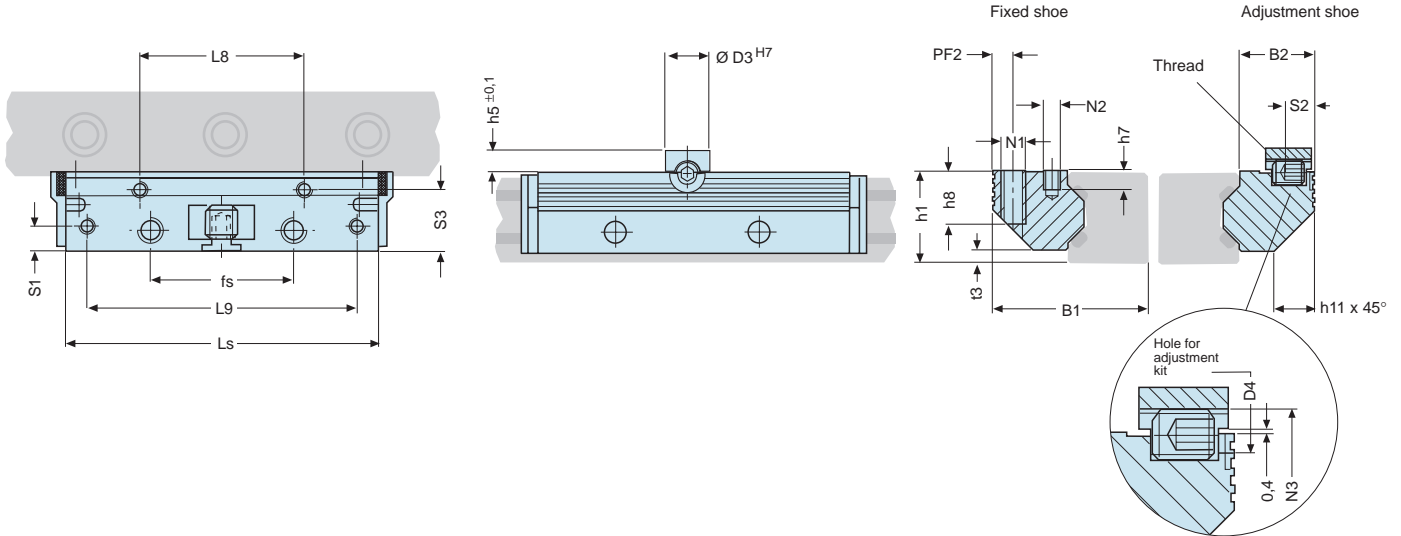


Moment load rating RSP				Dimensions				other dimensions RSP												Weight		Order number RSP		
Mocx	Mcy	Mocx/Mcy	Mcy/Mcz	Ls	B1	h1	h5	PF2	fs	B2	D3	D4	h7	h8	L8	L9	N1	N2	N3	S1	S2	S3	RSP	
0,08(B+30,3)	0,30(B+30,3)	2,4	8,9	64	24,4	15,0	4	3,4	25	11,9	8	3	6,0	8	29	57	M4	M3	M4	3,4	4,9	9,7	0,06	84495LN
0,10(B+36,5)	0,35(B+36,5)	4,0	12,0	78	30,9	19,0	5	4,4	30	15,2	10	4	7,5	10	34	68	M5	M4	M6	4,9	5,9	12,4	0,20	84395LN
0,15(B+47,0)	0,50(B+47,0)	6,0	19,0	92	40,9	23,0	5	4,9	40	20,4	10	4	8,0	12	42	80	M6	M5	M6	5,9	5,9	16,9	0,30	84442LN
0,35(B+58,4)	0,70(B+58,4)	15,0	32,0	98	48,4	27,5	7	6,4	45	22,9	14	6	5,0	16	48	84	M8	M5	M8	7,4	8,9	19,4	0,50	84367LN
0,70(B+85,0)	1,50(B+85,0)	42,0	95,0	135	68,9	37,5	7	8,9	62	32,9	14	6	7,5	20	67	117	M10	M6	M8	8,9	8,9	28,4	1,40	84368LN
1,40(B+109,0)	3,10(B+109,0)	103,0	238,0	165	82,4	46,5	7	9,9	80	36,4	14	6	9,5	24	83	146	M12	M8	M8	9,9	8,9	30,9	2,80	84369LN


Dimensions [mm], Load rating, Moments [Nm], Weight [kg]

	Basic body	Rollers	Wipers
Standard	anodized Aluminium AlMg Si0,5 F28	Non-corrosive steel X65 Cr13	Plastic plate PA6 with felt wipers


Material

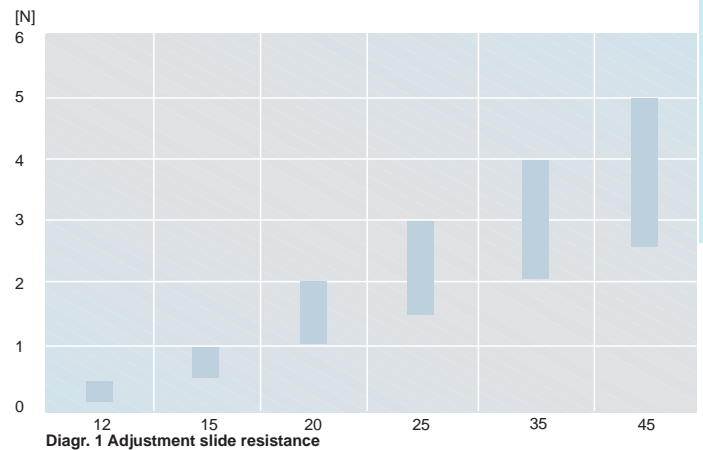

Diagr. 1 Adjustment slide resistance

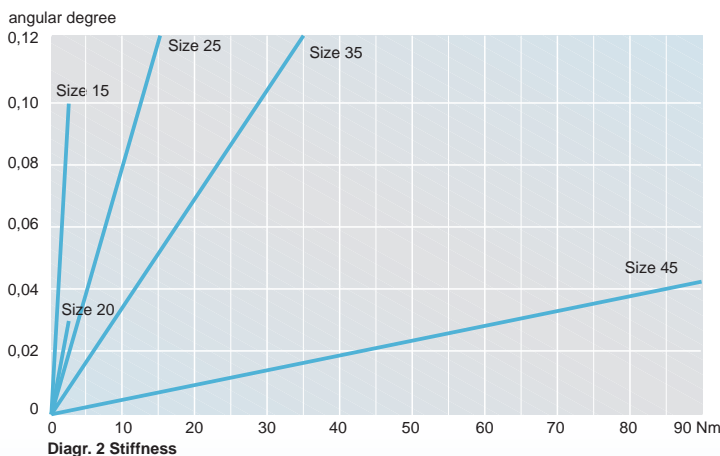

Diagr. 2 Stiffness

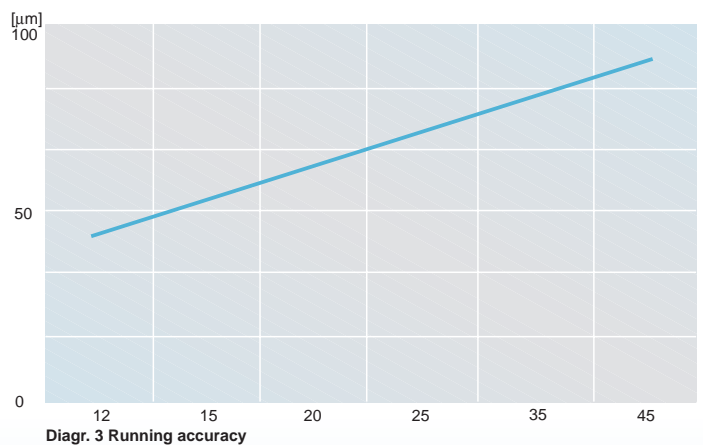

Diagr. 3 Running accuracy



# Aluminium cassette / roller shoes

## Special version

### Special types

#### the high loading



Size	Order number	
	Cassette	Roller shoes
12	on request	on request
15		
20		
25		
35		
45		

Dimensions [mm]


Aluminium roller guides are very variable. Depending on the case of application we supply e.g.:

- Cassettes with overlength for higher loads
- Cassettes for fastening from below

Please consult us.

### Clamping device

#### the manual fixable

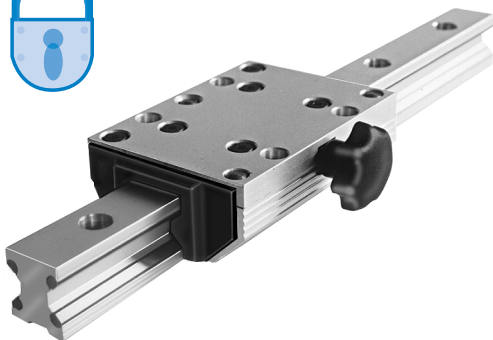


Size	Lock force	Ø a	b	h	Order number	
					Star grip	Lever clamp
15	200	25	41	19,0	84396AK	84396AH
20	250	25	49	23,0	84441AK	84441AH
25	250	32	56	28,0	84363AK	84363AH
35	350	50	83	38,5	84364AK	84364AH
45	750	63	101	48,0	84365AK	84365AH

Dimensions [mm], Force [N] with normal manual power at the moment only the standard version is available


The cassette with star grip can be fixed at any optional place along the guide path. The clamping device does not exert forces on the guide system.

The clamping device is used in fixtures which are movable manually, clamping and stop ledgers, feeding of tools and workpieces. Also available with clamping lever. Please consult us.

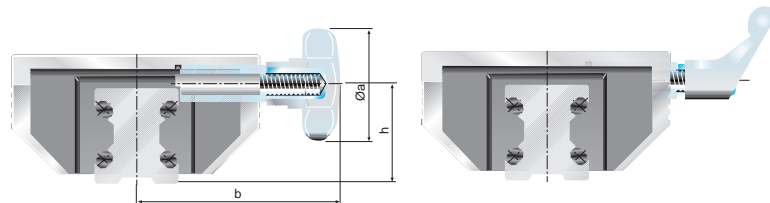

### Clamping device

#### the pneumatic fixable

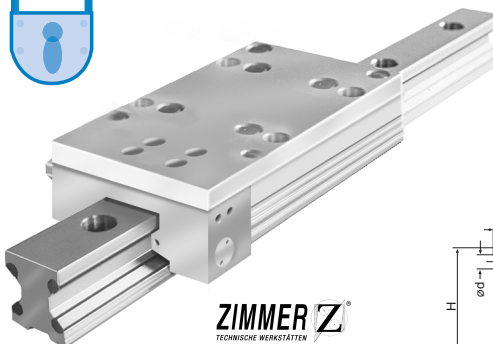


Size	Lock force		L <sub>MK</sub>	L <sub>MKS</sub>	B	H	c	d	e	Order number
	MK	MKS								
15	650	400	51	58,0	55	20,8	3,2	8	5	on request
20	1000	600	42	61,0	63	27,0	3,0	8	5	
25	1000	600	42	61,0	70	32,0	4,0	8	5	
35	1000	600	36	56,2	79	39,5	8,5	8	5	
45	1000	600	36	56,2	88	47,0	13,0	8	5	

Dimensions [mm], Force [N]

MK: pneumatic  
MKS: pneumatic with spring star


The MK is the classic clamping-element in the range of pneumatic clamping elements. The patented wedge driving gear realizes high supporting forces. The pressure medium moves the wedge driving gear in longitudinal direction; by the resulting transverse movement the contact sections are pressing with high forces against the free surfaces of the section rail guide.

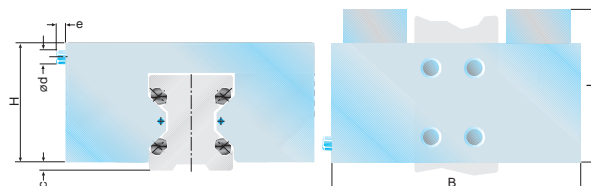

#### Application samples:


- Table traverses and carriages
- Fixing of vertical axes
- Positioning of lifting devices
- Clamping of machines tables

**Central lubrication**  
*the re-lubricatable*

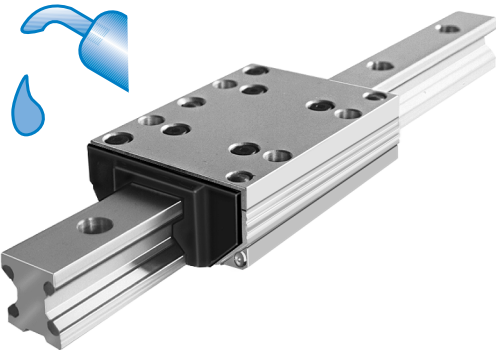

Size	b	h	Lubricating nipple DIN3405	Order number
15	42,0	4,4	D1AØ3,5	84396AF
20	56,3	5,2	D1AØ4,0	84441AF
25	61,8	6,6	D1AØ4,0	84363AF
35	87,9	9,4	D1AØ6,0	84364AF
45	106,0	11,0	D1AØ6,0	84365AF


Dimensions [mm]



For long running periods and especially long life we recommend to use cassettes and roller shoes with relubrication facility. Relubrication in mounted condition becomes easy by the lubricating nipples on the front side.

**High temperature**  
*the hot one*

50 100 150 200

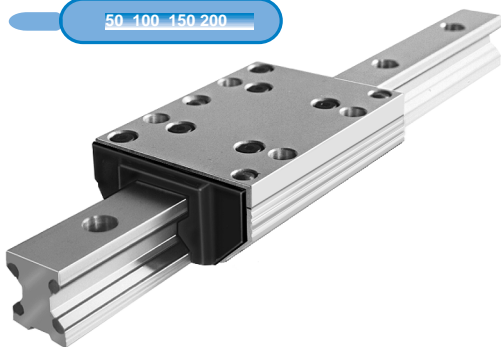


Size	Order number	
	Cassette	Roller shoes
12	on request	on request
15		
20		
25		
35		
45		

For applications in high temperature environment.

The cassette can be used with temperatures up to 200° C.

Please consult us.

**Vacuum**  
*the vacuum-able*

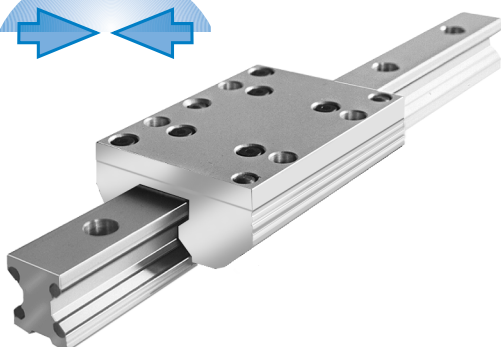

Size	Order number	
	Cassette	Roller shoes
12	on request	on request
15		
20		
25		
35		
45		


For applications in vacuum fields.

Special bore shapes and grease for high vacuum.



Please consult us.



# Aluminium double rail Standard

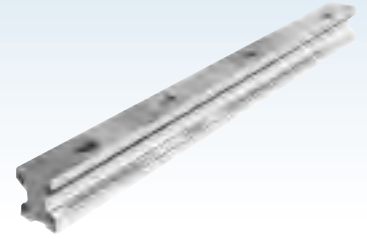

## Series FDA

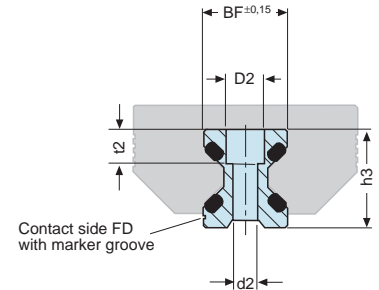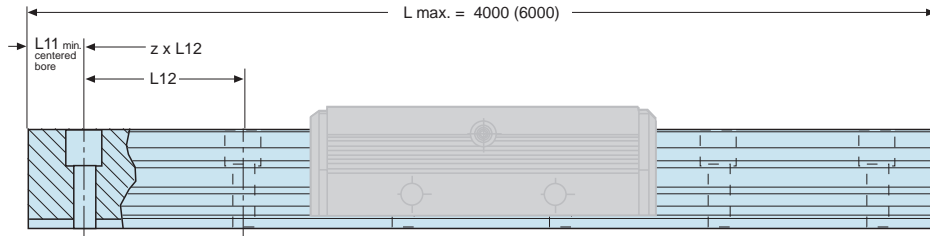

### Dimensions

Sizes	BF	D2	d2	h3	L11* = min	L12	t2	Weight
12	12,00	6	3,4	14,7	10	40	5,5	0,4
15	15,50	8	4,5	18,7	10	60	6,0	0,8
20	21,00	10	5,5	22,6	10	60	7,0	0,9
25	23,00	11	6,6	27,0	10	60	10,0	1,8
35	32,00	15	9,0	37,0	12	80	11,5	3,2
45	45,00	18	11,0	46,0	16	105	14,5	5,5

Dimensions [mm], Weight [kg/m]

## Technical information double rail

### Consists of:

- Aluminium body
- 4 raceways made of high alloy spring steel
- plastic covers for bore holes

### Features:

- fastening screw holes centered due to rail length
- other bore shapes on request. Please consult us.

### Length:

- in one piece for all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

### Fastening:

- with screws quality 8.8 and washers DIN433


Length L [mm]	Order number					
	Double rail for cassettes					
	Gr. 12	15	20	25	35	45
200	64912A	63167A	69062A	62554A		
300	64914A	63169A	69064A	62556A	62587A	62622A
400	64916A	63171A	69066A	62558A	62589A	62624A
500	64918A	63173A	69068A	62560A	62591A	62626A
600	64920A	63175A	69070A	62562A	62593A	62628A
700	64922A	63177A	69072A	62564A	62595A	62630A
800	64924A	63179A	69074A	62566A	62597A	62632A
900	64926A	63181A	69076A	62568A	62599A	62634A
1000	64928A	63183A	69078A	62570A	62601A	62636A
1100	64929A	63184A	69079A	62571A	62602A	62637A
1200	64930A	63185A	69080A	62572A	62603A	62638A
1300	64931A	63186A	69081A	62573A	62604A	62639A
1400	64932A	63187A	69082A	62574A	62605A	62640A
1500	64933A	63188A	69083A	62575A	62606A	62641A
1600	64934A	63189A	69084A	62576A	62607A	62642A
1700	64935A	63190A	69085A	62577A	62608A	62643A
1800	64936A	63191A	69086A	62578A	62609A	62644A
1900	64937A	63192A	69087A	62579A	62610A	62645A
2000	64938A	63193A	69088A	62580A	62611A	62646A
2100	64939A	63194A	69089A	62581A	62612A	62647A
2200	64940A	63195A	69090A	62582A	62613A	62648A
2300	64941A	63196A	69091A	62583A	62614A	62649A
2400	64942A	63197A	69092A	62584A	62615A	62650A
2500	64943A	63198A	69093A	62585A	62616A	62651A
2600	64944A	69052A	69094A	63132A	62617A	62652A
2700	64945A	69053A	69095A	63133A	62618A	62653A
2800	64946A	69054A	69096A	63134A	62619A	62654A
2900	64947A	69055A	69097A	63135A	62620A	62655A
3000	64948A	69056A	69098A	63136A	62621A	62656A
3200	64949A	69057A	69099A	63137A	63142A	62657A
3400	64950A	69058A	69100A	63138A	63143A	62658A
3600	64951A	69059A	69101A	63139A	63144A	62659A
3800	64952A	69060A	69102A	63140A	63145A	62660A
4000	64953A	69061A	69103A	63141A	63146A	62661A
4200				69138A	69148A	
4400				69139A	69149A	
4600				69140A	69150A	
4800				69141A	69151A	
5000				69142A	69152A	
5200				69143A	69153A	
5400				69144A	69154A	
5600				69145A	69155A	
5800				69146A	69156A	
6000				69147A	69157A	

	Rail body	Raceways	Fastening bores
Standard	high density anodised aluminium	high alloy spring steel	centered due to rail length


Material

# Pair of Aluminium single rails

## Standard

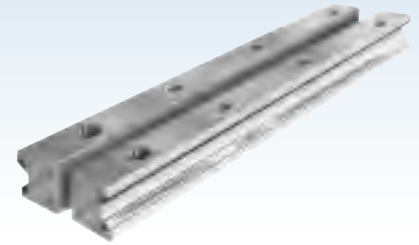

### Series FEA

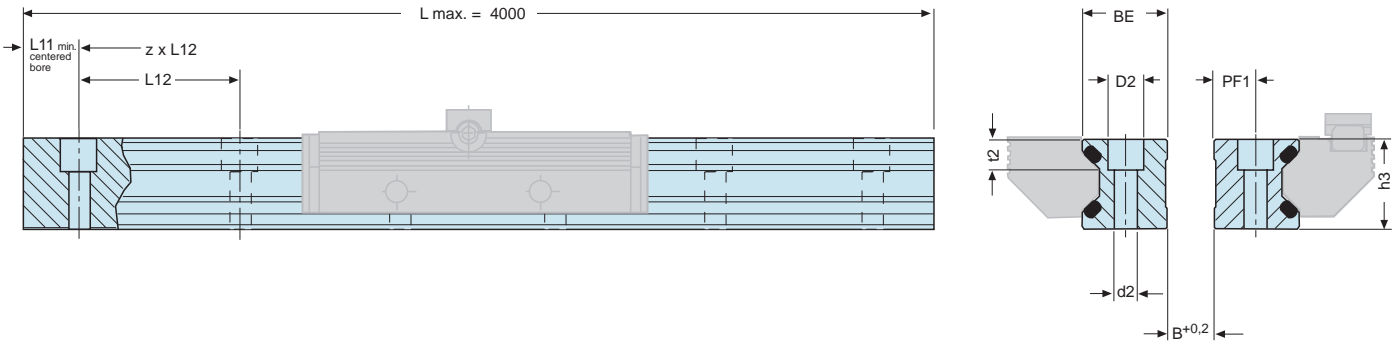

Size	BE	D2	d2	h3	L11	L12	PF1	t2	Weight [Pair of rails]
12	12,00	6	3,4	14,7	10	40	5,5	5,5	0,8
15	15,25	8	4,5	18,7	10	60	7,0	6,0	1,6
20	20,00	10	5,5	22,6	10	60	9,5	7,0	2,0
25	25,00	11	6,6	27,0	10	60	12,0	10,0	3,8
35	35,00	15	9,0	37,0	12	80	17,0	11,5	7,0
45	45,00	18	11,0	46,0	16	105	22,0	14,5	11,2

Dimensions [mm], Weight [kg/m]

### Technical information

#### pair of single rail

#### Consists of:

- Aluminium body
- 4 raceways made of high alloy spring steel
- plastic covers for bore holes

#### Features:

- free selection of guide width
- the roller shoes can be placed in between or outside the rail pair

#### Length:

- in one piece for all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

#### Fastening:

- with screws quality 8.8 and washers DIN433

Lenght L [mm]	Order number					
	Pair of rails Gr. 12	15	20	25	35	45
200	64954A	63199A	69010A	62701A		
300	64956A	63201A	69012A	62703A	62734A	62769A
400	64958A	63203A	69014A	62705A	62736A	62771A
500	64960A	63205A	69016A	62707A	62738A	62773A
600	64962A	63207A	69018A	62709A	62740A	62775A
700	64964A	63209A	69020A	62711A	62742A	62777A
800	64966A	63211A	69022A	62713A	62744A	62779A
900	64968A	63213A	69024A	62715A	62746A	62781A
1000	64970A	63215A	69026A	62717A	62748A	62783A
1100	64971A	63216A	69027A	62718A	62749A	62784A
1200	64972A	63217A	69028A	62719A	62750A	62785A
1300	64973A	63218A	69029A	62720A	62751A	62786A
1400	64974A	63219A	69030A	62721A	62752A	62787A
1500	64975A	63220A	69031A	62722A	62753A	62788A
1600	64976A	63221A	69032A	62723A	62754A	62789A
1700	64977A	63222A	69033A	62724A	62755A	62790A
1800	64978A	63223A	69034A	62725A	62756A	62791A
1900	64979A	63224A	69035A	62726A	62757A	62792A
2000	64980A	63225A	69036A	62727A	62758A	62793A
2100	64981A	63226A	69037A	62728A	62759A	62794A
2200	64982A	63227A	69038A	62729A	62760A	62795A
2300	64983A	63228A	69039A	62730A	62761A	62796A
2400	64984A	63229A	69040A	62731A	62762A	62797A
2500	64985A	63230A	69041A	62732A	62763A	62798A
2600	64986A	69000A	69042A	63147A	62764A	62799A
2700	64987A	69001A	69043A	63148A	62765A	62800A
2800	64988A	69002A	69044A	63149A	62766A	62801A
2900	64989A	69003A	69045A	63150A	62767A	62802A
3000	64990A	69004A	69046A	63151A	62768A	62803A
3200	64991A	69005A	69047A	63152A	63157A	62804A
3400	64992A	69006A	69048A	63153A	63158A	62805A
3600	64993A	69007A	69049A	63154A	63159A	62659A
3800	64994A	69008A	69050A	63155A	63160A	62807A
4000	64995A	69009A	69051A	63156A	63161A	62808A


	Rail body	Raceways	Fastening bores
Standard	high density anodised aluminium	high alloy spring steel	centered due to rail length

Material





# Aluminium double rail

Non-corrosive

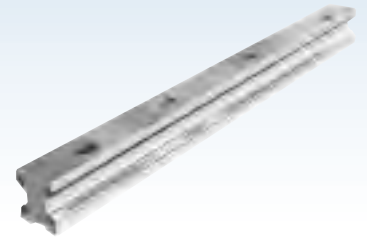

## Series FDC

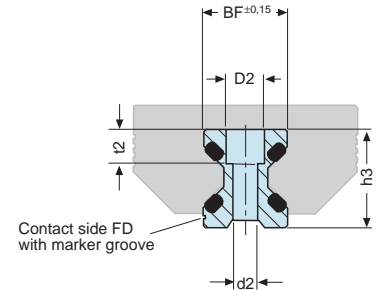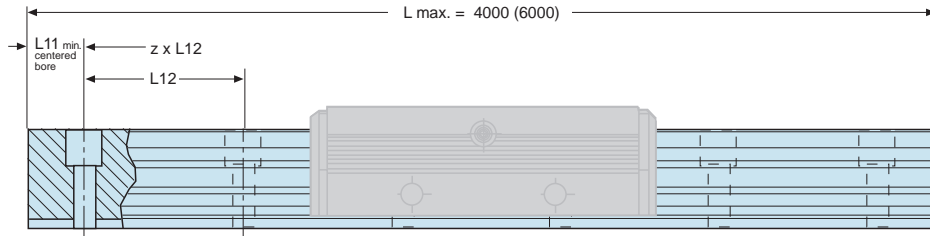

### Dimensions

Sizes	BF	D2	d2	h3	L11* = min	L12	t2	Weight
12	12,00	6	3,4	14,7	10	40	5,5	0,4
15	15,50	8	4,5	18,7	10	60	6,0	0,8
20	21,00	10	5,5	22,6	10	60	7,0	0,9
25	23,00	11	6,6	27,0	10	60	10,0	1,8
35	32,00	15	9,0	37,0	12	80	11,5	3,2
45	45,00	18	11,0	46,0	16	105	14,5	5,5

Dimensions [mm], Weight [kg/m]

## Technical information

### double rail

#### Consists of:

- Aluminium body
- 4 raceways made of non corrosive steel
- plastic covers for bore holes

#### Features:

- fastening screw holes centered due to rail length
- other bore shapes on request. Please consult us.

#### Length:

- in one piece at all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

#### Fastening:

- with screws quality 8.8 and washers DIN433


Length L [mm]	Order number						
	Double rail for cassettes	12	15	20	25	35	45
200	on request	63167N	69062N	62554N			
300		63169N	69064N	62556N	62587N	62622N	
400		63171N	69066N	62558N	62589N	62624N	
500		63173N	69068N	62560N	62591N	62626N	
600		63175N	69070N	62562N	62593N	62628N	
700		63177N	69072N	62564N	62595N	62630N	
800		63179N	69074N	62566N	62597N	62632N	
900		63181N	69076N	62568N	62599N	62634N	
1000		63183N	69078N	62570N	62601N	62636N	
1100		63184N	69079N	62571N	62602N	62637N	
1200		63185N	69080N	62572N	62603N	62638N	
1300		63186N	69081N	62573N	62604N	62639N	
1400		63187N	69082N	62574N	62605N	62640N	
1500		63188N	69083N	62575N	62606N	62641N	
1600		63189N	69084N	62576N	62607N	62642N	
1700		63190N	69085N	62577N	62608N	62643N	
1800		63191N	69086N	62578N	62609N	62644N	
1900		63192N	69087N	62579N	62610N	62645N	
2000		63193N	69088N	62580N	62611N	62646N	
2100		63194N	69089N	62581N	62612N	62647N	
2200		63195N	69090N	62582N	62613N	62648N	
2300		63196N	69091N	62583N	62614N	62649N	
2400		63197N	69092N	62584N	62615N	62650N	
2500		63198N	69093N	62585N	62616N	62651N	
2600		69052N	69094N	63132N	62617N	62652N	
2700		69053N	69095N	63133N	62618N	62653N	
2800		69054N	69096N	63134N	62619N	62654N	
2900		69055N	69097N	63135N	62620N	62655N	
3000			69098N	63136N	62621N	62656N	
3200			69099N	63137N	63142N	62657N	
3400			69100N	63138N	63143N	62658N	
3600			69101N	63139N	63144N	62659N	
3800			69102N	63140N	63145N	62660N	
4000			69103N	63141N	63146N	62661N	

	Rail body	Raceways	Fastening bores
Standard	high density anodised aluminium	non corrosive steel X65 Cr13	centered due to rail length



### Material

# Pair of Aluminium single rails

## Non-corrosive

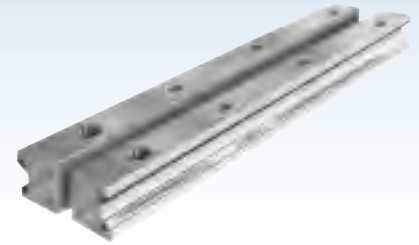

### Series FEC

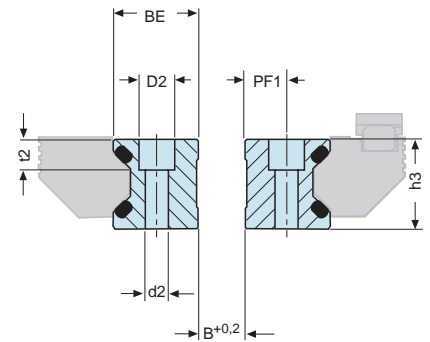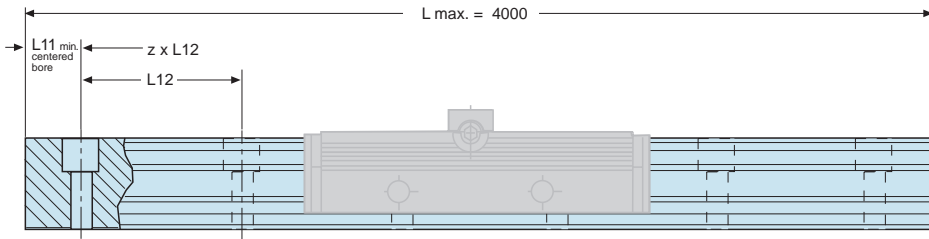

Maßtabelle

Size	BE	D2	d2	h3	L11	L12	PF1	t2	Weight [Pair of rails]
12	12,00	6	3,4	14,7	10	40	5,5	5,5	0,8
15	15,25	8	4,5	18,7	10	60	7,0	6,0	1,6
20	20,00	10	5,5	22,6	10	60	9,5	7,0	2,0
25	25,00	11	6,6	27,0	10	60	12,0	10,0	3,8
35	35,00	15	9,0	37,0	12	80	17,0	11,5	7,0
45	45,00	18	11,0	46,0	16	105	22,0	14,5	11,2

Dimensions [mm], Weight [kg/m]

### Technical information

#### pair of single rail

#### Consists of:

- Aluminium body
- 4 raceways made of non corrosive steel
- plastic covers for bore holes

#### Features:

- free selection of guide width
- the roller shoes can be placed in between or outside the rail pair

#### Length:

- in one piece at all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

#### Fastening:

- with screws quality 8.8 and washers DIN433

Length L [mm]	Order number					
	Pair of rails Gr. 12	15	20	25	35	45
200	on request	63199N	69010N	62701N		
300		63201N	69012N	62703N	62734N	62769N
400		63203N	69014N	62705N	62736N	62771N
500		63205N	69016N	62707N	62738N	62773N
600		63207N	69018N	62709N	62740N	62775N
700		63209N	69020N	62711N	62742N	62777N
800		63211N	69022N	62713N	62744N	62779N
900		63213N	69024N	62715N	62746N	62781N
1000		63215N	69026N	62717N	62748N	62783N
1100		63216N	69027N	62718N	62749N	62784N
1200		63217N	69028N	62719N	62750N	62785N
1300		63218N	69029N	62720N	62751N	62786N
1400		63219N	69030N	62721N	62752N	62787N
1500		63220N	69031N	62722N	62753N	62788N
1600		63221N	69032N	62723N	62754N	62789N
1700		63222N	69033N	62724N	62755N	62790N
1800		63223N	69034N	62725N	62756N	62791N
1900		63224N	69035N	62726N	62757N	62792N
2000		63225N	69036N	62727N	62758N	62793N
2100		63226N	69037N	62728N	62759N	62794N
2200		63227N	69038N	62729N	62760N	62795N
2300		63228N	69039N	62730N	62761N	62796N
2400		63229N	69040N	62731N	62762N	62797N
2500		63230N	69041N	62732N	62763N	62798N
2600		69000N	69042N	63147N	62764N	62799N
2700		69001N	69043N	63148N	62765N	62800N
2800		69002N	69044N	63149N	62766N	62801N
2900			69045N	63150N	62767N	62802N
3000			69046N	63151N	62768N	62803N
3200			69047N	63152N	63157N	62804N
3400			69048N	63153N	63158N	62805N
3600			69049N	63154N	63159N	62659N
3800			69050N	63155N	63160N	62807N
4000			69051N	63156N	63161N	62808N


	Rail body	Raceways	Fastening bores
Standard	high density anodised aluminium	non corrosive steel X65 Cr13	centered due to rail length

Material





# Aluminium double rail

## Antimagnetic

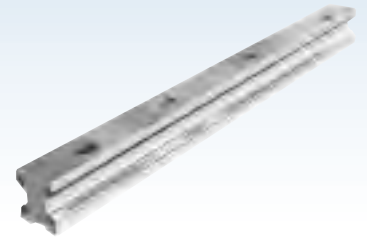

### Series FDD

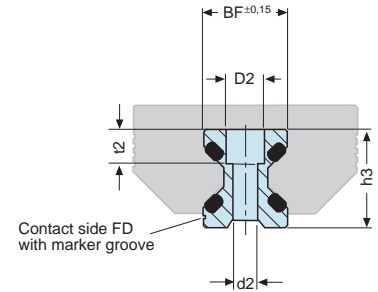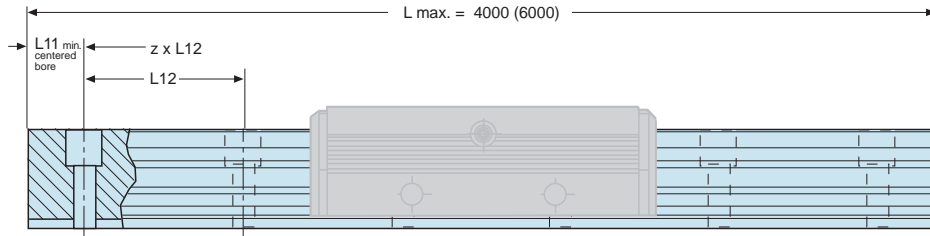

### Dimensions

Sizes	BF	D2	d2	h3	L11* = min	L12	t2	Weight
12	12,00	6	3,4	14,7	10	40	5,5	0,4
15	15,50	8	4,5	18,7	10	60	6,0	0,8
20	21,00	10	5,5	22,6	10	60	7,0	0,9
25	23,00	11	6,6	27,0	10	60	10,0	1,8
35	32,00	15	9,0	37,0	12	80	11,5	3,2
45	45,00	18	11,0	46,0	16	105	14,5	5,5

Dimensions [mm], Weight [kg/m]

### Technical information

#### double rail

#### Consists of:

- Aluminium body
- 4 raceways made of antimagnetic steel
- plastic covers for bore holes

#### Features:

- fastening screw holes centered due to rail length
- other bore shapes on request. Please consult us.

#### Length:

- in one piece for all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

#### Fastening:

- with screws quality 8.8 and washers DIN433


Length L [mm]	Order number						
	Double rail for cassettes	12	15	20	25	35	45
200	on request			62554P		on request	
300				62556P			
400				62558P			
500				62560P			
600				62562P			
700				62564P			
800				62566P			
900				62568P			
1000				62570P			
1100				62571P			
1200				62572P			
1300				62573P			
1400				62574P			
1500				62575P			
1600				62576P			
1700				62577P			
1800				62578P			
1900				62579P			
2000				62580P			
2100				62581P			
2200				62582P			
2300				62583P			
2400				62584P			
2500				62585P			
2600				63132P			
2700				63133P			
2800				63134P			
2900				63135P			
3000				63136P			
3200				63137P			
3400				63138P			
3600				63139P			
3800				63140P			
4000				63141P			

	Rail body	Raceways	Fastening bores
Standard	high density anodised aluminium AlMgSi0,5F28	Duratherm	centered due to rail length


### Material

# Pair of Aluminium single rails

## Antimagnetic

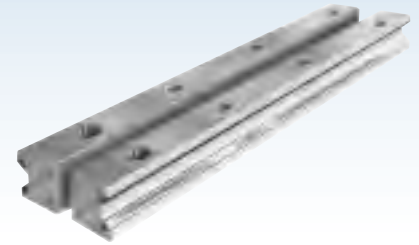

### Series FED

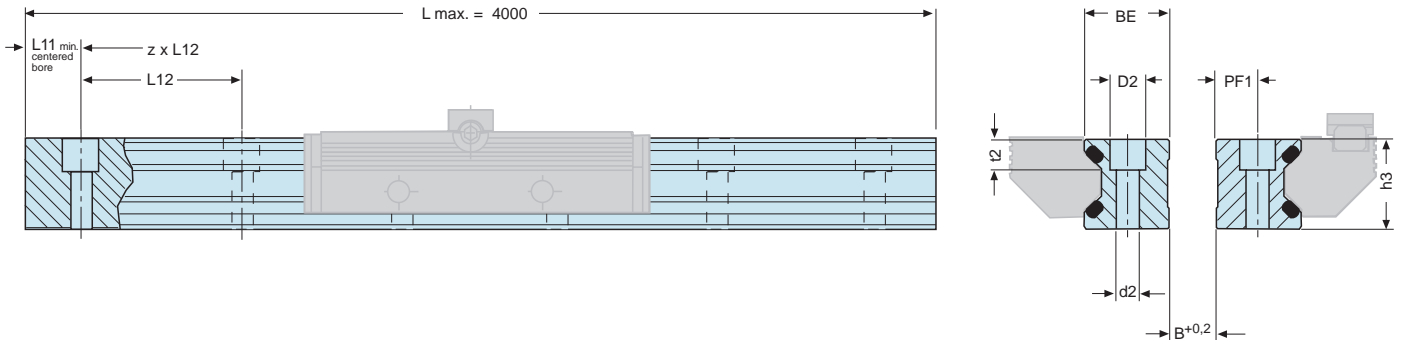

Size	BE	D2	d2	h3	L11	L12	PF1	t2	Weight [Pair of rails]
12	12,00	6	3,4	14,7	10	40	5,5	5,5	0,8
15	15,25	8	4,5	18,7	10	60	7,0	6,0	1,6
20	20,00	10	5,5	22,6	10	60	9,5	7,0	2,0
25	25,00	11	6,6	27,0	10	60	12,0	10,0	3,8
35	35,00	15	9,0	37,0	12	80	17,0	11,5	7,0
45	45,00	18	11,0	46,0	16	105	22,0	14,5	11,2

Dimensions [mm], Weight [kg/m]

### Technical information

#### pair of single rail

#### Consists of:

- Aluminium body
- 4 raceways made of antimagnetic steel
- plastic covers for bore holes

#### Features:

- free selection of guide width
- the roller shoes can be placed in between or outside the rail pair

#### Length:

- in one piece for all catalogue lengths and intermediate lengths
- for endless strokes the rails can be coupled

#### Fastening:


- with screws quality 8.8 and washers DIN433

Length L [mm]	Order number					
	Pair of rails Gr. 12	15	20	25	35	45
200	on request			62701P	on request	
300				62703P		
400				62705P		
500				62707P		
600				62709P		
700				62711P		
800				62713P		
900				62715P		
1000				62717P		
1100				62718P		
1200				62719P		
1300				62720P		
1400				62721P		
1500				62722P		
1600				62723P		
1700				62724P		
1800				62725P		
1900				62726P		
2000				62727P		
2100				62728P		
2200				62729P		
2300				62730P		
2400				62731P		
2500				62732P		
2600				63147P		
2700				63148P		
2800				63149P		
2900				63150P		
3000				63151P		
3200				63152P		
3400				63153P		
3600				63154P		
3800				63155P		
4000				63156P		

Standard	Rail body	Raceways	Fastening bores
	high density anodised aluminium AlMgSi0,5F28	Duratherm	centered due to rail length

Material

### Metal wipers

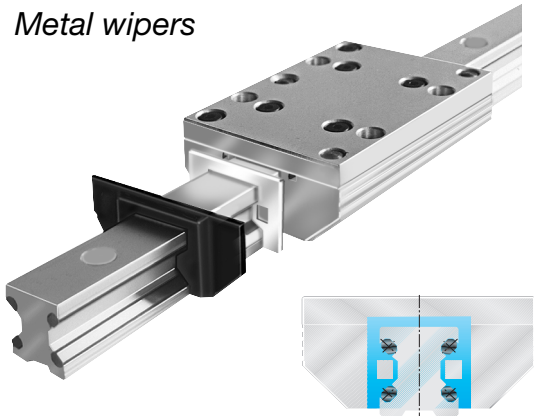


Size	Order number
12	69126A
15	69127A
20	69128A
25	69129A
35	69130A
45	69131A

The metal wipers can be inserted into the plastic cover in addition to the standard felt wiper. They prevent the guide system from rough dirt in welding or wood working applications.

Dimensions [mm]

### Stop screws

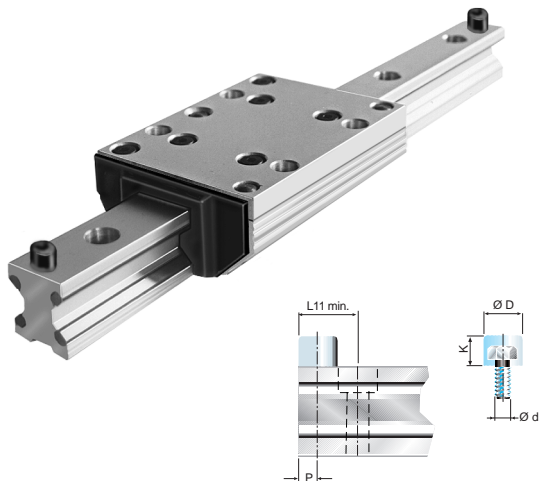


Size	d	D	K	L11 min.	P	Order number
12	M5	12	8	15,0	6,0	63504A
15	M5	12	8	16,0	6,0	63504A
20	M5	12	8	17,0	6,0	63504A
25	M6	15	10	20,5	7,5	63505A
35	M8	19	13	26,5	9,5	63506A
45	M10	24	16	33,0	12,0	63507A

The stop screws are screwed into threads (option) on the guide rails. The stopping energy is reduced by a rubber cap. With guide rails where the initial bore distances are less than L11 min. we offset the bore shape by the amount of half a bore hole spacing.

**Material:** Chloroprene caoutchouc, black

Dimensions [mm]

### Bellows

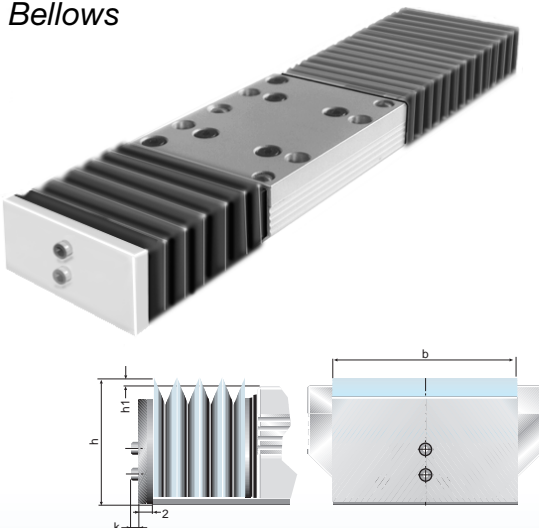

Size	b	h	h1	k	Order number
15	42	31,0	7,0	2,8	on request
20	47	35,0	5,0	2,8	
25	55	42,5	6,5	2,8	
35	68	55,0	7,0	3,5	
45	87	67,0	7,0	3,5	


Our bellows for aluminium roller guides protect the guide system from coarse contamination. The length is optional. Fixing on the cassette and end plate is effected by a bonded burdock zip.

**Material:** Synthetic fabric with polyurethane coating on one side.

**Temperature:** Contact warmth + 80°C radiation warmth +120°C

Dimensions [mm]

### Coupled rails

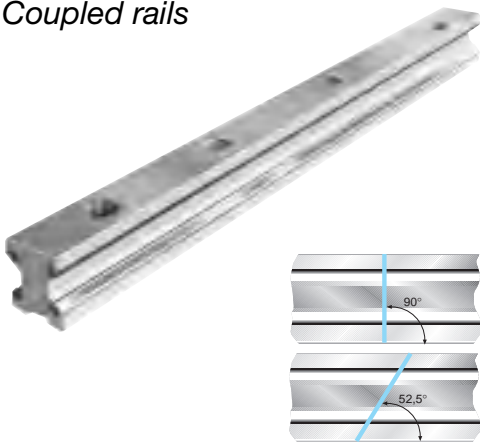


Size	Order number
12	on request
15	
20	
25	
35	
45	

For long stroke lengths our rails can be coupled. The bores will be centered due to the overall rail length.

For smoother running the rail ends can be cutted with a 52,5° angle on request.

Please consult us.

### Covers

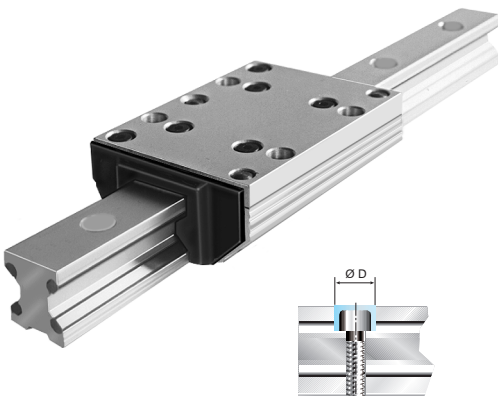


Size	Cylindric screw DIN912	D	Order number
12	M3	6	87752A
15	M4	8	87753A
20	M5	10	87754A
25	M6	11	87755A
35	M8	15	87756A
45	M10	18	87757A

**Material:** To have the wipers work properly the fastening screws of the rails have to be covered.

Wear resistant plastics, resistant to oil and ageing.

### Cover strip

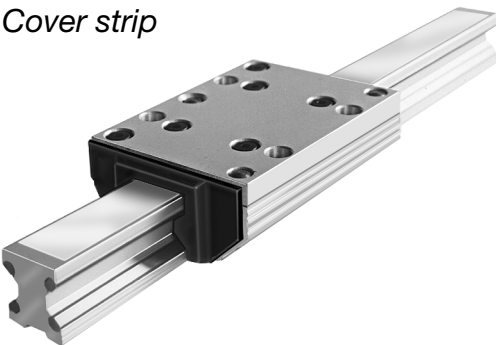

Size	Order number
12	on request
15	
20	
25	
35	
45	

Alternatively to the plastic covers a cover strip can be used to create a plain rail surface for proper function of the wipers.



# Your application

**Company:**

**Name:**

**Department:**

**Address:**


**Telefon:**

**Telefax:**

**Email:**

**Branch:**

**Application:**  
short description:

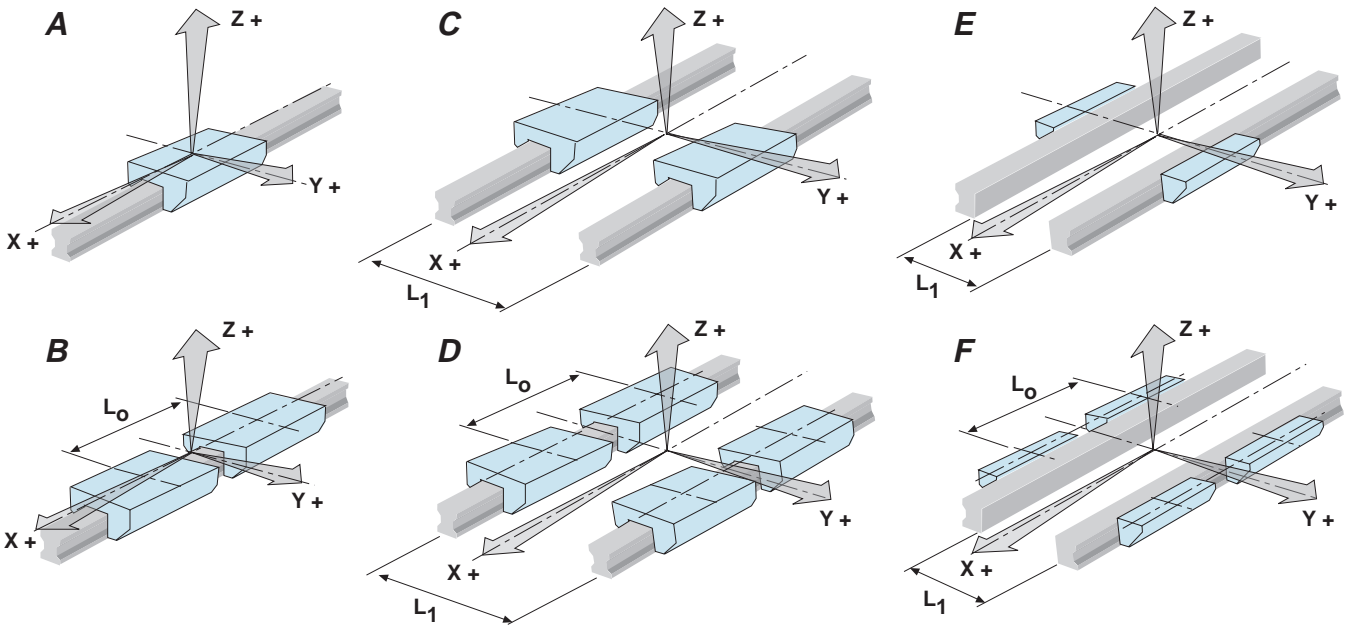

**Arrangement:**    A     B     C     D     E     F     Series: \_\_\_\_\_

**Length:**     $L_0$  and  $L_1$      $L_0 =$      $L_1 =$

**Forces:**    always from the cassette plate (center of coordinator)

+ or -	$F_x$ + or -Y - coordinats (+ or -)Z - coordinats (+ or -)	Static <input type="checkbox"/>	Dynamic <input type="checkbox"/>
+ or -	$F_y$ + or -X - coordinats (+ or -)Z - coordinats (+ or -)	<input type="checkbox"/>	<input type="checkbox"/>
+ or -	$F_z$ + or -X - coordinats (+ or -)Y - coordinats (+ or -)	<input type="checkbox"/>	<input type="checkbox"/>

**Example:**    +  $F_x = 100 \text{ N}$  +  $x = 100 \text{ mm}$     -  $y = 500 \text{ mm}$        

The loads resulting of accelerations have to be calculated by  $F_A = m \cdot 9,81 \text{ m/s}^2$

**Mounting position:**     horizontal     vertical


**Environment:**     Humidity     high temperature  
 rough dirt     Impact

Please return the filled copy

# Technical information


## 1. Construction hints

### 1.1 Double rail and cassette

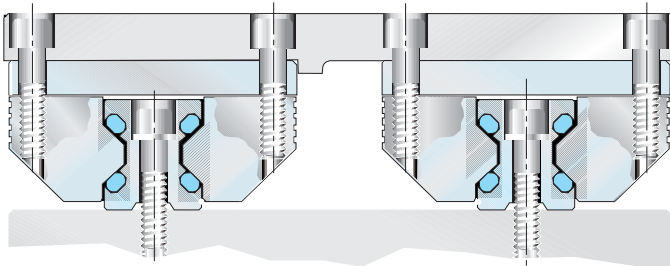

With double track arrangement precise alignment in terms of parallelism and height is necessary.

### 1.2 Single rail and roller shoes

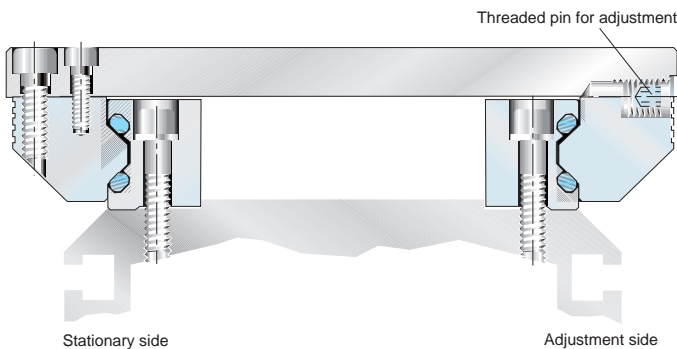


Aluminium roller guides consisting of single rails and roller shoes can be varied in the guide width. They are excellently suitable for assembly on profiled aluminium carriers, because their corrosion and temperature behaviour is homogenous.

## 2. Mounting instructions

The usable load capacity is influenced by the connection between the guide elements and the mating structure.

### 2.1 Double rails and cassettes

Depending on the load situation double rails should either be screwed or screwed and dowelled, resp. be put into grooves or against a shoulder.

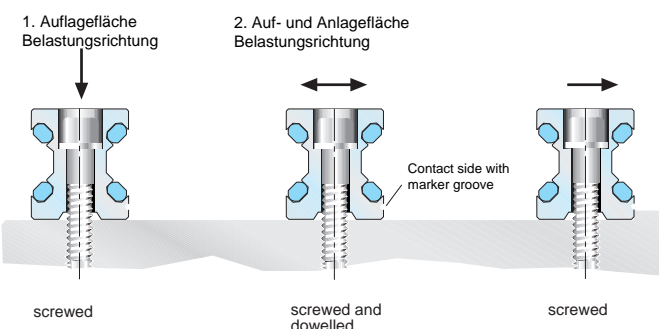


The rails rest against shoulders and are screwed resp. screwed and dowelled to the mating structure. After final checking of the linearity resp. parallelism the screws are tightened alternately from center outwards with the given torque.

Afterwards the total stroke distance is passed with the cassette. If it runs in uniform motion the mounting process can go on.

### 2.2 Stationary and movable rest side

With multitrack arrangement we recommend you to define a stationary and a movable side of the guide. This way tolerances in parallelism can be compensated best.

The example shows how this setup can be arranged. Afterwards the slider is moved along the guide path. When the movement is uniform you can proceed with mounting.

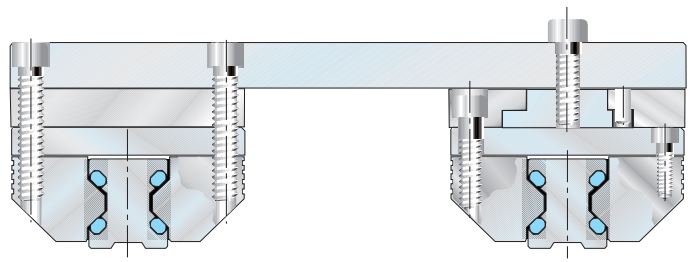

With this multitrack arrangement the movable side of the bearing is equipped with driver and locking device. The floating slider plate has a stationary and a movable rest side. The stationary side has the guiding function the movable side compensates tolerances in parallelism and height.

We recommend you to place the drive immediately near the guiding side because this side has to sustain the driving torque.

### 2.3 Single rails and roller shoes


Where single rails and roller shoes are used the mating structure takes the function of the slider.

The guide rails are put against the contact shoulder and screwed resp. screwed and dowelled. After final control of linearity resp. parallelism the screws are tightened alternately starting from the center outwards. Afterwards the slider is moved along the guide path. When the movement is uniform you can proceed with mounting.

### 2.4 Spacing

Coupled rails with a length over  $L=4000\text{mm}$  resp.  $6000\text{mm}$  are coupled together according to the Franke standard. Spacing according to the Franke standard guarantees an uniform bore shape over the whole guide and an optimum utilisation of the guide length.

Spacing according to Franke standard e.g. FDK35 - 11400

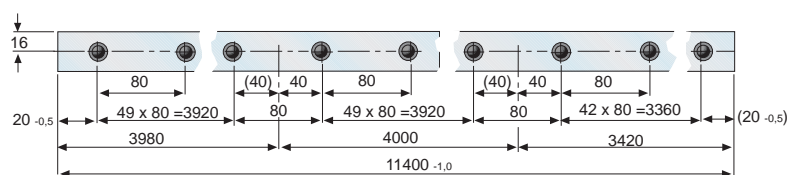


For further mounting proceed as described under point 2.1.

## 2.5 Mounting

Clean contact and rest surfaces then put the rails lose on the guide path one behind the other. With this the correct sequence of the production numbers has to be kept. (e.g. ....1.....2.....3.....4 etc.) The marking groove on the lower surface of the rail has always to be on the same side.

Now the complete guide path is aligned without gap and slightly fastened. The joints are to be aligned exactly. This is effected best by means of two auxiliary cylinders (length 200 mm). They are inserted into the raceway at the joints and clamped with a device.

For further mounting procede as described under point 10.1.

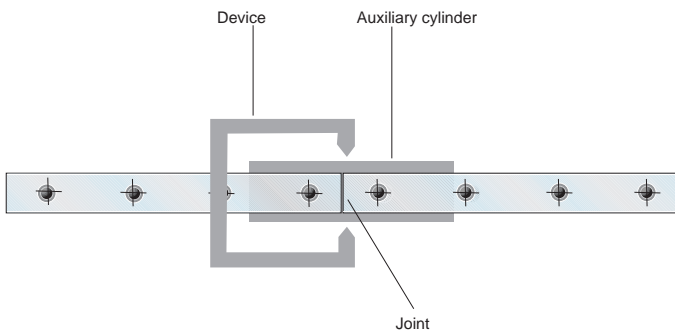

Size	Auxiliary cylinder Ø mm
12	11
15	11
20	14
25	16
35	27
45	35

## 3. Guide selection / Adjustment

### 3.1 Size of the guide system

To select the right guide size first the moments and forces acting on the bearing have to be determined. The guide size can be calculated with our calculation programm you can download from our homepage.

Recommended safety (with screws quality 8.8):

Thrust load	S > 1,2
Tensile load	S > 2,5
Moment load	S > 4,0

Generally the first decision has to be whether the guide system should be built with double rails and cassettes, or whether individual rails with roller shoes, are to be used. Hereby there are a number of variants.

### 3.2 Screwed connections

The units are fixed to the mating structure by the bore holes in the rails and the guides. Hereby the srew quality should be 8.8, washers DIN433.


To secure the screwed connections we recommend you to use suitable locking means.

Tightening moments:

	Quality 8.8 [Nm]
M3	1,1
M4	2,5
M5	5,0
M6	8,5
M8	21,0
M10	41,0
M12	71,0


### 3.3 Slide resistance / adjustment

Aluminium roller guides are adjusted in such a way that the required stiffness under load is obtained. We recommend you to measure the slide resistance as shown below. However, before doing so the mating structure should be checked for dimensional accuracy and flatness.

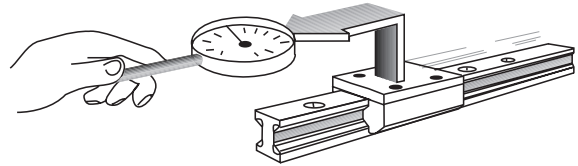

The cassettes which are mounted on the rails are adjusted clearance-free ex works. This adjusting mode refers to the point on the rail where the cassette moves most smoothly. Adjustment is effected in the non-loaded condition. The adjustment forces are shown in the diagrams on the product pages in this catalogue.

### 3.4 Double rail and roller shoes

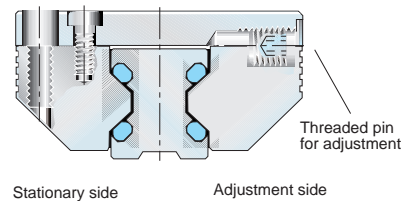

With multitrack arrangement the movable side of the bearing is equipped with driver and locking device. The floating slider plate has a stationary and a movable rest side. The stationary side has the guiding function the movable side compensates tolerances in parallelism and height.

We recommend to place the drive immediately near the guiding side because this side has to sustain the driving torque.

### 3.5 Single rails and roller shoes

Where single rails and roller shoes are used the mating structure takes the function of the slider.


The guide rails are put against the contact shoulder and screwed resp. screwed and dowelled. After final control of linearity resp. parallelism the screws are tightened alternately starting from the center outwards. Afterwards the slider is moved along the guide path. When the movement is uniform you can procede with mounting.

Principally clearance setting is effected in unloaded condition.

# Technical information

## Centering groove on the stationary side

The roller shoes are provided with centering grooves for better alignment during mounting. If you want to use it you need centering shoulders according to the data given below.

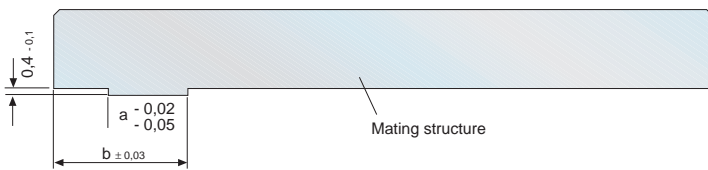

Size	a	b
12	4,5	9,6
15	5,0	12,6
20	7,5	16,1
25	10,5	17,6
35	12,5	26,1
45	15,5	31,1

## 3.6 Running accuracy

The running accuracy is measured from the screw-on-surface of the cassette to the ideal straight line of stroke. It is 0,06 mm along the whole stroke length.

## 3.7 Contact and support surfaces

The contact and support surfaces exert a substantial influence on functioning and precision of linear guides. Depending on the functional requirements of the system the mating structure has to be machined with the corresponding degree of precision, because machining errors on the mating structure are added to the running errors of the guide system. In order to guarantee troublefree functioning we recommend to observe a max. accumulated deviation of < 0.1 mm per running meter of the guide distance on the mating structure.



## Application samples Positioning systems

*Franke positioning systems comprise several series of linear modules, linear tables and rotary tables. In addition we supply precision roller tables for manual displacement. Sturdy guide blocks with or without pneumatic drive complete our programme.*

*The modular design of the components facilitates the set-up of multi-axis positioning systems.*

*Well-performing CNC control systems complete our programme offering ready to use units completely mounted and well adapted to the intended application.*



*Franke linear tables in a production line for motor housings. The double axis unit moves a dosing pin for sealing material which is applied to the contours of the housing parts.*

*(Photo SWF)*




*Franke linear table in a laser cutting plant. The linear table moves the machining head over the work piece quickly and precisely. The positioning accuracy is about 0.01 mm.*


*(Photo Trumpf/SWS)*



*Franke linear tables in a pin-mounting machine. The metal cover of the tables protect the guide system against pins that fall down from the mounting plate.*

*(Photo Autosplince)*

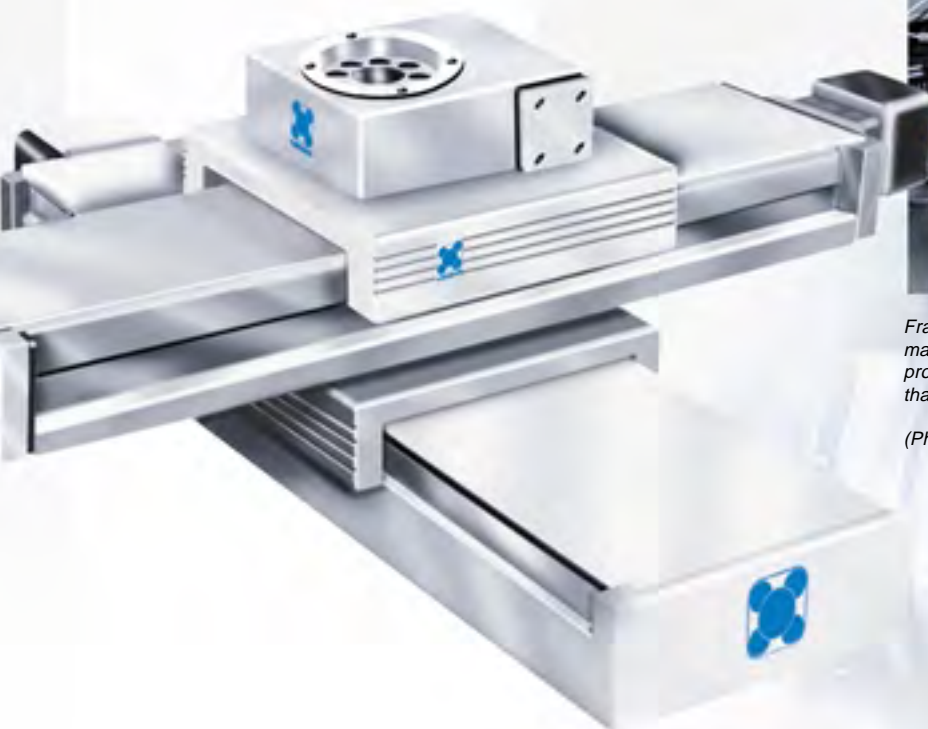

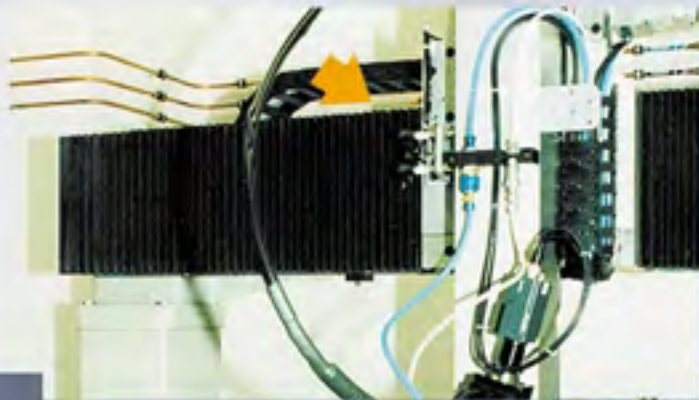

*Franke linear tables in a laser portal for manifold machining processes. Due to the clearance-free adjustment displacement is precise to the spot.*

*(Photo Siltec)*




*Franke rotary table in a x-ray monochromator. The heavy sample carrier is positioned by a Franke rotary table of high precision. The large center space of the rotary table facilitates easy centering of the x-ray.*

*(Photo Vacuum Gener.)*




*Franke linear and rotary tables in a laser welding machine for saw blades.*

*(Photo Dr. Fritsch)*

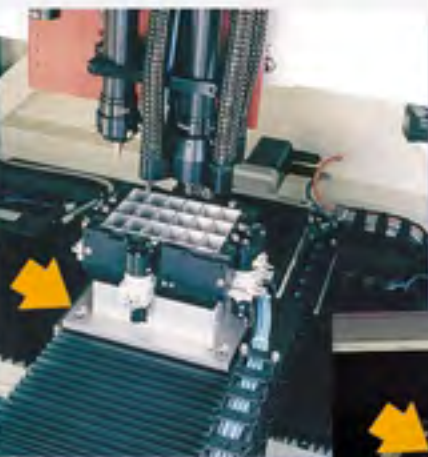

*Franke linear tables as multi-axis positioning system in a laser working installation.*

*(Photo Innolas)*

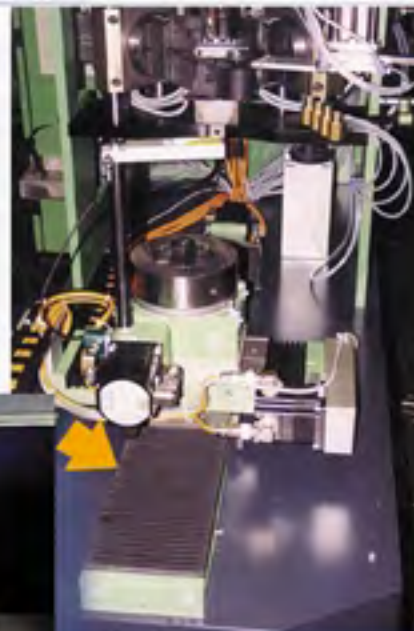



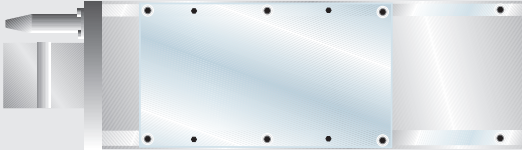

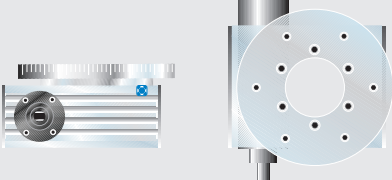



*Franke rotary tables for positioning climatic chambers. The investigation chamber is moved along 2 axes. The silent vibration-free run guarantees troublefree measuring results.*

*(Photo Litef)*



# Survey of Franke Positioning systems

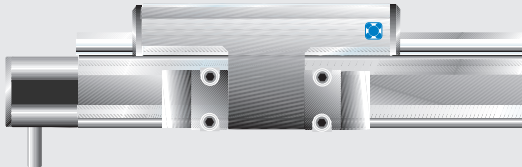	Series	Features	Capacity	Precision	Speed	Flexibility
<b>Linear modules</b> 	<b>Linear modules TLP</b>	<i>the fast</i> toothed belt or spindle drive linear modules with outer aluminium roller guide for high dynamical applications up to 5m/s with light and medium loads. Very smooth and silent running.	●	●	●	●
	<b>Linear modules TLH</b>	<i>the powerful</i> compact designed toothed belt driven linear modules with integrated aluminium roller guides. Suitable for high speed up to 10m/s, dynamic acceleration up to 40m/s <sup>2</sup> .	●	●	●	●
 	<b>Linear tables TLX with motor</b>	<i>the future</i> Linear tables with linear motors and integrated aluminium roller guides. For medium and high loads with highest requirements for acceleration and precision. Traverse speed up to 10m/s, acceleration up to 40m/s <sup>2</sup>	●	●	●	●
	<b>Linear tables TLA Light series</b>	<i>the universal</i> Spindle driven linear tables with aluminium roller guides. Compact designed aluminium body and metal cover. For light and medium loads with high requirements for positioning and repetitive accuracy.	●	●	●	●
<b>Linear tables, Sliding/Cross tables Carriage slides</b> 	<b>Linear tables TSL Heavy duty series</b>	<i>the heavy-duty</i> Linear tables with recirculating elements and spindle, aluminium body and bellows. For highest loads and highest requirements for positioning and repetitive accuracy.	●	●	●	●
	<b>Sliding/Cross tables TFR</b>	<i>the sliding tables</i> Aluminium body and compact design, available as cross-table and spindle-driven. For exact positioning in the field of measurement and controlling.	●	●	●	●
 	<b>Carriage slides TFS</b>	<i>the carriage slides</i> Steel body and heavy-duty design for the usage e.g. in welding machines. Wide selection range.	●	●	●	●
	<b>Rotary tables TSD</b>	<i>the rotating</i> Franke 4-point-contact-bearings in aluminium housings with worm gear and transmission from 18:1 to 360:1. Either for high loads or high revolution. Splash-water resistant versions, high precision.	●	●	●	●
<b>Rotary tables CNC-Control systems</b> 	<b>CNC-Control systems</b>	<i>the controlling</i> CNC/SPS-control units for 1 to 8 axes. Wide selection range and individual design of the technical features. Hard- and software especially for your application, ready-to-use with Franke positioning systems such as linear modules and tables.				

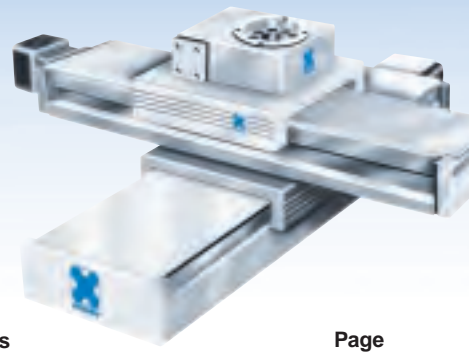

Toothed belt  
 Linear motor  
 Spindle  
 Worm gear

Stroke / resp. diameter [mm]    Load rating [kN]    Page

0 200 500 1000 2000 4000 7000    5 10 20 50 100 200 600

Drive Type	Stroke / resp. diameter [mm]	Load rating [kN]	Page
Linear motor	200 - 4000	5 - 20	70 - 71
Linear motor	200 - 7000	5 - 50	72 - 73
Linear motor	200 - 2000	5 - 50	74 - 75
Linear motor	200 - 500	5 - 50	76 - 77
Linear motor	200 - 2000	10 - 60	78 - 79
Linear motor	200 - 200	5 - 20	80 - 83
Linear motor	200 - 500	5 - 60	84 - 85
Linear motor	200 - 4000	5 - 50	86 - 88
Linear motor			89 - 91

Accessories

Page

**Mounting angle**    **Central support**

**Connection shaft**    **Motor fastening**    92 - 96

**Pin**    **T-groove rail**

**Reserving motor**

**Motor fastening**


**Mounting angle**    95 - 96

**Adapting plate**




# Linear modules

## Series TLP15R-25R with toothed belt drive

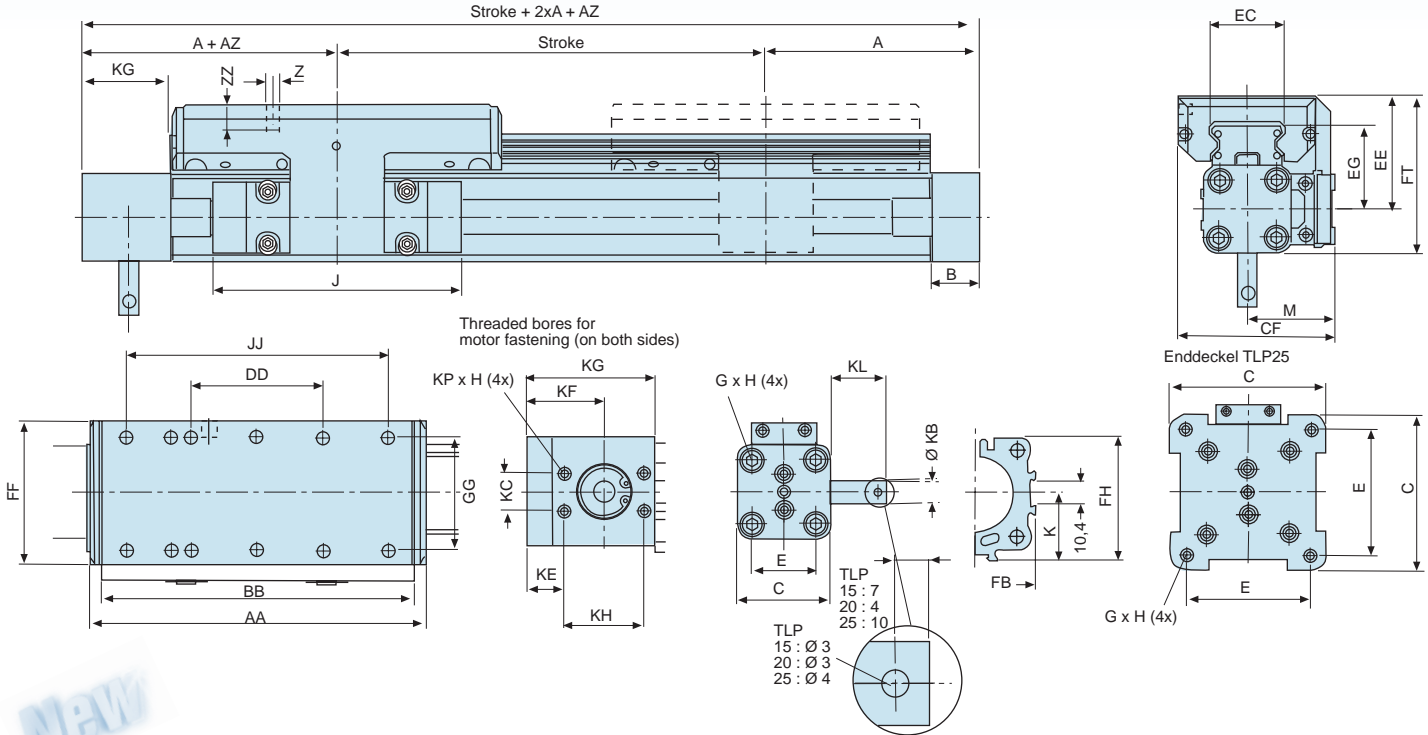

## Series TLP15S-25S with spindle drive

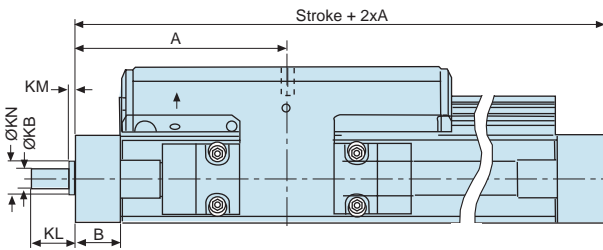

Dimensions spindle drive

Dimensions toothed belt drive

Series	A	B	KL	KB	KM	KN	Series	A	B	C	E	G	H	J	K	M	Z	ZZ
TLP15S	100	22	6 <sub>H7</sub>	17	2	13	TLP15R	125	22	41	27	M5	10	117	21,5	40,5	M6	12
TLP20S	125	25,5	10 <sub>H7</sub>	31	2	20	TLP20R	150	25	52	36	M6	12	152	28,5	49,0	M6	12
TLP25S	175	33,5	15 <sub>H7</sub>	43	3	28	TLP25R	200	25	87	70	M6	12	200	43	62	M6	16

Dimensions [mm]

Series	Load rating																								
	C <sub>0</sub>	C	AA	AZ	BB	DD	CF	EC	EE	EG	FB	FF	FH	FT	GG	JJ	KB	KC	KE	KF	KG	KH	KJ	KL	KP
TLP15R	7500	5900	154	10	144	60	72,5	32,5	53	39	40	64	39,5	73,5	50	120	10 <sub>H6</sub>	15	22,0	37,0	57	30	19 <sup>H7</sup>	24	M5
TLP20R	8500	6700	197	11	187	80	91,0	42,0	62	48	52	84	51,7	88,0	64	160	10 <sub>H6</sub>	18	17,5	36,5	61	38	26 <sup>H7</sup>	26	M6
TLP25R	23700	16900	276	24	266	120	117,0	63,0	75	57	76	110	77,0	118,5	90	240	16 <sub>H6</sub>	32	23,5	48,5	85	50	40 <sup>H7</sup>	34	M8

Dimensions [mm]

### Consists of:

- Anodized Aluminium body
- External Aluminium roller guide
- Integrated toothed belt

### Features:

- Fast and dynamic movements
- Light and compact design
- Cassettes with felt seal
- Strokes up to 3400 mm
- Toothed belt inside aluminium housing with steel cover

### Load capacity:

- See survey on page 69
- We are gladly prepared to calculate the loads in your application


### Operation temperature:

- Continuous operation: -30°C up to +80°C.

### Options:

- Motor-/gear assembly by hollow shaft
- Custom specified Motor-/gear assemblies
- Motorization with stepper- or servomotors
- Counterwise actuating direction (1) or bi-parting version (2 carriers)
- Unit switches fixed at dovetail grooves
- Multi axis assemblies including intermediate drive shafts, adapter plates and profile mountings
- Solutions for integrated Automation applications including
- Franke CNC/PLC-controller (1-8 axis)


**Material:** Grooved profiled tube from aluminium, anodized, toothed belt from polyurethane steel cord fabric, belt wheels from aluminium, cover tape from corrosion-free tempering steel, roller guide, and slider from anodized aluminium, rolling elements from ball bearing steel 100 Cr 6, carrying rail from anodized aluminium and steel, temperature range -30°C up to +80°C, protective system IP 54

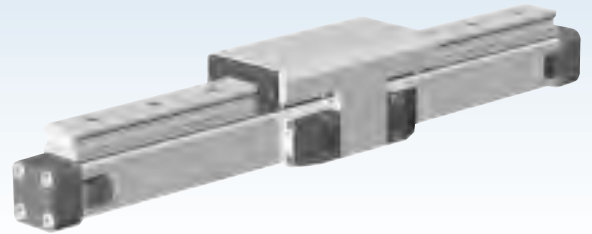

	Stroke [mm]	Order number					
		TLP15		TLP20		TLP25	
		with tooth belt	with spindle	with tooth belt	with spindle	with tooth belt	with spindle
<b>Linear modules</b>	100	92700A	92700S	92734A	92734S	92768A	92768S
total length: Stroke + 2 x A + AZ	200	92701A	92701S	92735A	92735S	92769A	92769S
	300	92702A	92702S	92736A	92736S	92770A	92770S
	400	92703A	92703S	92737A	92737S	92771A	92771S
	500	92704A	92704S	92738A	92738S	92772A	92772S
	600	92705A	92705S	92739A	92739S	92773A	92773S
	700	92706A	92706S	92740A	92740S	92774A	92774S
	800	92707A	92707S	92741A	92741S	92775A	92775S
	900	92708A	92708S	92742A	92742S	92776A	92776S
	1000	92709A	92709S	92743A	92743S	92777A	92777S
	1100	92710A	92710S	92744A	92744S	92778A	92778S
	1200	92711A		92745A	92745S	92779A	92779S
	1300	92712A		92746A	92746S	92780A	92780S
	1400	92713A		92747A	92747SB	92781A	92781S
	1500	92714A		92748A	92748S	92782A	92782S
	1600	92715A		92749A	92749S	92783A	92783S
	1700	92716A		92750A	92750S	92784A	92784S
	1800	92717A		92751A	92751S	92785A	92785S
	1900	92718A		92752A	92752S	92786A	92786S
	2000	92719A		92753A	92753S	92787A	92787S
	2100	92720A		92754A		92788A	92788S
	2200	92721A		92755A		92789A	92789S
	2300	92722A		92756A		92790A	92790S
	2400	92723A		92757A		92791A	92791S
	2500	92724A		92758A		92792A	92792S
	2600	92725A		92759A		92793A	92793S
	2700	92726A		92760A		92794A	92794S
	2800	92727A		92761A		92795A	92795S
	2900	92728A		92762A		92796A	92796S
	3000	92729A		92763A		92797A	92797S
	3100	92730A		92764A		92798A	92798S
	3200	92731A		92765A		92799A	92799S
	3300	92732A		92766A		92800A	92800S
	3400	92733A		92767A			
<b>Performance:</b>							
Max. exerted force (N)	$F_z / F_y$		857		1171		3111
Max. moment (Nm)	$M_y, M_z / M_x$		55/18		91/36		313/139
Load rating: stat. / dyn.	Co / C		3400/4200		5400/5400		15100/13500
Max speed	(m/s)	2	0,25	3	0,25/0,5	5	0,25/0,5/1,25/2,5
Linear way per revolution of motor	(mm)	60	5	60	5/10	100	5/10/25/50
Max. RPM of drive axis	(min <sup>-1</sup> )		2000		3000		3000
Max. effective acting force $F_x$	< 1 m/s (N)	55	250		600		1500
at speed	1-2 m/s (N)	50	250	150	600	425	1500
	> 2 m/s (N)	-	-	120	-	375	-
Max. permissible driving moment	< 1 m/s (Nm)	0,9	-	100	1,5/2,8	300	4,2/7,5/20/20
at speed	1-2 m/s (Nm)	0,9	0,6	2,3	-	10,0	-
	> 2 m/s (Nm)	-	-	2,0	-	9,5	-
Max. acceleration / retardation	(m/s <sup>2</sup> )	10	10	1,8	10	7,5	10
Repetitive accuracy	(mm/m)		±0,05	10	±0,05	10	±0,05
Positioning accuracy*	(mm/m)		±0,15		±0,15		±0,15
Running accuracy	(mm)		±0,03		±0,03		±0,03
Mass (stroke Ø) / add. per 100mm / carriage	(kg)		18/0,43/0,75	1,9/0,36/0,75	3,7/0,7/1,18	8,2/1,32/2,5	8,8/1,01/2,5

\* depending on several factors

#### Running direction



0 = Standard


1 = Optional

#### Loads, forces, and moments


The highest possible loads are given in the table above. If there are several forces and moments acting simultaneously on the guide the following equation has to be fulfilled:

$$\frac{M_y}{M_{y \max.}} + \frac{M_x}{M_{x \max.}} + \frac{M_z}{M_{z \max.}} + \frac{F_z}{F_{z \max.}} + \frac{F_y}{F_{y \max.}} \leq 1$$

The total of the loads is not allowed to become > 1. The table indicates the maximum permissible values for a smooth and shock-free operation. They should not be exceeded even under dynamic operating conditions.

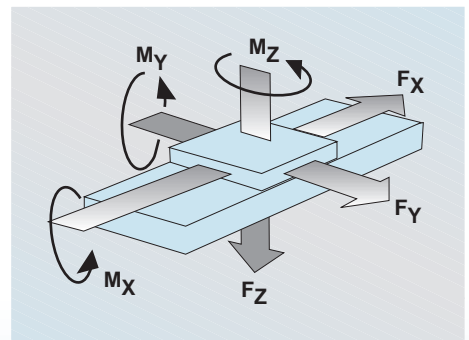

## Series TLH15 - 35

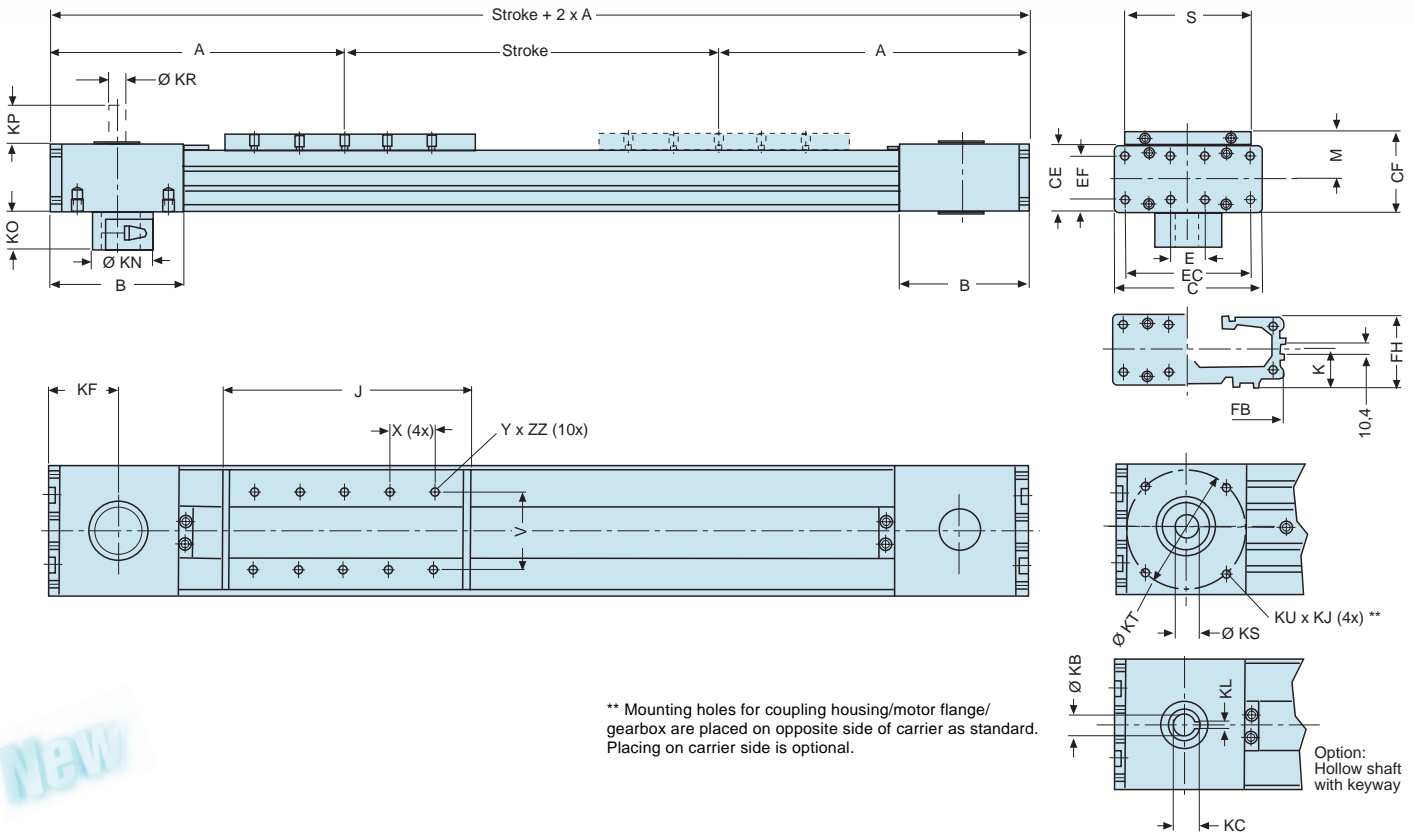

\*\* Mounting holes for coupling housing/motor flange/gearbox are placed on opposite side of carrier as standard. Placing on carrier side is optional.

Series	Dimensions																															
	A	B	C	E	G	H	J	K	M	S	V	X	Y	CE	CF	EC	EF	FB	FH	KF	KB*	KC	KL	KJ	KN	KO	KP	KR	KS*	KT	KU	ZZ
15	218	88	93	25	M5	10	178	21,5	31	85	64	40	M6	42	52,5	79	27	92	39,5	49,0	16 <sup>H7</sup>	18,3	5	8	34	21,7	30	16 <sup>H7</sup>	16 <sup>H7</sup>	82	M8	8
20	262	112	116	28	M6	12	218	28,5	38	100	64	40	M6	56	66,5	100	36	116	51,7	62,0	22 <sup>H7</sup>	24,8	6	12	53	30,0	30	22 <sup>H7</sup>	22 <sup>H7</sup>	106	M10	10
35	347	147	175	18	M6	12	263	43,0	49	124	90	60	M6	87	92,5	158	70	164	77,0	79,5	32 <sup>H7</sup>	35,3	10	19	75	41,0	35	32 <sup>H7</sup>	32 <sup>H7</sup>	144	M12	10

Dimensions [mm] \* other dimensions for KS and KB on request

### Components:

- Slotted profile with dovetail grooves
- Integrated Alu-Rollerguides
- Integrated toothed belt drive

### Characteristics:

- High speed and accelerations
- Compact design
- Strokes up to 7000 mm
- Ideal for multi-axis applications
- Alu-Rollerguide and toothed belt-drive in slotted profile integrated and covered with stainless steel sealing band

### Loadings:

- see performance overview
- Use our technical service for calculations

### Ambient temperature range:

- -30° bis +80 ° C

### Mounting situation:


- anyone. For vertical movements we recommend a brake


### Maintenance:

- Low maintenance caused on lifetime lubrication

### Options:

- Integrated planetary gearbox
- Motor-/gear assembly by hollow shaft with keyway
- Custom specified Motor-/gear assemblies
- Motorization with stepper- or servomotors
- Counterwise actuating direction (1) or bi-parting version (2 carriers)
- Unit switches fixed at dovetail grooves
- Multi axis assemblies including intermediate drive shafts, adapter plates and profile mountings
- Solutions for integrated Automation applications including Franke CNC/PLC-controller (1-8 axis)

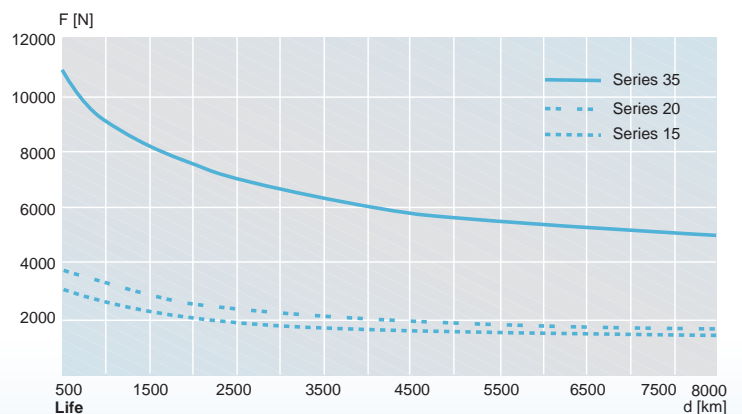

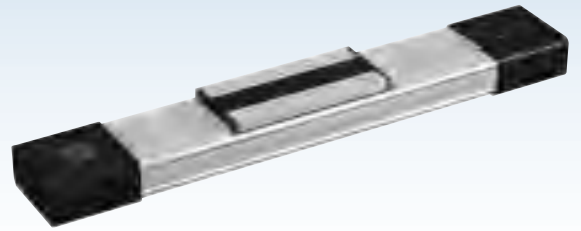


Stroke [mm]	Order number		
	TLH15 without motor	TLH20 without motor	TLH35 without motor
100	92900A	92925A	92950A
200	92901A	92926A	92951A
300	92902A	92927A	92952A
400	92903A	92928A	92953A
500	92904A	92929A	92954A
600	92905A	92930A	92955A
700	92906A	92931A	92956A
800	92907A	92932A	92957A
900	92908A	92933A	92958A
1000	92909A	92934A	92959A
1200	92910A	92935A	92960A
1400	92911A	92936A	92961A
1600	92912A	92937A	92962A
1800	92913A	92938A	92963A
2000	92914A	92939A	92964A
2500	92915A	92940A	92965A
3000	92916A	92941A	92966A
3500	92917A	92942A	92967A
4000	92918A	92943A	92968A
4500	92919A	92944A	92969A
5000	92920A	92945A	92970A
5500	92921A	92946A	92971A
6000	92922A	92947A	92972A
6500	92923A	92948A	92973A
7000	92924A	92949A	92974A

#### Performance:

Load rating: stat. / dyn.	Co / C	3400 / 4200	5400 / 5400	18000 / 12500
Max. moment (Nm)	$M_x, M_y, M_z$	45 / 274	76 / 460	294 / 1233
Max speed	(m / s)	10	10	10
Max. acceleration / retardation	( $m/s^2$ )	40	40	40
Max. effective acting force $F_x$	(N)	1070	1870	3120
at speed	(N)	890	1560	2660
		550	1030	1940
Driving moment(without load)	(Nm)	1,2	2,2	3,2
Mass (stroke 0) / add per m / carriage	(kg)	3,8 / 4,3 / 1,0	7,7 / 6,7 / 1,9	22,6 / 15,2 / 4,7
Max. permissible driving moment	(Nm)	31	71	174
at speed	(Nm)	25	60	148
	(Nm)	16	39	108
Max. acceleration / retardation	(mm)	180	240	350
Max. speed at shaft (rpm)	( $min^{-1}$ )	3000	2500	1700
Repetitive accuracy	(mm/m)	+/-0,05	+/-0,05	+/-0,05
Positioning accuracy*	(mm/m)	+/-0,15	+/-0,15	+/-0,15
Running accuracy	(mm)	+/-0,03 / 300	+/-0,03 / 300	+/-0,03 / 300

\* depending on several factors

#### Running direction

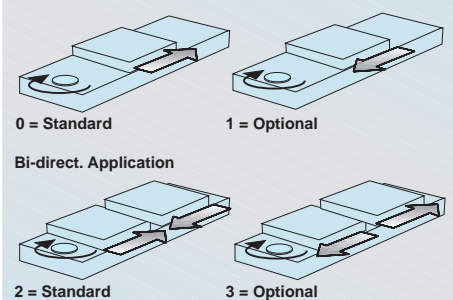


#### Loads, forces, and moments

The highest possible loads are given in the table above. If there are several forces and moments acting simultaneously on the guide the following equation has to be fulfilled:

$$\frac{M_y}{M_{y \max.}} + \frac{M_x}{M_{x \max.}} + \frac{M_z}{M_{z \max.}} + \frac{F_z}{F_{z \max.}} + \frac{F_y}{F_{y \max.}} \leq 1$$

The total of the loads is not allowed to become > 1. The table indicates the maximum permissible values for a smooth and shock-free operation. They should not be exceeded even under dynamic operating conditions.

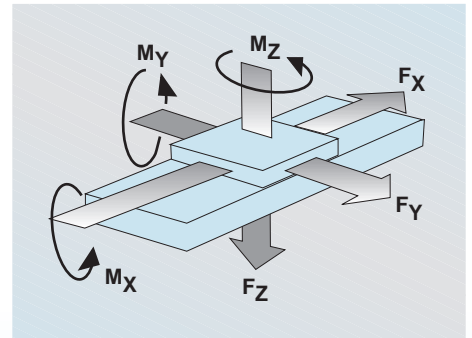




# Linear tables

with linear motor

## Series TLX

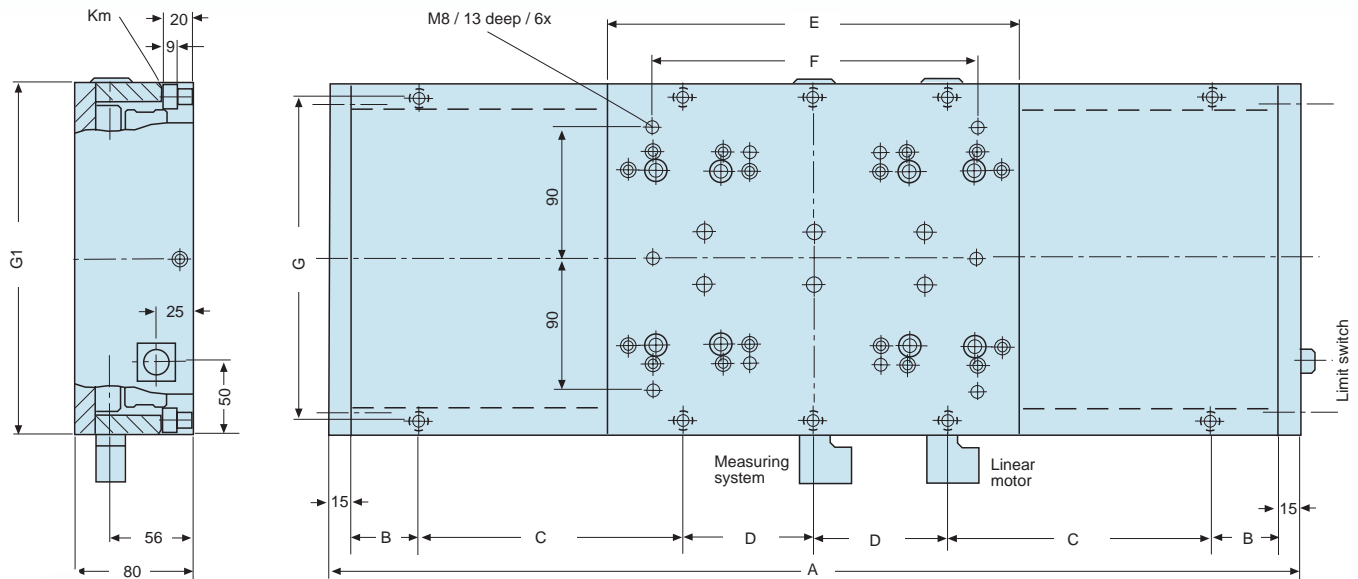

NEW

Stroke	Dimensions				Bore configuration					km DIN74
	A	B	G	G1	C	D	E	F		
250	600	45	221	240	180	90	280	221	8	
500	1020	45	221	240	180	90	280	221	8	
750	1380	45	221	240	180	90	280	221	8	
1000	1730	40	221	240	180	90	280	221	8	
1250	2080	35	221	240	180	90	280	221	8	
1500	2450	40	221	240	180	90	280	221	8	
1750	2820	45	221	240	180	90	280	221	8	
2000	3170	40	221	240	180	90	280	221	8	

Dimensions [mm]

### Consists of:

- Anodised body
- integrated Aluminium roller guide
- integrated linear motor
- integrated linear measuring system

### Features:

- highest dynamical movements
- highest positioning accuracy
- smooth and silent running
- compact design
- strokes up to 2000mm

### Guide system:

- FEA25 with two pairs of roller shoes

### Drive:

- Linear motor LMA11-50

### Measuring system:

- integrated inkremental length measuring system LIDA487

### Limit switches:

- reed switches adjusted to end of stroke

### Mounting position:

- optional

### Operation temperature:

- 0° to +50°C. (other temperatures on request)

### Traverse speed:

- max 8m/s

### Acceleration:

- max. 40 m/s<sup>2</sup>.

### Positioning accuracy:

- +/-15µm (due to the operating measuring system)

### Repetitive accuracy:

- +/-10µm (due to the resolution of the measuring system)

### Maintenance:

- low maintenance costs due to lifetime lubrication of the guide system

### Optional:

- complete positioning system including Franke CNC-control unit.






Stroke	Load rating C [N]	Moments		Acceleration max. m / sec. <sup>2</sup>	Traverse speed max. m / sec.	Drive force F <sub>x</sub> max. N	Magnetic track L	Fast. screw M8KS [Anzahl]	Weight incl. Motor [kg]	Order number incl. Motor
		M <sub>CX</sub> [Nm]	M <sub>CY</sub> , M <sub>CZ</sub> [Nm]							
250	24050	1230	2070	40	8	615	512	10	26	93600A
500	24050	1230	2070	40	8	615	768	14	34	93601A
750	24050	1230	2070	40	8	615	1024	18	42	93602A
1000	24050	1230	2070	40	8	615	1280	22	50	93603A
1250	24050	1230	2070	40	8	615	1536	26	58	93604A
1500	24050	1230	2070	40	8	615	1792	30	66	93605A
1750	24050	1230	2070	40	8	615	2048	34	75	93606A
2000	24050	1230	2070	40	8	615	2304	38	83	93607A




**Linear motor:** The dynamics of movement is considerably increased by the use of linear motors. Where no mechanical driving units like spindles or toothed belts are used the movement is effected directly.

As attachment parts like flanges and clutches are not necessary we built very compact linear tables with linear motors. There are no disturbing parts. If you are interested in a table with linear motor please consult us. We are prepared to advise you.

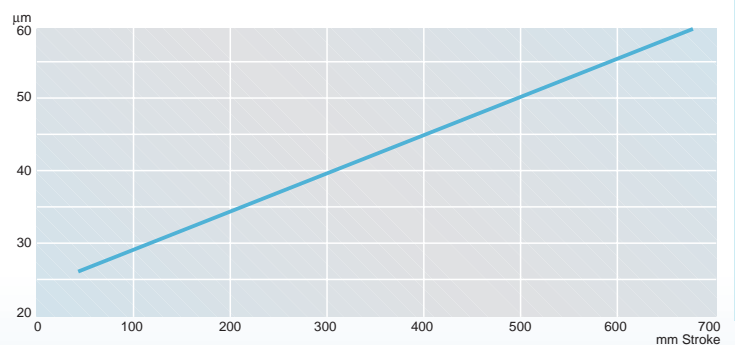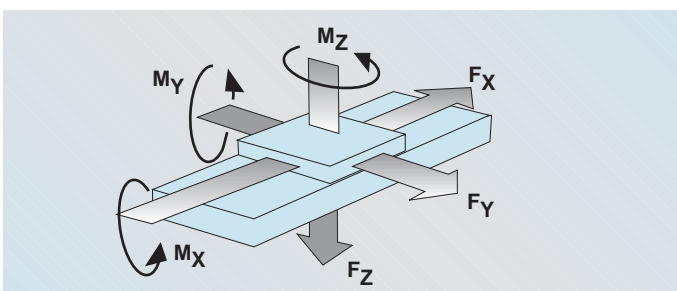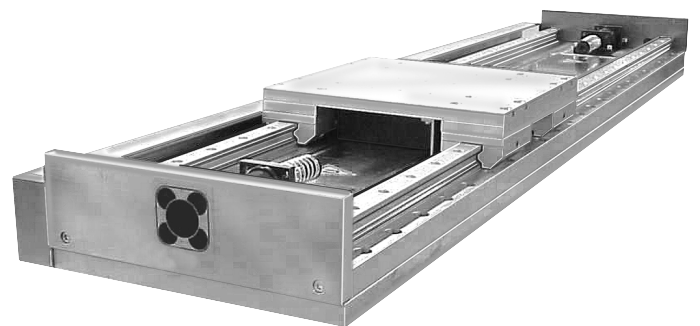



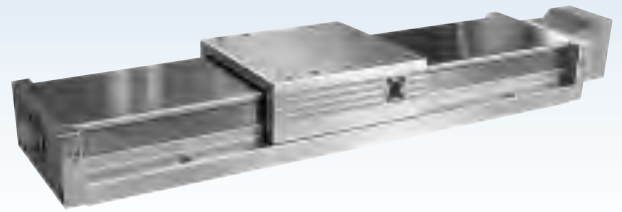

## TLA15

Stroke	Load rating C [N]	Moments		Lenght					Traverse speed max. [m/min.]	RPM Spindle max. [min. <sup>-1</sup> ]	Spindle-Ø x -pitch	Fast. screw DIN912 with wash. DIN433 [Anz. x Gr.]	Weight [kg]	Order number
		Mcx [Nm]	Mcy, Mcz [Nm]	L5	L	LA	LF	Z [Anzahl]						
100	3000	187	228	78	352	284	256	1	15	3000	12x5	4xM5	3,0	92600A
200	3000	187	228	28	452	384	356	3	15	3000	12x5	8xM5	3,8	92601A
300	3000	187	228	78	552	484	456	3	15	3000	12x5	8xM5	4,8	92602A
400	3000	187	228	28	652	584	556	5	15	3000	12x5	12xM5	5,6	92603A
500	3000	187	228	78	752	684	656	5	11	2200	12x5	12xM5	6,4	92604A
600	3000	187	228	28	852	784	756	7	11	2200	12x5	16xM5	7,4	92605A
700	3000	187	228	78	952	884	856	7	10	2000	12x5	16xM5	8,5	92606A

Dimensions [mm], Load rating [N], Moments [Nm]

## TLA25

Stroke	Load rating C [N]	Moments		Lenght					Traverse speed max. [m/min.]	RPM Spindle max. [min. <sup>-1</sup> ]	Spindle-Ø x -pitch	Fast. screw DIN912 with wash. DIN433 [Anz. x Gr.]	Weight [kg]	Bestell-Nr.
		Mcx [Nm]	Mcy, Mcz [Nm]	L5	L	LA	LF	Z [Anzahl]						
100	6000	433	551	88	392	324	296	1	15	3000	12x5	4xM6	5,8	92607A
200	6000	433	551	18	492	424	396	3	15	3000	12x5	8xM6	7,0	92608A
300	6000	433	551	68	592	524	496	3	15	3000	12x5	8xM6	8,2	92609A
400	6000	433	551	118	692	624	596	3	15	3000	12x5	8xM6	9,4	92610A
500	6000	433	551	48	792	724	696	5	11	2200	12x5	12xM6	10,6	92611A
600	6000	433	551	98	892	824	796	5	11	2200	12x5	12xM6	11,8	92612A
700	6000	433	551	28	992	924	896	7	10	2000	12x5	16xM6	12,0	92613A



Dimensions [mm], Load rating [N], Moments [Nm]

## TLA35

NEW

Stroke	Load rating C [N]	Moments		Lenght					Traverse speed max. [m/min.]	RPM Spindle max. [min. <sup>-1</sup> ]	Spindle-Ø x -steig.	Fast. screw DIN912 with wash. DIN433 [Anz. x Gr.]	Weight [kg]	Order number
		Mcx [Nm]	Mcy, Mcz [Nm]	L5	L	LA	LF	Z [Anzahl]						
100	9000	995	1308	98	452	384	356	1	15	3000	12x5	4xM6	17,0	92614A
200	9000	995	1308	148	552	484	456	1	15	3000	12x5	4xM6	19,1	92615A
300	9000	995	1308	38	652	584	556	3	15	3000	12x5	8xM6	21,2	92616A
400	9000	995	1308	88	752	684	656	3	11	2200	12x5	8xM6	23,3	92617A
500	9000	995	1308	138	852	784	756	3	11	2200	12x5	8xM6	25,4	92618A
600	9000	995	1308	28	952	884	856	5	10	2000	12x5	12xM6	27,5	92619A
700	9000	995	1308	76	1048	980	952	5	10	2000	12x5	12xM6	29,6	92620A

Dimensions [mm], Load rating [N], Moments [Nm]

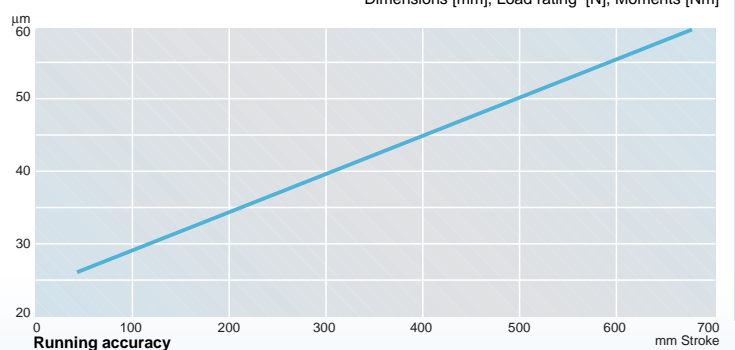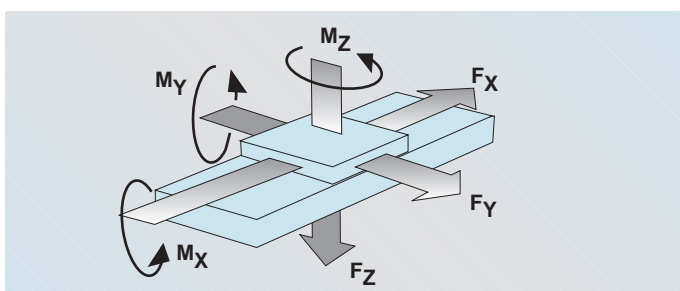




# Linear tables

Heavy duty series

## Series TSL

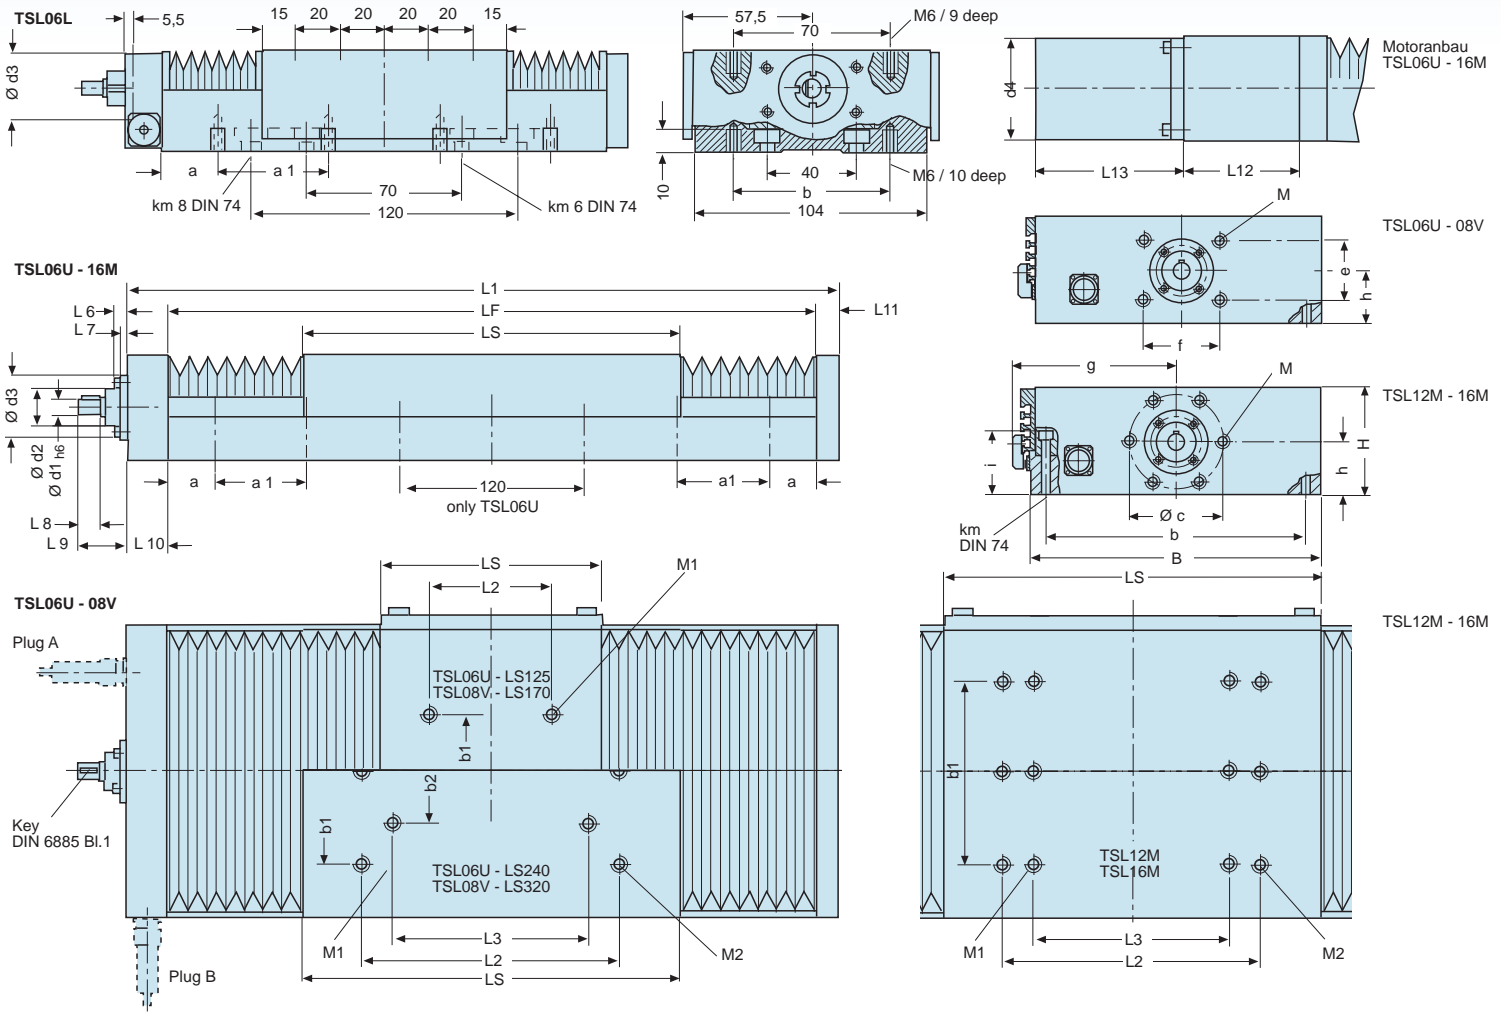

Size	Main dimensions										Mounting dimensions							Mounting dim. motor						
	L1	B	H	g	i	L11	h	f	e	c	M	d1	d2	d3	L6	L7	L8	L9	L10	d4	L12	L13	Plug arrangement	
06L	236-336	115	45	-	-	10	28	40	20	-	4xM5 / 10tief	6	16	30 <sup>+0,05</sup>	-	-	10	20	26	□	85	60	110	B
06U	329-1449	165	55	102,5	28	20	30	54	31	-	4xM6 / 12tief	8,5	24	45 <sup>-0,02</sup>	9	5	12	23	29	□	85	68	140	A
08V	789-1589	250	80	141,0	40	10	44	61,4	43	-	4xM6 / 12tief	13	25	60 <sup>-0,01</sup>	15	9	20	41	29	□	85	95	140	A
12M	770-1970	314	115	175,0	68	25	57,5	-	-	100	4xM8 / 16tief	16	40	68 <sup>-0,01</sup>	14	8	24	53	45	□	85	110	170	A
16M	945-2095	392	135	214,0	84	25	72	-	-	100	6xM8 / 16tief	20	42	84 <sup>-0,02</sup>	16	8	30	59	70	□	110	115	180	A

Dimensions [mm], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body
- integrated Aluminium roller guide
- spindle drive

### Features:

- for high loads from all directions
- highest accuracy
- strokes up to 1200mm

### Spindle:

- preloaded ball screw spindle, (pitch see table)
- other spindles on request

### Mounting position:

- optional, with vertical position we recommend a brake

### Positioning accuracy:

- due to spindle pitch +/-0,03/300mm
- other accuracies on request

### Repetitive accuracy:

- < 0,01mm

### Lubrication:

- lifetime lubrication with bearing grease (see page 98)

### Load capacity:

- see table (loads, moments)
- with loads without acceleration or moment loads static safety S >3. With dynamic moments S >6. We are gladly prepared to calculate the static safety and lifetime in your application.

### Operation temperature:

- 10 to +75C. (other temperatures on request)

### Options:

- limit switches integrated inside the table
- reference switches
- adapting plates for motors of your choice
- other motors
- measuring systems
- complete positioning systems including Franke CNC-control units and software (1-8 axes), see page 90-91.
- Please consult us.



## TSL06L

Stroke	Load rating C [N]	Moments		Length		Dim. Guide			Dimensions Slider					Spindle		Traverse speed		RPM spindle		Weight without motor [kg]	Order num.		
		MCX [Nm]	MCY, MCZ [Nm]	L1	LF	a	a1	b	km	LS	L2	L3	b1	b2	M1	M2	Ø x Steig	Stand [m/min]	max. [m/min]			Stand [m/min]	max. [m/min]
40	10450	308	188	236	200	25	50	70	-	110	-	-	-	-	-	-	12x5	8	15	1600	3000	2,7	90510K
75	10450	308	188	286	250	25	50	70	-	110	-	-	-	-	-	-	12x5	8	15	1600	3000	3,5	90511M
105	10450	308	188	336	300	25	50	70	-	110	-	-	-	-	-	-	12x5	8	15	1600	3000	4,3	90512I

## TSL06U

100	15500	675	223	329	280	20	60	148	6	125	40	-	120	-	4xM8/12tief	-	12x5	8	15	1600	3000	7,0	90016A
150	15500	675	223	389	340	50	60	148	6	125	40	-	120	-	4xM8/12tief	-	12x5	8	15	1600	3000	7,8	90017A
200	15500	675	223	449	400	40	100	148	6	125	40	-	120	-	4xM8/12tief	-	12x5	8	15	1600	3000	8,6	90019A
350	15500	675	223	649	600	40	100	148	6	125	40	-	120	-	4xM8/12tief	-	12x5	8	15	1600	3000	11,4	90021A
500	15500	675	223	849	800	40	100	148	6	125	40	-	120	-	4xM8/12tief	-	12x5	8	12	1600	2400	14,1	90023A
730	15500	675	223	1149	1100	90	100	148	6	125	40	-	120	-	4xM8/12tief	-	12x10	8	13	800	1300	18,3	90025A
950	15500	675	223	1449	1400	40	100	148	6	125	40	-	120	-	4xM8/12tief	-	12x10	8	8	800	800	22,4	90027A
110	31000	1384	1938	449	400	40	100	148	6	240	148	-	120	-	4xM6/12tief	-	12x5	8	15	1600	3000	10,2	90018A
260	31000	1384	1938	649	600	40	100	148	6	240	148	-	120	-	4xM6/12tief	-	12x5	8	15	1600	3000	12,9	90020A
410	31000	1384	1938	849	800	40	100	148	6	240	148	-	120	-	4xM6/12tief	-	12x5	8	12	1600	2400	15,7	90022A
640	31000	1384	1938	1149	1100	90	100	148	6	240	148	-	120	-	4xM6/12tief	-	12x10	8	13	800	1300	19,8	90024A
870	31000	1384	1938	1449	1400	40	100	148	6	240	148	-	120	-	4xM6/12tief	-	12x10	8	8	800	800	24,0	90026A

## TSL08V

440	31000	2550	625	789	750	25	100	230	8	170	150	-	200	-	4xM8/12tief	-	20x5	7	12,5	1400	2500	24,0	90211K
700	31000	2550	625	1089	1050	25	100	230	8	170	150	-	200	-	4xM8/12tief	-	20x5	7	12,5	1400	2500	30,0	90213F
880	31000	2550	625	1289	1250	25	100	230	8	170	150	-	200	-	4xM8/12tief	-	20x5	7	10,5	1400	2100	35,0	90215H
1000	31000	2550	625	1589	1550	25	100	230	8	170	150	-	200	-	4xM8/12tief	-	20x20	16	25,0	800	1300	40,0	90217A
320	62000	5100	6200	789	750	25	100	230	8	320	230	185	200	100	6xM8/12tief	4xM6/9tief	20x5	7	12,5	1400	2500	28,0	90210V
570	62000	5100	6200	1089	1050	25	100	230	8	320	230	185	200	100	6xM8/12tief	4xM6/9tief	20x5	7	12,5	1400	2500	34,0	90212Q
730	62000	5100	6200	1289	1250	25	100	230	8	320	230	185	200	100	6xM8/12tief	4xM6/9tief	20x5	7	10,5	1400	2100	39,0	90214J
950	62000	5100	6200	1589	1550	25	100	230	8	320	230	185	200	100	6xM8/12tief	4xM6/9tief	20x20	16	25,0	800	1300	44,0	90216A



## TSL12M

200	108000	12580	13600	770	700	50	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x5	8	12	1600	2400	56,0	90310H
300	108000	12580	13600	920	850	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x5	8	12	1600	2400	62,0	90311E
400	108000	12580	13600	1020	950	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x5	8	12	1600	2400	65,0	90312F
500	108000	12580	13600	1120	1050	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x5	8	12	1600	2400	69,0	90313H
650	108000	12580	13600	1320	1250	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x5	8	12	1600	2400	76,0	90314D
800	108000	12580	13600	1520	1450	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x10	12	20	1200	2000	83,0	90315C
1000	108000	12580	13600	1720	1650	75	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x10	12	15	1200	1500	91,0	90316F
1200	108000	12580	13600	1970	1900	50	100	280	8	410	280	230	200	-	6xM8/16tief	6xM8/16tief	25x10	10	11	1000	1100	100,0	90317D

## TSL16M


200	192000	28600	31700	945	850	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x5	6	11,5	1200	2300	110,0	90410C
300	192000	28600	31700	1045	950	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x5	6	11,5	1200	2300	115,0	90411C
400	192000	28600	31700	1145	1050	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x5	6	11,5	1200	2300	120,0	90412D
500	192000	28600	31700	1245	1150	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x5	6	11,5	1200	2300	126,0	90413C
650	192000	28600	31700	1445	1350	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x5	6	11,5	1200	2300	136,0	90414D
800	192000	28600	31700	1645	1550	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x10	12	23,0	1200	2300	147,0	90415J
1000	192000	28600	31700	1845	1750	75	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x10	12	20,0	1000	2000	157,0	90416C
1200	192000	28600	31700	2095	2000	50	100	355	10	540	355	280	200	-	6xM8/12tief	6xM10/15tief	32x10	10	14,0	1000	1400	170,0	90417H

Dimensions [mm], Load rating [N], Moments [Nm]

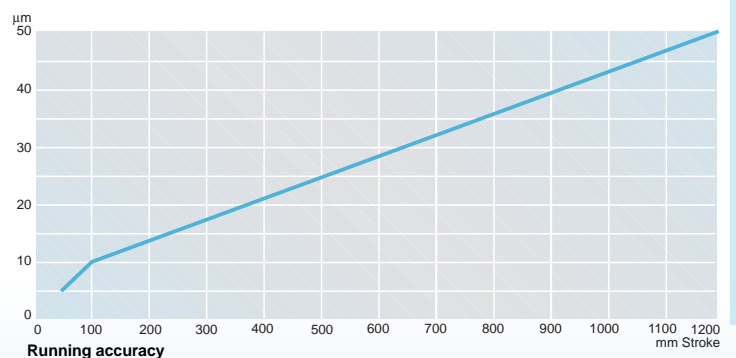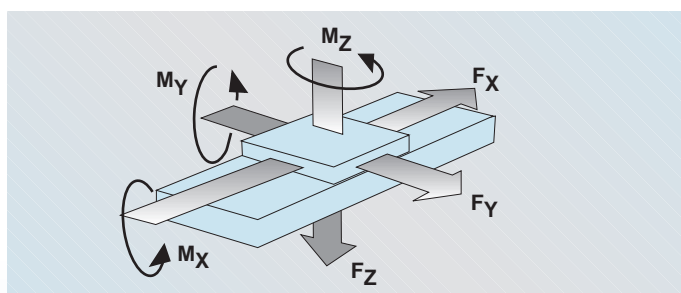




# Sliding tables

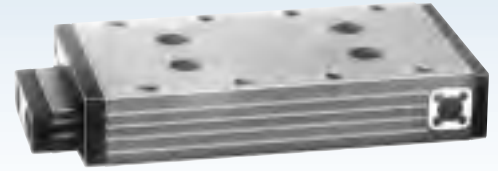

Series TFR...A

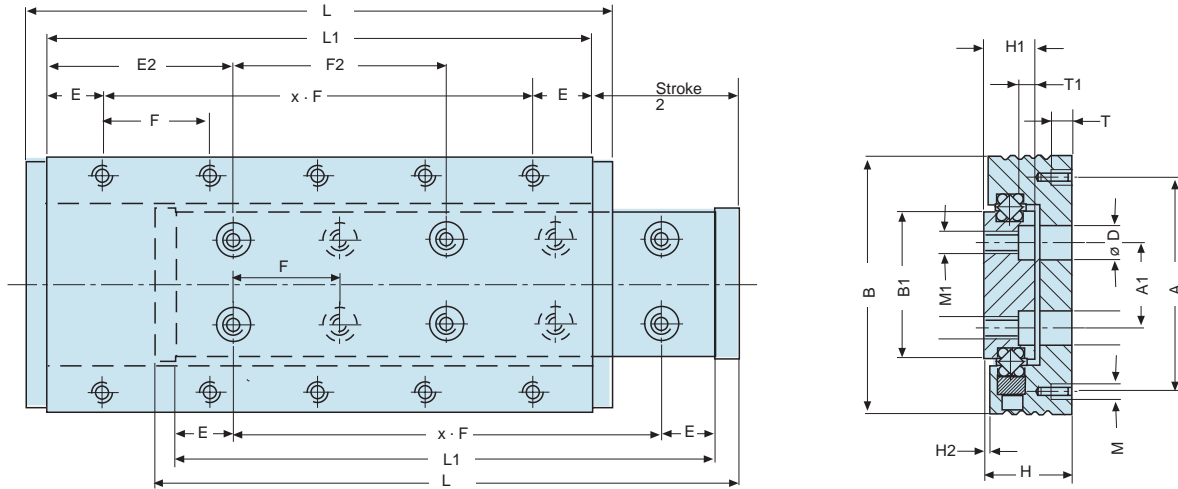


Stroke	Length	Width	Height	Load rating	Moments			Number													Weight	Order number	
					MCX	MCY	MCZ	A1	B1	L1	M1	T1	A	H1	E2	F2	M	T	D	E			H2
15	55	40	15	1410	14	13	-	18	45	M5	4,5	32	10	10,0	25	M4	4	8	10,0	0,3	1x25	0,1	86000A
25	55	40	15	1410	14	13	-	18	45	M5	4,5	32	10	10,0	25	M4	4	8	10,0	0,3	1x25	0,1	86001A
25	80	40	15	1880	19	22	-	18	70	M5	4,5	32	10	22,5	25	M4	4	8	10,0	0,3	2x25	0,1	86002A
50	80	40	15	1410	14	13	-	18	70	M5	4,5	32	10	22,5	25	M4	4	8	10,0	0,3	2x25	0,2	86003A
25	110	40	15	2820	28	46	-	18	100	M5	4,5	32	10	25,0	50	M4	4	8	12,5	0,3	3x25	0,2	86004A
50	110	40	15	2350	23	33	-	18	100	M5	4,5	32	10	25,0	50	M4	4	8	12,5	0,3	3x25	0,2	86005A
25	80	60	20	1880	34	22	20	34	70	M5	4,5	50	12	22,5	25	M4	6	8	10,0	0,5	2x25	0,3	86006A
50	80	60	20	1410	25	13	20	34	70	M5	4,5	50	12	22,5	25	M4	6	8	10,0	0,5	2x25	0,3	86007A
25	110	60	20	2820	51	46	20	34	100	M5	4,5	50	12	25,0	50	M4	6	8	12,5	0,5	3x25	0,3	86008A
50	110	60	20	2350	42	33	20	34	100	M5	4,5	50	12	25,0	50	M4	6	8	12,5	0,5	3x25	0,3	86009A
75	110	60	20	1880	34	22	20	34	100	M5	4,5	50	12	25,0	50	M4	6	8	12,5	0,5	3x25	0,3	86010A
50	135	60	20	3290	59	61	20	34	125	M5	4,5	50	12	62,5	-	M4	6	8	12,5	0,5	4x25	0,4	86011A
75	135	60	20	2820	51	46	20	34	125	M5	4,5	50	12	62,5	-	M4	6	8	12,5	0,5	4x25	0,4	86012A
100	135	60	20	2350	42	33	20	34	125	M5	4,5	50	12	62,5	-	M4	6	8	12,5	0,5	4x25	0,4	86013A
75	160	60	20	3290	59	61	20	34	150	M5	4,5	50	12	75,0	-	M4	6	8	15,0	0,5	4x30	0,5	86014A
100	160	60	20	3290	59	61	20	34	150	M5	4,5	50	12	75,0	-	M4	6	8	15,0	0,5	4x30	0,5	86015A
50	135	80	25	3290	86	61	35	50	125	M5	4,5	65	16	62,5	-	M4	6	8	12,5	0,5	4x25	0,7	86016A
75	135	80	25	2820	73	46	35	50	125	M5	4,5	65	16	62,5	-	M4	6	8	12,5	0,5	4x25	0,7	86017A
100	135	80	25	2350	61	33	35	50	125	M5	4,5	65	16	62,5	-	M4	6	8	12,5	0,5	4x25	0,7	86018A
75	160	80	25	3290	86	61	35	50	150	M5	4,5	65	16	75,0	-	M4	6	8	15,0	0,5	4x30	0,8	86019A
100	160	80	25	3290	86	61	35	50	150	M5	4,5	65	16	75,0	-	M4	6	8	15,0	0,5	4x30	0,8	86020A
100	185	80	25	3760	98	79	35	50	175	M5	4,5	65	16	102,5	-	M4	6	8	12,5	0,5	5x30	1,0	86021A
125	185	80	25	3290	86	61	35	50	175	M5	4,5	65	16	102,5	-	M4	6	8	12,5	0,5	5x30	1,0	86022A
100	195	100	30	8880	297	200	45	64	175	M8	6,5	85	19	87,5	-	M6	9	11	17,5	1,0	4x35	1,5	86023A
125	195	100	30	7770	260	155	45	64	175	M8	6,5	85	19	87,5	-	M6	9	11	17,5	1,0	4x35	1,5	86024A
125	220	100	30	9990	335	250	45	64	200	M8	6,5	85	19	100,0	-	M6	9	11	20,0	1,0	4x40	1,7	86025A
150	220	100	30	8880	297	200	45	64	200	M8	6,5	85	19	100,0	-	M6	9	11	20,0	1,0	4x40	1,7	86026A

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]


Open roller table for jigs and fixtures and reference gauges. Suitable for adjustment and compensation movements in the mounting and measuring technique.

**Running accuracy:**  
0,004 - 0,006 mm

# Sliding tables

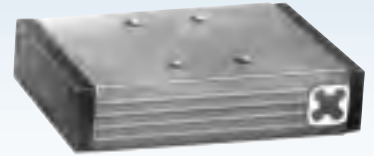

## Series TFR...G

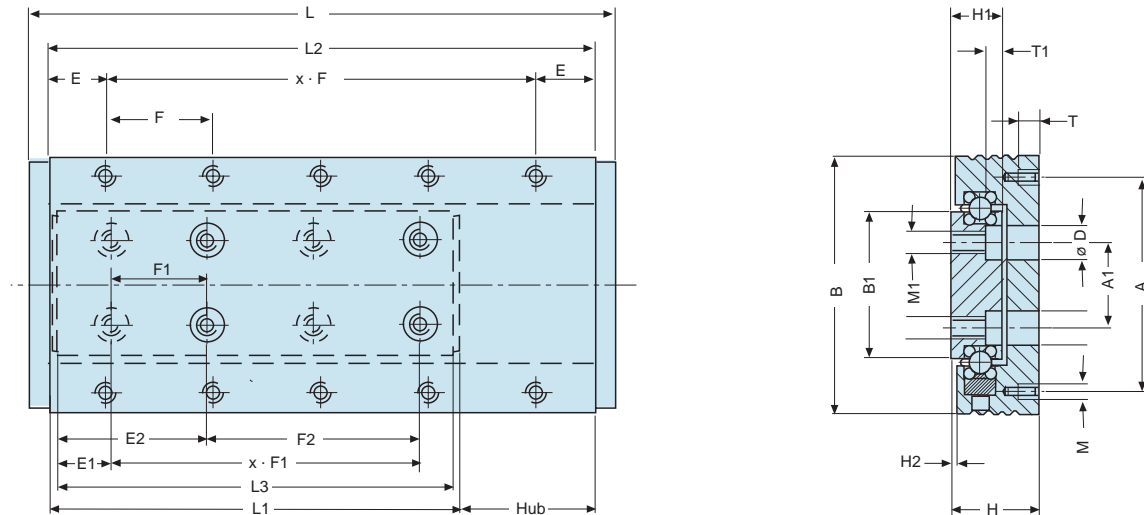

Stroke	Length L	Width B	Height H	Load rating C	Moments			A1	B1	E1	L3	L1	M1	T1	A	E	H1	E2	F2	L2	M	T	D	H2	x · F	x · F1	Number	Weight Alu	Order number
					$M_{cx}$	$M_{cy}$	$M_{cz}$																						
15	85	60	20	2240	40	21	20	34	10,0	55	59	M5	4,5	50	12,5	12	27,5	35	75	M4	6	8	0,5	2x25	1x35	0,3	<a href="#">86033A</a>		
25	135	60	20	3920	70	63	20	34	10,0	95	99	M5	4,5	50	12,5	12	37,5	50	125	M4	6	8	0,5	4x25	3x25	0,4	<a href="#">86037A</a>		
50	185	80	25	5040	131	103	35	50	10,0	120	124	M5	4,5	65	12,5	16	62,5	50	175	M4	6	8	0,5	6x25	4x25	0,9	<a href="#">86043A</a>		
50	220	150	35	14250	805	341	90	110	21,0	142	150	M8	6,5	130	25,0	21	75,0	50	200	M6	9	11	1,0	3x50	2x50	2,8	<a href="#">86053A</a>		
100	320	150	35	19950	1127	658	90	110	21,0	192	200	M8	6,5	130	25,0	21	125,0	100	300	M6	9	11	1,0	5x50	3x50	3,9	<a href="#">86055A</a>		

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body
- Franke 4-point system

### Features:

- for high loads from all directions
- highest accuracy
- compact design

### Spindle:

- preloaded ball screw spindle, (pitch see table)
- other spindles on request

### Running accuracy:

- 0,004 to 0,01mm

### Fastening:

- standard bore shape on both sides
- the table can be mounted upside down

### Load capacity:

- see loads and moments in the tabel

### Operation temperature:

- 0° to +70°C

### Mounting position:

- optional

### Lubrication:

- by lubricating the ball cages (see page 98)

### Tolerances:

- all dimensions DIN7168 medium
- height DIN7168 fine

### Traverse speed:

- max. 1,5m/s

### Adjustment:

- free from clearance ex works
- adjustable by threaded bolts

### Material:


- table body made of aluminium
- raceways made of high alloy spring steel
- balls made of steel



# Cross tables



## Series TFR...K

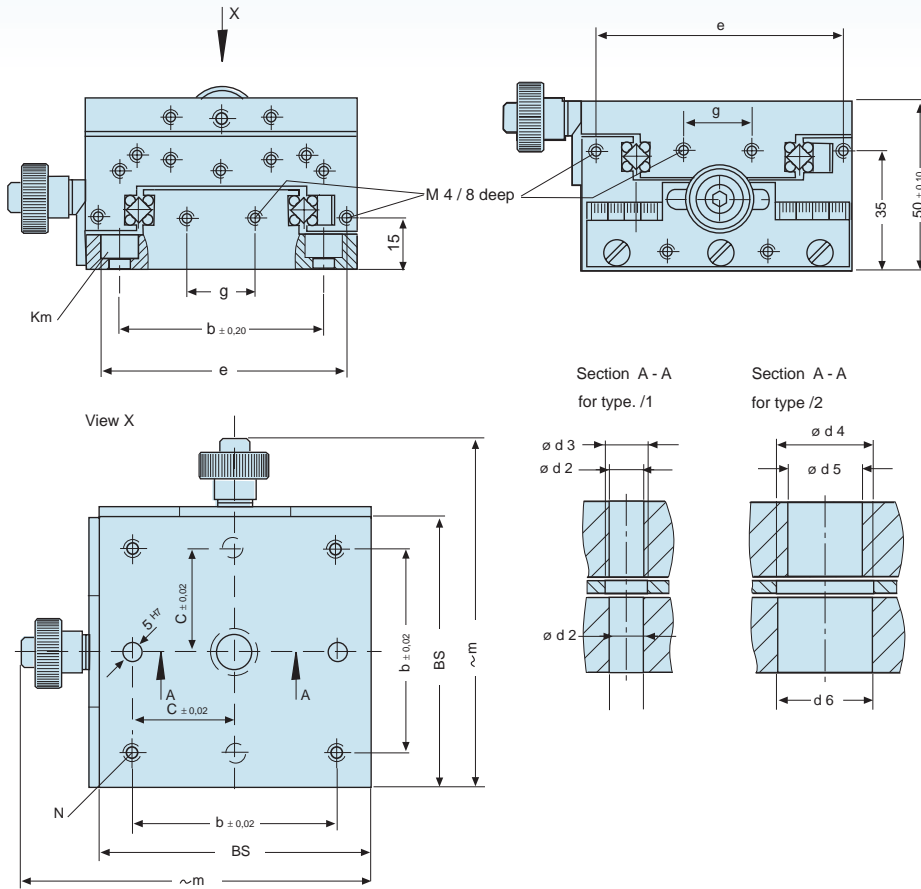

Stroke	Width		Load rating	Moments				Counters. DIN74							Weight Alu	Order number			
	BS	C		MCX	MCY, MCZ	b	c	d2H7	d3	d4	d5H7	d6	e	g		m	N	km	Vers. 1
24	60	130	1	1	40	20	8	10,0	-	-	-	52	-	78	M5	Km5	0,550	86200C	-
24	80	170	1,6	1,6	60	30	10	12,5	28	22	28	72	20	98	M6	Km6	0,980	86201C	86201D
44	100	220	2,6	2,6	80	40	10	12,5	46	40	46	92	30	118	M6	Km6	1,530	86202C	86202D

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body
- Franke 4-point system
- scale and clamp

### Features:

- for high loads from all directions
- highest accuracy
- clamping by screws

### Running accuracy:

- 0,005 to 0,01 mm

### Fastening:

- lower part countersunk
- upper part tapped holes

### Load capacity:

- see loads and moments in the tabel

### Operation temperature:

- 0° to +70°C

### Mounting position:

- optional

### Clamping:

- by screws on the scale plates

### Scale:

- 1mm

### Lubrication:

- by lubricating the ball cages (see page 98)

### Adjustment:

- free from clearance ex works
- adjustable by threaded bolts

### Material:


- table body made of aluminium
- raceways made of high alloy spring steel
- balls made of steel

# Sliding tables



## Serie TFR...S

with spindle

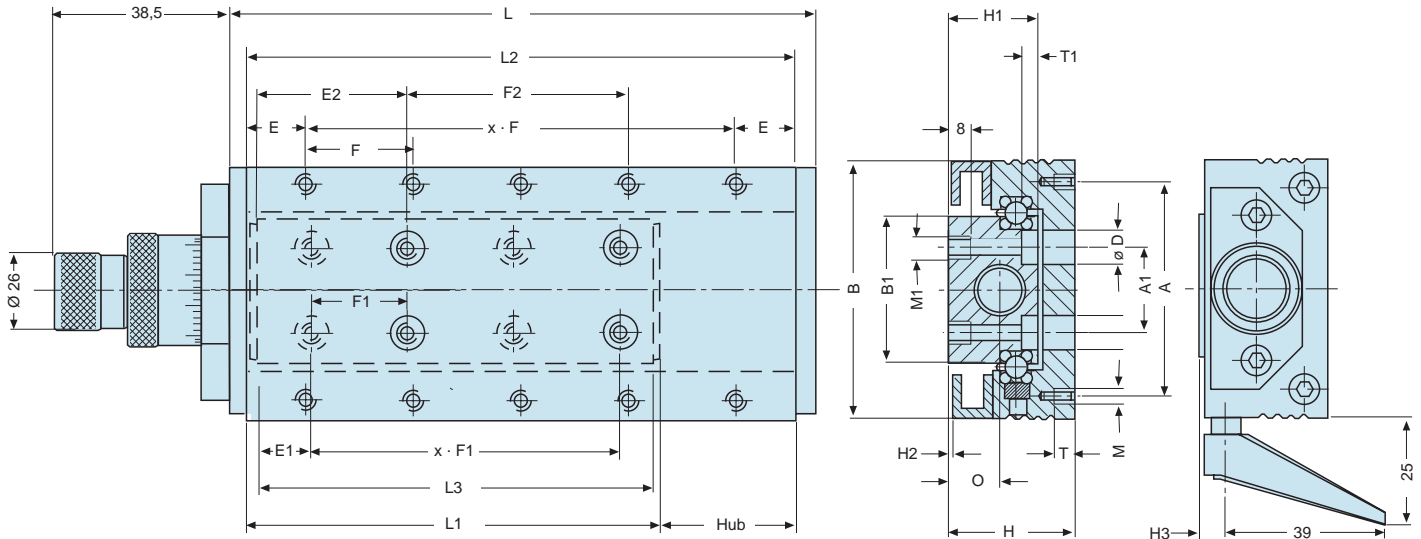

Stroke	Length L	Width B	Height H	Load rating C	Moments																			Number	Weight Alu	Order number				
					$M_{cx}$	$M_{cy}$	$M_{cz}$	A1	B1	E1	L3	L1	M1	T1	A	E	L2	M	T	D	H1	E2	H3				F2	O	H2	x · F
15	87	60	30	2240	40	21		20	34	10,0	55	60	M5	4,5	50	12,5	75	M4	6	8	22	27,5	5,5	35	14	0,5	2,25	1,35	0,5	86057A
25	112	60	30	2800	50	33		20	34	10,0	70	75	M5	4,5	50	12,5	100	M4	6	8	22	37,5	5,5	25	14	0,5	3,25	2,25	0,6	86059A
50	187	80	35	5040	131	103		35	50	10,0	120	125	M5	4,5	65	17,5	175	M4	6	8	26	62,5	5,5	50	16	0,5	4,35	4,25	1,2	86065A
50	216	150	45	14250	805	341		90	110	21,0	142	150	M8	6,5	130	25,0	200	M6	9	11	31	75,0	6,0	50	16	1,0	3,50	2,50	3,7	86072A
100	316	150	45	19950	1127	658		90	110	21,0	192	200	M8	6,5	130	25,0	300	M6	9	11	31	125,0	6,0	100	16	1,0	5,50	3,50	4,8	86073A

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body
- Franke 4-point system
- spindle, scale and clamp

### Features:

- for high loads from all directions
- highest accuracy
- precise spindle drive

### Running accuracy:

- 0,004 to 0,006mm

### Fastening:

- standardized holes in the upper and lower part
- fixation either from above or from below

### Load capacity:

- see loads and moments in the tabel

### Operation temperature:

- 0° to +70°C

### Mounting position:

- optional

### Clamping:

- Our clamping device for the location of the movable part is designed in such a manner that the antifriction guide is not loaded. Where the clamping device is desired the order number should read **No. ...B.**

### Scale:

- 0,02 mm

### Lubrication:

- by lubricating the ball cages (see page 98)

### Spindle pitch:

- 1,00 mm

### Spindle precision:

- $\leq \pm 0,03/300$  mm Stroke

### Adjustment:

- free from clearance ex works
- adjustable by threaded bolts


### Tolerances:

- all dimensions DIN7168 medium
- heigh DIN7168 fine

### Material:

table body: made of aluminium  
 raceways: made of high alloy spring steel  
 balls: made of steel



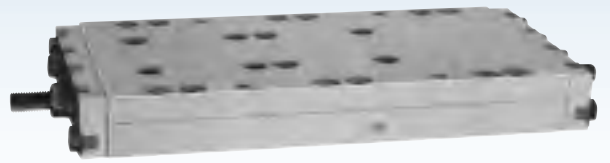

## TFS08B

Stroke	Load rating	Main dimensions		Other dimensions										Moments			Order number										
		Length C	Width BS	BA	BB	BF	LF	LS	Bore distances in slider part					Guide part					M <sub>Cx</sub>	M <sub>Cy</sub>	M <sub>Cz</sub>						
									(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)		(9)				(1)	(2)	(3)	(4)	(5)	
30	34500	350	110	93	17	50,8	262,5	320	20	60	20	60	20	60	20	-	-	-50,0	50,0	22,5	50,0	50,0	948	1517	89003C		
	34500	350	150	133	57	90,8	262,5	320	20	60	20	60	20	60	20	-	-	-50,0	50,0	22,5	50,0	50,0	1638	1517	89008C		
55	27000	310	110	93	17	50,8	200,0	280	20	80	20	80	20	-	-	-	-	-50,0	60,0	50,0	-	-	742	940	89001C		
70	30000	350	150	133	57	90,8	225,0	320	20	60	20	60	20	60	20	-	-	-50,0	50,0	35,0	50,0	-	-	1425	1154	89009C	
85	33000	390	110	93	17	50,8	250,0	360	20	60	20	80	20	80	20	-	-	-50,0	50,0	60,0	50,0	-	-	907	1391	89014C	
	33000	390	150	133	57	90,8	250,0	360	20	60	20	80	20	80	20	-	-	-50,0	50,0	60,0	50,0	-	-	1567	1391	89019C	
105	25500	350	110	93	17	50,8	187,5	320	20	60	20	60	20	60	20	-	-	-50,0	47,5	50,0	-	-	-	701	841	89006C	
	25500	350	150	133	57	90,8	187,5	320	20	60	20	60	20	60	20	-	-	-50,0	47,5	50,0	-	-	-	1211	841	89011C	
135	27000	390	110	93	17	50,8	200,0	360	20	60	20	80	20	80	20	-	-	-50,0	60,0	65,0	-	-	-	742	940	89016C	
	27000	390	150	133	57	90,8	200,0	360	20	60	20	80	20	80	20	-	-	-50,0	60,0	65,0	-	-	-	1282	940	89021C	
185	25500	430	110	93	17	50,8	187,5	400	20	60	20	60	20	60	20	60	20	60	20	50,0	47,5	50,0	-	-	701	841	89030C
	25500	430	200	133	107	140,8	187,5	400	20	60	20	60	20	60	20	60	20	60	20	50,0	47,5	50,0	-	-	1848	841	89039C

## TFS12B

Stroke	Load rating	Main dimensions		Other dimensions										Moments			Order number										
		Length C	Width BS	BA	BB	BF	LF	LS	u	Bore distances in slider part					Guide part					M <sub>Cx</sub>	M <sub>Cy</sub>	M <sub>Cz</sub>					
										(1)	(2)	(3)	(4)	(5)	(6)	(7)		(8)	(9)				(1)	(2)	(3)	(4)	(5)
45	108000	490	130	109	21	59,8	378	450	-	25	75	25	100	25	100	25	-	-	80	80	88	80	-	-	3510	6974	89122C
	108000	490	220	199	111	149,8	378	450	-	25	75	25	100	25	100	25	-	-	80	80	88	80	-	-	8370	6974	89131C
55	58500	340	130	109	21	59,8	216	300	-	25	75	25	75	25	-	-	-	-	80	86	-	-	-	-	1901	2115	89100C
	58500	340	180	159	71	109,8	216	300	-	25	75	25	75	25	-	-	-	-	80	86	-	-	-	-	3363	2115	89107C
85	81000	440	130	109	21	59,8	288	400	-	25	75	25	75	25	75	25	-	-	80	78	80	-	-	-	2632	3975	89109C
	81000	440	220	199	111	149,8	288	400	-	25	75	25	75	25	75	25	-	-	80	78	80	-	-	-	6277	3975	89116C
110	103500	540	130	109	21	59,8	360	500	-	25	75	25	75	25	75	25	75	25	80	80	70	80	-	-	3363	6416	89142C
	103500	540	220	199	111	149,8	360	500	-	25	75	25	75	25	75	25	75	25	80	80	70	80	-	-	8021	6416	89154C
125	112500	590	130	109	21	59,8	396	550 137,5	25	75	25	100	25	100	25	75	25	80	80	26	80	80	80	80	3656	7556	89164C
	112500	590	300	279	191	229,8	396	550 137,5	25	75	25	100	25	100	25	75	25	80	80	26	80	80	80	13218	7556	89172C	
180	99000	590	130	109	21	59,8	342	550 137,5	25	75	25	100	25	100	25	75	25	80	80	52	80	-	-	-	3217	5882	89166C
	99000	590	300	279	191	229,8	342	550 137,5	25	75	25	100	25	100	25	75	25	80	80	52	80	-	-	-	11632	5882	89174C
220	72000	540	130	109	21	59,8	252	500	-	25	75	25	75	25	75	25	75	25	80	42	80	-	-	-	2340	3161	89148C
	72000	540	220	199	111	149,8	252	500	-	25	75	25	75	25	75	25	75	25	80	42	80	-	-	-	5580	3161	89160C
255	76500	590	300	279	191	229,8	270	550 137,5	25	75	25	100	25	100	25	75	25	80	60	80	-	-	-	-	8988	3557	89176C


## TFS16B

Stroke	Load rating	Main dimensions		Other dimensions										Moments			Order number												
		Length C	Width BS	BA	BB	BF	LF	LS	u	Bore distances in slider part					Guide part						M <sub>Cx</sub>	M <sub>Cy</sub>	M <sub>Cz</sub>						
										(1)	(2)	(3)	(4)	(5)	(6)	(7)		(8)	(9)	(10)				(11)	(12)	(13)	(1)	(2)	(3)
40	248000	740	160	136	24	73,1	625	700 200,0	25	75	25	75	25	75	25	75	25	75	25	80	80	80	95	80	809920	26453	89246C		
	248000	740	300	276	164	213,1	625	700 200,0	25	75	25	75	25	75	25	75	25	75	25	80	80	80	95	80	8027280	26453	89257C		
65	136000	490	160	136	24	73,1	350	450	-	25	75	25	100	25	100	25	-	-	-	80	80	60	80	-	-	5440	8160	89200C	
	216000	690	300	276	164	213,1	550	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	80	100	80	8023760	20159	89237C	
90	144000	540	160	136	24	73,1	375	500	-	25	75	25	75	25	75	25	-	-	-	80	80	85	80	-	-	5760	9120	89202C	
	224000	740	300	276	164	213,1	575	700 200,0	25	75	25	75	25	75	25	75	25	75	25	80	80	45	80	80	8024640	21653	89258C		
115	160000	590	160	136	24	73,1	400	550 137,5	25	75	25	100	25	100	25	75	25	-	-	-	80	80	30	80	80	-6400	11199	89207C	
	200000	690	300	276	164	213,1	500	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	50	80	8022000	17333	89238C		
140	168000	640	160	136	24	73,1	425	600 200,0	25	75	25	75	25	75	25	75	25	-	-	-	80	80	55	80	80	-6720	12319	89218C	
	208000	740	300	276	164	213,1	525	700 200,0	25	75	25	75	25	75	25	75	25	75	25	80	80	75	80	80	8022880	18720	89260C		
165	136000	590	160	136	24	73,1	350	550 137,5	25	75	25	100	25	100	25	75	25	-	-	-	80	80	60	80	-	-	5440	8160	89209C
	176000	690	300	276	164	213,1	450	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	80	80	80	-19360	13493	89240C	
215	160000	690	160	136	24	73,1	400	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	30	80	80	-6400	11199	89233C	
	160000	690	300	276	164	213,1	400	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	30	80	80	-17600	11199	89242C	
265	136000	690	160	136	24	73,1	350	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	60	80	-	-	5440	8160	89235C
	136000	690	300	276	164	213,1	350	650 237,5	25	75	25	75	25	100	25	100	25	75	25	-	80	80	60	80	-	-	14960	8160	89244C





## Series TSD...M

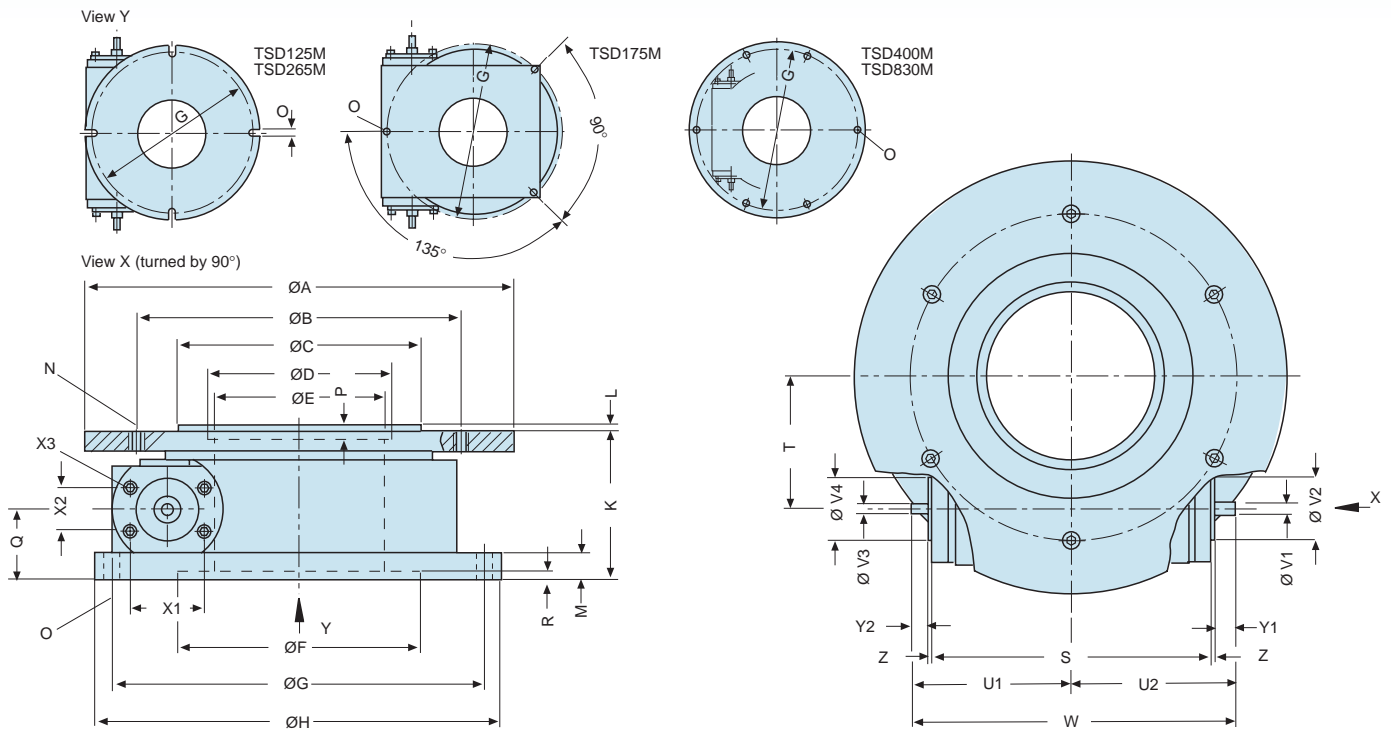

Nom. Ø	Load rating	Kipp moment														Weight	Order number												
A	C <sub>0</sub>	C <sub>DM</sub>	A	B	C <sup>g6</sup>	D <sup>H7</sup>	E	F <sup>H7</sup>	G	H	K	L	M	N	O	P	Q	R	S	T	U1	U2	V <sub>1</sub> <sup>g6</sup>	V <sub>2</sub> <sup>g6</sup>	V <sub>3</sub> <sup>g6</sup>	V <sub>4</sub> <sup>g6</sup>	W		
125	1950	110	125	100	-	70	70	100	150	165	75	-	10	4xM5	4x7,0	5	34	14	112	60	67,5	67,5	6	22	6	22	135	3	91042A
175	2550	140	175	126	-	102	70	102	178	-	82	-	12	6xM6	3x6,6	4	31	4	152	63	98,0	98,0	6	52	6	52	196	6	91043A
265	4200	310	265	200	150	-	105	150	230	250	90	4	16	6xM10	4x10,0	-	43	4	171	81	95,0	98,0	8	38	6	38	193	10	91044A
400	14100	1780	400	340	300	200	190	270	380	400	100	4	16	6xM10	6x11,0	5	43	5	229	139	124,0	127,0	8	38	6	38	251	27	91045A
830	57000	19050	830	740	720	-	550	670	812	840	155	5	25	24xM8	8x14,0	-	69	6	395	358	215,0	225,0	16	55	10	55	440	150	91046A
830	57000	19050	830	740	720	-	550	670	812	840	155	5	25	24xM8	8x14,0	-	69	6	419	358	248,5	272,5	24	55	10	55	536	150	91303D
Size	X <sub>1</sub>	X <sub>2</sub>	X <sub>3</sub>	Y <sub>1</sub>	Y <sub>2</sub>	Z	Transmission	N max. [U/min]	Nominal-Ø [mm]										125	175	265	400	830						
			2 x M4/ 8 tief																										
125	21,8	26,0	2 x M4/16 tief	8,0	9,0	2,8	360 : 1	7	Radial / axial accuracy										µm	20	20	20	30	50					
175	50,0	32,0	4 x M4/13 tief	18,0	18,0	4,0	360 : 1	7	Positioning accuracy										" +/-	40	40	35	25	15					
265	45,0	26,0	4 x M5/24 tief	10,0	7,0	2,5	360 : 1	7	Repetitive accuracy										" +/-	8	7	5	4	3					
400	45,0	26,0	4 x M5/24 tief	9,0	6,0	2,5	360 : 1	7	Max. input torque										Nm	0,7	0,9	1,5	2	4,5					
830	49,6	49,6	4 x M6/32 tief	23,5	13,5	4,0	360 : 1	7	Max. output torque										Nm	70	75	160	290	970					
830	49,6	49,6	4 x M6/32 tief	85,0	17,0	4,0	120 : 1	7																					

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body with metal cover
- High precision worm drive

### Features:

- Light and compact design
- High stiffness
- High accuracy
- Center-free construction

### Load capacity:

- see load rating in the table. For best accuracy und lifetime we recommend a static safety of  $S \geq 3$ . We are gladly prepared to calculate the load situation of your application for you.

### Adjustment:

- Antifriction bearing and precision worm gear are adjusted without clearance.

### Lubrication:

- with bearing grease according to our maintenance instructions

### Options:


- 1 or 2 limit switches inside the table body with free adjustable control cams
- mounting flanges for special motors
- stepping or servo motors according to your application
- resolver placed on the other end of the gear shaft
- complete positioning systems including Franke CNC-control units and software (1-8 axes), see page 90-91. Please consult us.

### Material:

Table body: aluminium  
 Raceways: high alloy spring steel  
 Balls: steel  
 Worm gear: steel-bronze  
 Vacuum and partly non-magnetic version on request




# Rotary tables



## Series TSD...S

View X (turned by 90°)

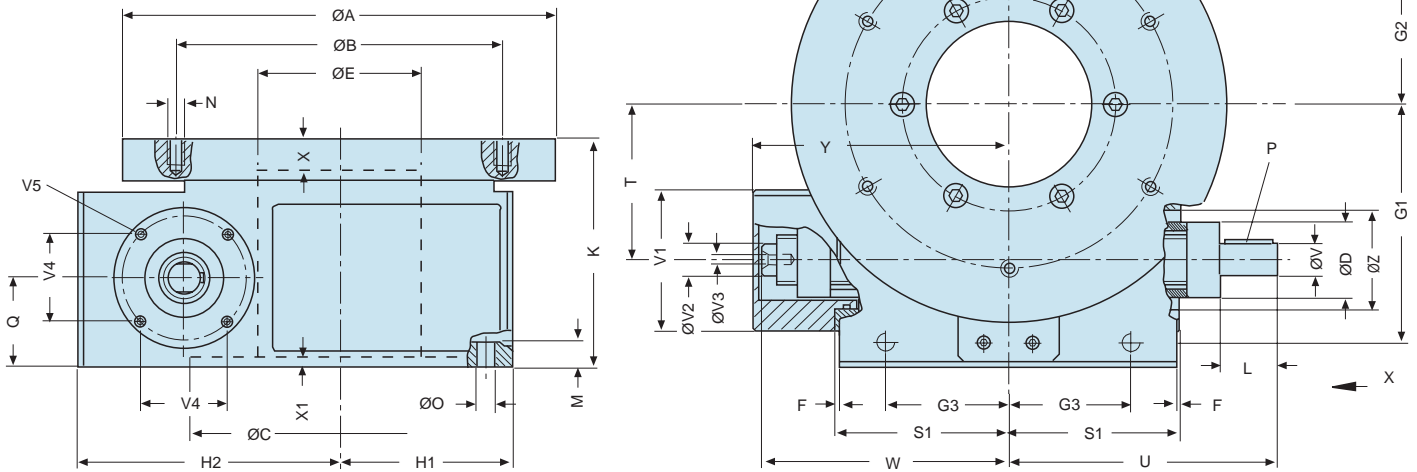

Nom. Ø	Load rating	Kipp-rating momente																Weight	Order number
A	C <sub>0A</sub>	C <sub>0M</sub>	A	B	C <sup>H7</sup>	D	E <sup>H7</sup>	F	G1	G2	G3	H1	H2	K	L	M	N		
175	2500	75	175	126	-	40	40	-	89	79	58	94	104	110	35	81*	M6,10 tief	9	91186A
265	7800	610	265	200	198	48	100	2	145	90	75	106	160	138	35	15	M10,15 tief	22	91187G
400	16000	2000	400	340	206	62	200	4	235	155	135	175	255	165	55	25	M10,15 tief	48	91214A

A	Ø	Ø	P	Q	S1	T	U**	V	V1	V2	V3	V4	V5	W**	X	X'	Y	Z
Ø	Ø							Ø	□	Ø	Ø							
175	9	DIN 6885 A4 x 4x28	47	68	53	127	12j6	80	10j6/12lg.	-	47	M6,11 tief	118	5	-	124	56 <sup>H8</sup>	
265	11	DIN 6885 A6 x 6x30	54	105	95	164	19g6	85	19/ 9 lg. 6 <sup>H7</sup> /18lg.	53	M6,14 tief	151	20	6	156	60 <sup>H7</sup>		
400	14	DIN 6885 A6 x 6x45	64	170	159	246	19j6	120	26/ 8 lg. 14 <sup>H8</sup> /20lg	96	M8,16 tief	220	8	12	227	90 <sup>F8</sup>		

\* Bore through housing \*\* Dim. U and W variables for clearance setting

Transmission *	N max. [U/min.]	Nominal-Ø [mm]	175	265	400	
90 : 1	20 min <sup>-1</sup>	<b>Radial / axial accuracy</b>	µm	30	40	40
		<b>Positioning accuracy</b>	"	50	45	40
		<b>Repetitive accuracy</b>	"	8	7	6
		<b>Max. input torque</b>	Nm	1,4	4,6	8,5
		<b>Max. output drive</b>	Nm	70	270	580

\* other transmissions on request

Dimensions [mm], Weight [kg], Load rating [N], Moments [Nm]

### Consists of:

- Aluminium body with metal cover
- High precision worm drive

### Features:

- Splash water resistant
- High stiffness
- High accuracy
- Center-free construction

### Load capacity:

- see load rating in the table. For best accuracy and lifetime we recommend a static safety of S≥3. We are gladly prepared to calculate the load situation of your application for you.

### Operation temperature:

- 10° up to +80°C. Other temperatures on request.

### Adjustment:

- Antifriction bearing and precision worm gear are adjusted without clearance.

### Lubrication:

- with bearing grease according to our maintenance instructions


### Options:

- 1 or 2 limit switches inside the table body with free adjustable control cams
- mounting flanges for special motors
- stepping or servo motors according to your application
- resolver placed on the other end of the gear shaft
- complete positioning systems including Franke CNC-control units and software (1-8 axes), see page 90-91. Please consult us.

### Material:


Table body: aluminium  
 Raceways: high alloy spring steel  
 Balls: steel  
 Worm gear: steel-bronze  
 Vacuum and partly non-magnetic version on request

# Motorisation

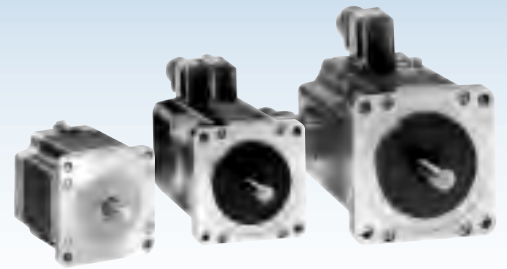

## AC-Servomotor Typ DBL.....

- Neodymium magnets for highly dynamic function
- Long life by virtue of brushless design
- Built-in Resolver
- Low motor inertia
- Vibration class N according to DIN ISO 2373
- Insulation material class F according to DIN 57530
- Protection class IP 64
- Integrated sockets for resolver and power connections
- CE-conformity

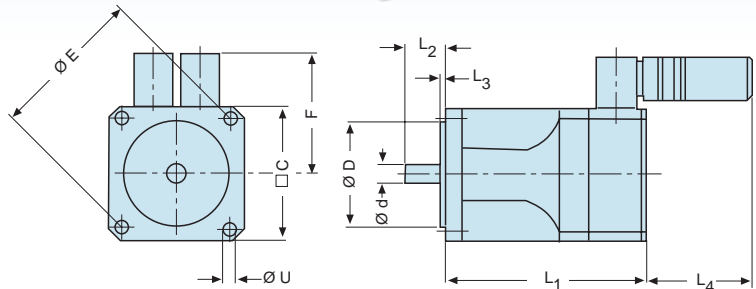

Type	Main dimensions									
	C	D <sub>16</sub>	d <sub>16</sub>	E	F	L <sub>1</sub>	L <sub>1</sub> (-G*)	L <sub>2</sub>	L <sub>3</sub>	L <sub>4</sub>

..2H00040	50	40	9	63	62,5	122	155	24	2,5	75	5,8
..2H00080	50	40	9	63	62,5	152	185	24	2,5	75	5,8
..3N00130	74	60	11	90	69,5	134	167	23	2,5	75	5,8
..4N00260	97	95	19	115	81	155	190	40	3,0	75	5,8
..4N00530	97	95	19	115	81	185	220	40	3,0	75	9,0
..4N00750	97	95	19	115	81	230	265	40	3,0	75	9,0
..5N01050	127	130	24	165	-	186	229	50	3,5	-	11,0
..5N01700	127	130	24	165	-	237	280	50	3,5	-	11,0

\*G = with brake


Dimensions [mm]

Rated speed	Cont. torque at stall	Motor inertia	Cont. current at stall	Peak current	Torque const.	Rated mains voltage	Rated Holding torque*	Oper. volt.*	Mom. of inertia	Weight	Order number
$n_n$ [min <sup>-1</sup> ]	$M_0$ [Nm]	$J$ [kgcm <sup>2</sup> ]	$I_0$ [A]	$I_{0max}$ [A]	$K$ [Nm/A]	$U_N$ [V]	$M$ [Nm]*	$U$ [VDC]*	$J$ [kgcm <sup>2</sup> ]*	$G$ [kg]	incl. Standard Brake
6000	0,4	0,08	0,93	4,30	0,43	400	1,2	24	0,07	1,1	E8022 E8023
6000	0,8	0,13	1,49	6,80	0,54	400	1,2	24	0,07	1,5	E8024 E8025
6000	1,3	0,80	1,30	7,50	0,74	400	2,5	24	0,38	2,3	E8026 E8027
3000	2,6	2,10	1,90	8,60	1,36	400	5,0	24	1,06	4,5	E8028 E8029
3000	5,3	2,80	3,20	15,00	1,65	400	5,0	24	1,06	5,7	E8030 E8031
3000	7,5	4,30	4,10	19,00	1,85	400	5,0	24	1,06	7,6	E8032 E8033
3000	10,5	8,10	6,50	30,00	1,60	400	12,0	24	3,60	9,8	E8034 E8035
3000	17,0	11,30	10,40	48,00	1,64	400	12,0	24	3,60	14,0	E8036 E8037

\* Stopbrake

## 3-Phase stepper motor Type VDRM.....LWC

- quiet and virtually resonance-free run
- resolutions from 200 up to 1000 steps/rotation
- micro-step-mode from 2000 up to 10000 steps/rotation
- insulation material class F according to DIN 57530
- Protection class IP 54
- Integrated sockets for power connections
- CE-conformity

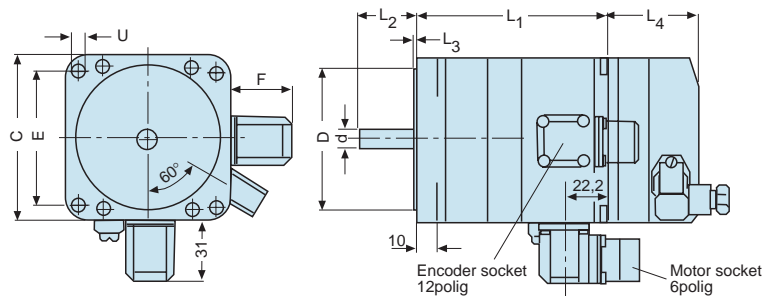

Typ	Main dimensions									
	C	D <sub>16</sub>	d <sub>16</sub>	E	F	L <sub>1</sub>	L <sub>4</sub>	L2	L3	U


.... 368	57,2	38,1	8	47,14	31	110	41,0	21	2	5,2
.... 397	85,0	60,0	12	70,00	31	110	46,5	30	2	6,5
.... 3910	85,0	60,0	12	70,00	31	140	46,5	30	2	6,5
.... 3913	85,0	60,0	14	70,00	31	170	46,5	30	2	6,5
.... 31117	110,0	56,0	19	89,00	31	180	52,7	40	3	9,0
.... 31122	110,0	56,0	19	89,00	31	228	52,7	40	3	9,0

Dimensions [mm]

Peak torque	Cont. torque at stall	Motor inertia	max. start-frequency	Cont. current at stall	Rated mains voltage	Encoder-line count	Step count	Order number*
$M_{max}$ [Nm]	$M_H$ [Nm]	$J$ [kgcm <sup>2</sup> ]	$F$ [KHz]	$I_N$ [A]	$U$ [V]			incl. Standard Brake
150	174	0,38	6,0	0,8	325	1000		E7769 E8040
200	226	1,10	5,3	1,8	325	1000		E7714 E8041
400	452	2,20	5,3	2,0	325	1000		E7593 E8042
600	678	3,30	5,3	2,3	325	1000		E7721 E8043
1200	1392	10,50	4,7	4,1	325	1000		E8038 E8044
1650	1914	16,00	4,7	4,8	325	1000	200/400/500 1000/2000/4000 5000/10000	E8039 E8045

## 2-Phase stepper motor Type VDRM...../50-L4A

- high quality motor design
- maintenance free, long life
- resolution 200 or 400 steps/rotation
- powerful technic
- insulation material class B
- CE-conformity

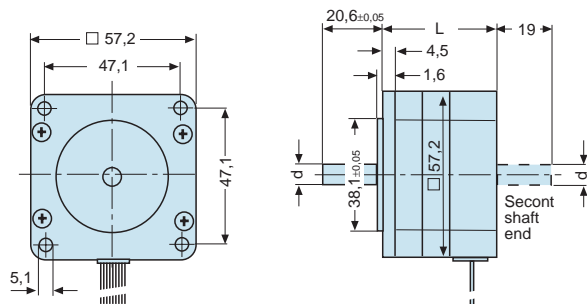

Typ	Main dimensions	
	d	L


....264	6,35	41
....266	6,35	55
....268	8,00	77

Dimensions [mm]

Peak torque	Cont. torque at stall	Motor inertia	Weight	Step count	Rated mains voltage	Encoder line count	Bestell-Nr.
$M_{max}$ [Nm]	$M_H$ [Nm]	$J$ [kgcm <sup>2</sup> ]	$M$ [kg]		$U$ [V]		
40	45	0,09	0,50	200/400	35	4	E7770
87	100	0,22	0,70	200/400	35	4	E7743
130	150	0,38	1,05	200/400	35	4	E8046

## Single axis CNC-controller Type TSC100-Servostar...

- wide range of mains supply voltage
- up to 20 Amps with integral mains filter
- all CE, UL and cUL conformities
- 2 analog inputs
- 6 digital in-/outputs
- feedback from resolver or high resolution sin/cos encoder
- integrated interface for stepper controllers
- CAN-Open intrgrated
- fully programmable RS323 interface
- Integrated position controller with memory for 180 motion tasks
- integrated interface for stepper controllers, master-slave, electrical gear, ...
- extension soccets for PROFIBUS, I/O-extension, SERCOS, ... (optional)

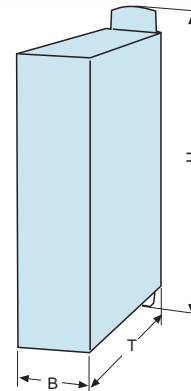


Typ	Features
<b>TSC100-Servostar 601</b>	$I_N = 1,5 \text{ A}$
<b>TSC100-Servostar 603</b>	$I_N = 3,0 \text{ A}$
<b>TSC100-Servostar 606</b>	$I_N = 6,0 \text{ A}$
<b>TSC100-Servostar 610</b>	$I_N = 10,0 \text{ A}$
Optionen:	
<b>Power supply LOGO power</b>	24VDC / 1,3 A
<b>Profibus</b>	Profibus DP expansion cards
<b>I/O-expansion card</b>	14 dig. inputs, 8dig.outputs
Cable:	
<b>Motor-/Resolver cable set</b>	5m long, protected, with soccet
<b>Motor-/Resolver cable set</b>	10m long, protected, with soccet
<b>Motor-/Resolver cable set</b>	15m lang, protected, with soccet
<b>Motor-/Resolver cable set</b>	25m long, protected, with soccet
<b>RS232-Cable</b>	Interface cable PC-TSC100
<b>Limit switch cable</b>	5m long

Rated supply voltage	Rated power supply	Rated output current	Peak output current	Dimensions			Weight	Order number
				$U_N$ [V]	$P_N$ [kVA]	$I_N$ [A]		
3 x 230V <sub>-10%</sub> ...480V <sup>+10%</sup> 50 ...60Hz	1,0	1,5	3,0	275	70	265	4,0	<a href="#">91699C</a>
	2,0	3,0	6,0	275	70	265	4,0	<a href="#">91699B</a>
	4,0	6,0	12,0	275	70	265	4,0	<a href="#">91699E</a>
	7,0	10,0	20,0	275	70	265	4,0	<a href="#">91699F</a>
								<a href="#">91703A</a>
								<a href="#">91699G</a>
								<a href="#">91699H</a>
								<a href="#">91700A</a>
								<a href="#">91700C</a>
								<a href="#">91700B</a>
								<a href="#">91700D</a>
								<a href="#">91702A</a>
								<a href="#">91701A</a>

## Single axis CNC-controller Type TSC100-Twin Line...

- integrated mains filters, cooler, ventilator
- CE, UL conformities
- fully programmable RS323 interface for PC-connection  
optional: HMI-terminal plugable on frontside  
Programming system by IEC 1131
- Programming languages: KOP, FUP, AWL,...
- integrated position controller with memory for 64 motion tasks
- point to point mode, speed mode, electrical gear  
acceleration and deceleration ramps programmable  
integrated PLC functions
- extension soccets for PROFIBUS, RS485... (optional)



Typ	Features
<b>TSC100-Twin Line TLC 611</b>	$I_N = 3,0 \text{ A}$
<b>TSC100-Twin Line TLC 612</b>	$I_N = 7,0 \text{ A}$
Optionen:	
<b>Power supply LOGO power</b>	24VDC / 1,3 A
<b>RS 485</b>	RS485-Interface module
<b>Profibus</b>	Profibus DP -module
<b>Control Tool CT</b>	PC-programming-software
Cable:	
<b>Motor cable</b>	5m long, protected, with soccet
<b>Motor cable</b>	10m long, protected, with soccet
<b>Motor cable</b>	15m long, protected, with soccet
<b>Motor cable</b>	20m long, protected, with soccet
<b>RS232- cable</b>	interface cable PC-TSC100
<b>Limit switch cable</b>	5m long


Rated supply voltage	Rated power supply	Rated supply current	Rated output current	Dimensions			Weight	Order number
				$U_N$ [V]	$P_N$ [kVA]	$I$ [A]		
1 x 230V <sub>-15%</sub> 47 ...63Hz	0,35	2,0	1,5	212,5	108	184,5	2,7	<a href="#">91690A</a>
	0,75	5,0	3,0	212,5	108	184,5	2,7	<a href="#">91690C</a>
								<a href="#">91703A</a>
								-
								-
								-
								<a href="#">91700E</a>
								<a href="#">91700F</a>
								<a href="#">91700G</a>
								<a href="#">91700H</a>
								<a href="#">91702A</a>
								<a href="#">91701A</a>

Dimensions [mm], Weight [kg]

Dimensions [mm], Weight [kg]

### Continuous path control Type TSC320 (1-3 axis)

- Continuous path control unit to control 3 power amplifiers for stepper motors or servo motors
- Up to 3 integr. amplifiers for Servo- or stepper motors
- Integrated operating panel with foil keyboard, LCD display
- Emergency power off module
- menu driven user interface (multisignal)
- Command set for program flow control, register arithmetic, text display
- Axis management with linear-, circular- and helix-interpolation
- Integrated PLC device
- Encoder interface for incremental or absolute path measuring systems
- 20 opto decoupled inputs, 32 outputs, (24VDC max. 300mA)

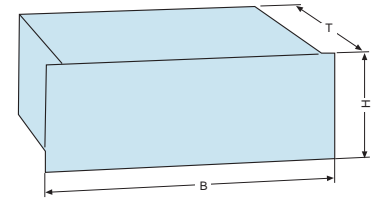

Typ	Features
TSC320-2x12/5/320R	2-axis Servo, 5A/320V
TSC320-3x12/5/320R	3-axis Servo, 5A/320V
TSC322-2x20/3/35	2-axis, 2PH-stepper motors, 3A/35V
TSC322-3x20/3/35	3-axis, 2PH-stepper motors, 3A/35V
TSC323-2x30/5.5/130	2-axis, 3PH-stepper motors, 5.5A/130V
TSC323-3x30/5.5/130	3-axis, 3PH-stepper motors, 5.5A/130V

Dimensions			Weight	Order number
Height (HE)	Width (")	Deep (mm)	(kg)	
4	19	415	10	91709A
4	19	415	12	91710A
4	19	415	10	91711A
4	19	415	12	91712A
4	19	415	10	91713A
4	19	415	12	91714A

Dimensions [mm]

### Continuous path control Type TSC400 (4-8 axis)

- Continuous path control unit to control 4 or 8 power amplifiers for stepper motors or servo motors
- Menu driven user interface with 7-inch screen or LCD-display
- Command set for program flow control, register arithmetic, text display, cutter compensation and engraving commands
- Axis management with linear-, circular- and helical-interpolation electrical gears and counter axis
- Program management on memory card 32kB to 256KB
- Integrated a PLC device (SM2) can be integrated
- Encoder interface for incremental path measuring systems
- 16 opto decoupled inputs and 8 relay outputs
- expandable up to 64 inputs and 64 outputs
- Analog voltage signal  $\pm 10V$  DC
- Clock signal and direction signal up to 30 kHz




Typ	Features
TSC420GT4-4x12/5/320R	4-axis Servo, 5A/320V
TSC422GT4-4x20/3/35	4-axis, 2PH-step.motor, 3A/35V
TSC423GT4-4x30/5.5/130	4-axis, 3PH-step.motor, 5.5A/130V
Software	
SM-Trans	comfortable data transfer PC to controller
SM-CAM	conversion program for DXF / HPGL into CNC program
Cable:	
Motor cable (2PH)	5m long, protected, with soccet
Motor cable (3PH)	5m long, protected, with soccet
Servomotor cable set	5m long, motor- und resolverkabel protected, with soccet
Servomotor cable set	10m long, motor- und resolverkabel protected, with soccet
RS232-cable	Interface cable PC-TSC
Limit switch cable	5m long

Dimensions			Weight	Order number
Height (HE)	Width (")	Deep (mm)	(kg)	
8	19	415	15	91715A
8	19	415	15	91716C
8	19	415	15	91717A
				91685A
				91685B
				91700I
				91700K
				91700L
				91700M
				91702A
				E7703


Maße [mm]

## Intermediate drive shaft

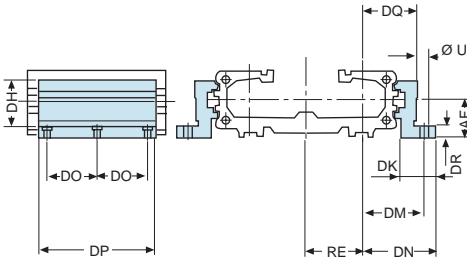


Series	Main dimensions															Order number			
	R	U	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DT	EF	EM		EN	EQ	RE
<b>MAE</b>																			
15	M5	5,5	22	27	38	26	40	47,5	40	92	34,5	8	10	41,5	28,5	49	36	26	92981A
20	M5	5,5	30	33	46	27	46	54,5	40	92	40,5	10	10	48,5	35,5	57	43	32	92982A
35	M6	7,0	48	40	71	34	59	67,0	45	112	52,0	10	11	64,0	45,0	72	57	44	92983A

## Proximity sensors profile-mounting

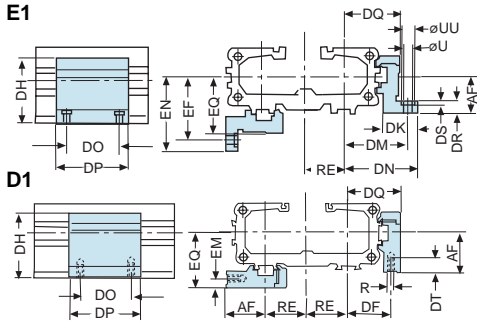


Series	Main dimensions															Order number					
	R	U	UU	AF	DF	DH	DK	DM	DN	DO	DP	DQ	DR	DS	DT		EF	EM	EN	EQ	RE
<b>E1</b>																					
15	M5	5,5	10	22	27	38	26	40	47,5	36	50	34,5	8	5,7	10	41,5	28,5	49	36	26	92821A
20	M5	5,5	10	30	33	46	27	46	54,5	36	50	40,5	10	5,7	10	48,5	35,5	57	43	32	92826A
35	M6	7,0	-	48	40	71	34	59	67,0	45	60	52,0	10	-	11	64	45	72	57	44	92831A
<b>D1</b>																					
15	M5	5,5	10	22	27	38	26	40	47,5	36	50	34,5	8	5,7	10	41,5	28,5	49	36	26	92820A
20	M5	5,5	10	30	33	46	27	46	54,5	36	50	40,5	10	5,7	10	48,5	35,5	57	43	32	92825A
35	M6	7,0	-	48	40	71	34	59	67,0	45	60	52,0	10	-	11	64	45	72	57	44	92830A

## T-nut profile

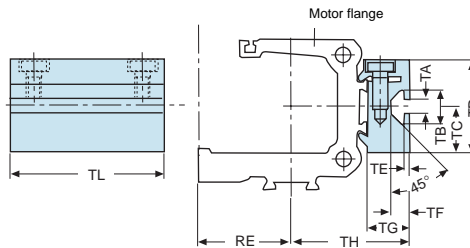


Series	Main dimensions										Order number
	RE	TA	TB	TC	TD	TE	TF	TG	TH	TL	
<b>T</b>											
15	26	5,0	11,5	16	32	1,8	6,4	14,5	34,5	50	92835A
20	32	5,0	11,5	16	32	1,8	6,4	14,5	40,5	50	92836A
35	44	8,2	20,0	20	43	4,5	12,3	20,0	58,0	80	92837A

## End cap mounting

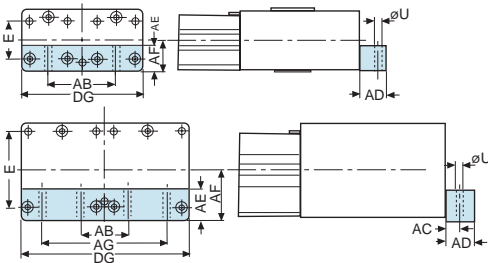

Series	Main Dimensions									Order number
	E	Ø U	AB	AC	AD	AE	AF	AG	DG	
<b>C1</b>										
15	27	6,6	52	16	25	25	22	-	91	92978A
20	36	9	64	18	25	25	30	-	114	92979A
35	70	9	48	12,5	30	30	48	128	174	92980A


## Integrated planetary gear box

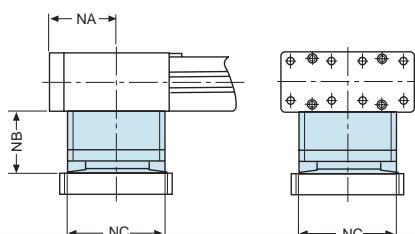


Series	Gear reduction i	Base torque Nm	Efficiency R	Reversal clearance	Nom.-incoming RPM	Max. incoming RPM	Main dimensions			Weight	Order number
							NA	NB	NC		
<b>P</b>											
15	3/5/10	< 0,14	> 97 %	< 12	3700	6000	49,0	43,0	76	2,6	92994A/B/C
20	3/5/10	< 0,51	> 97 %	< 12	3400	6000	62,0	47,0	92	4,9	92995A/B/C
35	3/5/10	< 1,50	> 97 %	< 12	2600	6000	79,5	49,5	121	9,6	92996A/B/C

# Accessories TLH


## Connection shaft

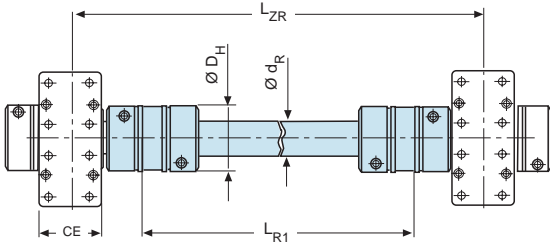


## Mid section support

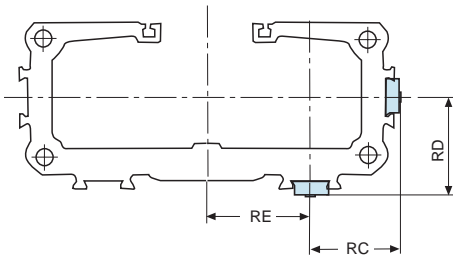


## Elect. connection Type RS

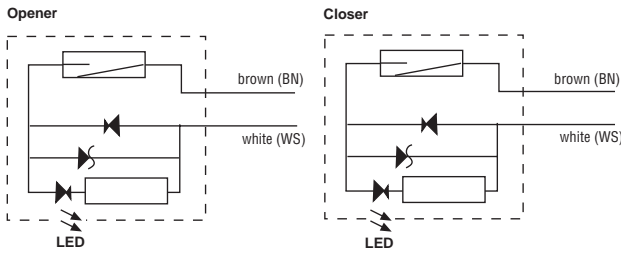



## Elect. connection Type ES

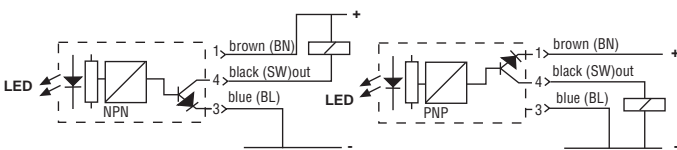

## Dimensions Typ RS-K

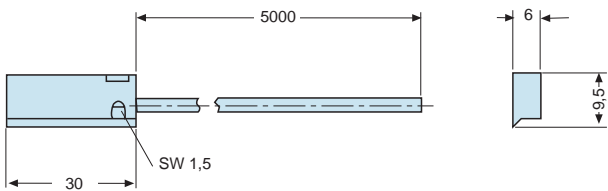

## Dimensions Typ ES-S / RS-S max 70 V

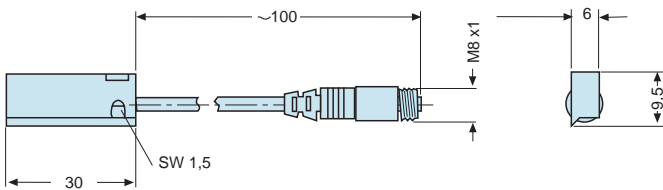

Series	Max. Moments	Main dimensions					Order number
		DH	CE	LD	L <sub>ZR</sub>	L <sub>R1</sub>	
15	60	55	42	5	<3000	L <sub>ZR</sub> -112	30x4.0 92997...
20	60	55	56	5	<3000	L <sub>ZR</sub> -126	30x4.0 92998...
35	160	65	87	5	<3000	L <sub>ZR</sub> -167	35x4.0 92999...

Dimensions [mm], Weight [kg]

Series	Dimensions			Order number			
	RC	RE	RD	RS Reed Closer	RS Reed Opener	ES PNP Closer	ES NPN Closer
15	25	26	27	Typ: RS-K	Typ: RS-K	Typ: ES-S	Typ: ES-S
20	31	32	34	92841A	92842A	92844A	92845A
35	34	44	48	92984A	92843A		

Connecting cable 5 m with plug and open end

For signal transmitter type Type ES-S/RS-S

92846A

Dimensions [mm]

For electrical sensing of the carrier position, e.g. at the end positions, proximity sensors may be fitted.

Position sensing is contactless and is based on magnets fitted as standard to the carrier. A yellow LED indicates operating status.

**Type RS:** In the type RS contact is made by a mechanical reed switch encapsulated in glass. Direct connection with 2-pole cable, 5m long, open ended (Type RS-K). With 3-pole connector M8, cable length ca. 100mm (Type RS-S).

**Type ES:** In the type ES contact is made by an electronic switch - without bounce or wear and protected from pole reversal. The output is short circuit proof and insensitive to shocks and vibrations. Connection is by 3-pole connector for easy disconnection. Fitted with connection cable 100mm long with connector.

A 5m cable with connector and open end can be ordered separately.

Codes	Sign	Unit	Remark	Type ES
Electrical codes			Typ RS	
Operating voltage	UB	V	10-244AC/DC(NO) 10-150AC/DC(NC)	10-30DC
			10-70AC/DC(DC)**	
Connecting technique			two wires	three wires
Exit function closer			normally open (NO)	PNP/Closer
Opener			normally closed (NC)	NPN/CloserMax.
perm. switching current.		mA	200	200
Max. switching capacity		VA (W)	10VA	-
Function display			LED, yellow	

Electrical Service Life, protective Measures: Magnetic switches are sensitive to excessive currents and inductions. With high switching frequencies and inductive loads such as relays, solenoid valves or lifting magnets, service life will be greatly reduced.


With resistive and capacitive loads with high switch-on current, such as light bulbs, a protective resistor should be fitted. This also applies to long cable lengths and voltages over 100V. In the switching of inductive loads such as relays, solenoid valves and lifting magnets, voltage peaks (transients) are generated which must be suppressed by protective diodes, RC loops or varistors.

# Application Examples Linear modules

## Multi-axis-support


### Adapting plate type MA1-..

for adapting of slider to slider,  
slider to profile or slider to end cap

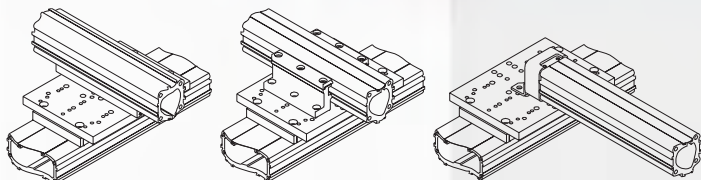


### Adapting plate type MA2-..

for adapting of slider  
to end cap


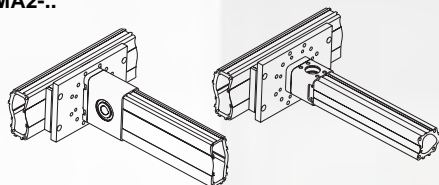


### Adapting plate type MA3-..

for adapting of slider to profile  
or slider to end cap with 90° degree angle

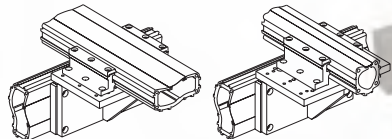


### Profil mounting type MAE-..

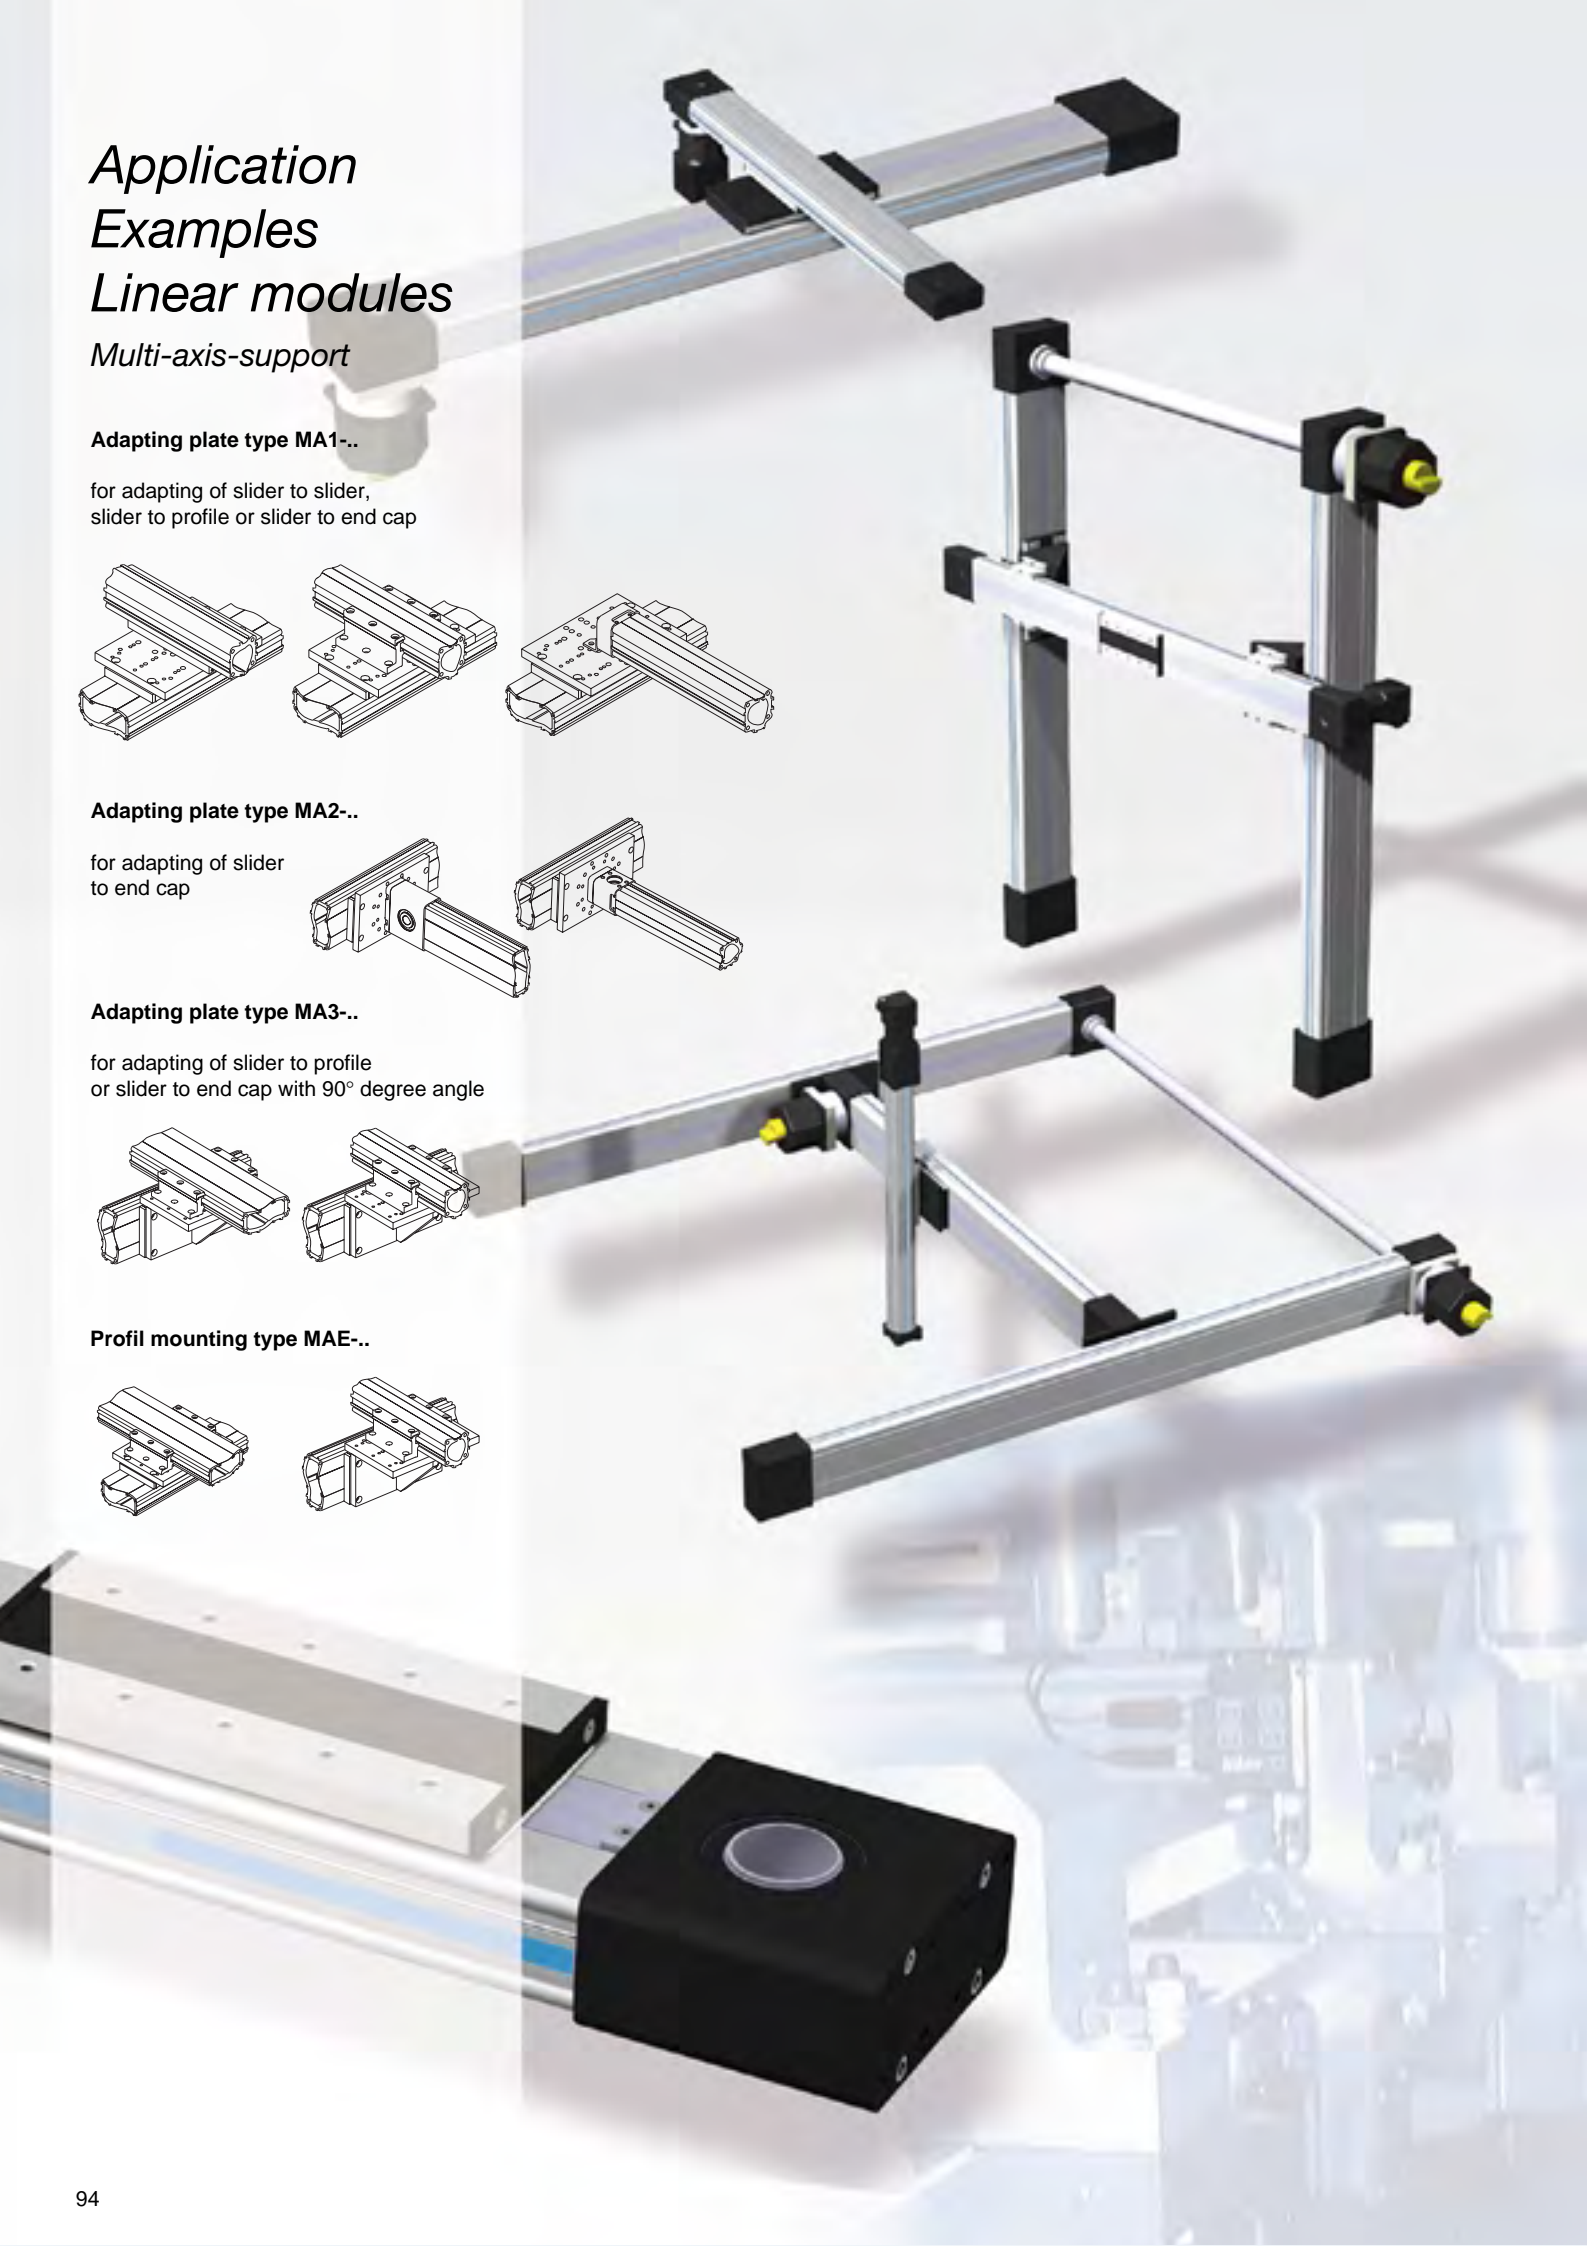


# Accessories

## Linear modules, Series TLP15 - 25

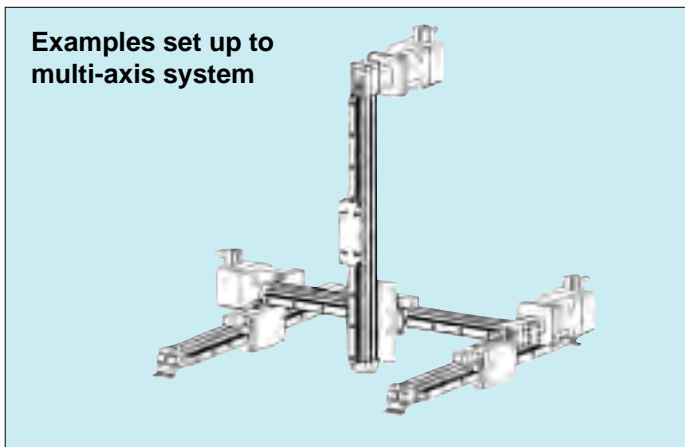

### Mounting angle

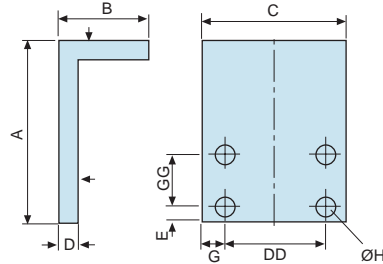

Possible combinations

X-axis Y-axis (straight)

Only with coverfastening from A2, C2; and central support from E2 without D1

Serie	A	B	C	D	E	GG	DD	G	ØH	Order number
TLP15	100	60	100	12	7	50	60	20	6,6	<a href="#">92801A</a>
TLP20	120	70	110	12	10	64	80	15	6,6	<a href="#">92802A</a>
TLP25	150	80	135	12	10	90	120	7,5	6,6	<a href="#">92803A</a>


Dimensions [mm]

### Cover fixtures, central support

At the end covers there are four inner threadings each in the front sides for fixation of the module. The distance between the holes is square so that fastening can be made either from the bottom, from top or laterally.

The cover fixtures consist of galvanized steel, the central supports are made of aluminium.

### Adapter plate



Possible combinations

Y-Achse Z-Achse









Only with coverfastening from A2, C2; and central support from E2 without D1

Serie	A	B	C	ØD	DD	GG	L	Order number
TLP15	100	325	12	6,6	60	50	112	<a href="#">92804A</a>
TLP20	110	376	15	6,6	80	64	132	<a href="#">92805A</a>
TLP25	135	463	20	6,6	120	90	164	<a href="#">92806A</a>

Dimensions [mm]

DD and GG for mounting to the y-axis

Dimensions [mm]

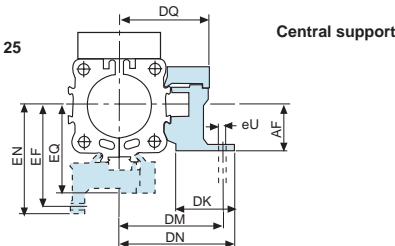

Type Series	Dim. AE				Dim. DR				Dim. AF																				
	A1	C1	E1	A1	C1	D1	E1	A1	C1	D1	E1																		
TLP15	18	-	8	22	-	22	22	27	5,8	27	16	22	2,5	39	M5	5,5	27	38	26	40	47,5	36	50	34,5	10	41,5	28,5	49	36
TLP20	20	-	10	30	-	30	30	36	6,6	36	18	26	3,0	50	M5	5,5	33	46	27	46	54,5	36	50	40,5	10	48,5	35,5	57	43
TLP25	-	30	10	-	48	48	48	70	9,0	40	12,5	24	-	86	M6	7	40	71	34	59	67	45	60	52,0	11	64	45,0	72	57

Dimensions (mm)


Cover fixtures Order number				Central support Order number			
Typ	A1	C1	D1	E1			
TLP15	<a href="#">92810A</a>	-	<a href="#">92820A</a>	<a href="#">92821A</a>			
TLP20	<a href="#">92813A</a>	-	<a href="#">92825A</a>	<a href="#">92826A</a>			
TLP25	-	<a href="#">92816A</a>	<a href="#">92830A</a>	<a href="#">92831A</a>			

## Linear modules, Series TLP15 - 25

### Motor fixtures, clutch housing


The clutch housing is the basis for the assembly of the motor. The following motor fixtures are designed for the available packets of actuators and stepping motors consisting of clutch housing, motor flange and clutch.

The motor flange can be optionally supplied without bore holes to allow any other bore configuration for other motors which might be desired by the customer.

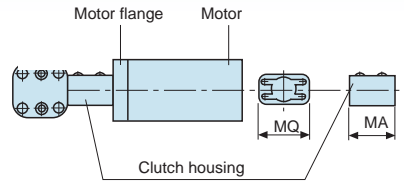

Serie	MA	MP	MQ	Order number
TLP15	47	30	40	<a href="#">92460A</a>
TLP20	49	38	49	<a href="#">92461A</a>
TLP25	76	54	65	<a href="#">92462A</a>

Dimensions [mm]

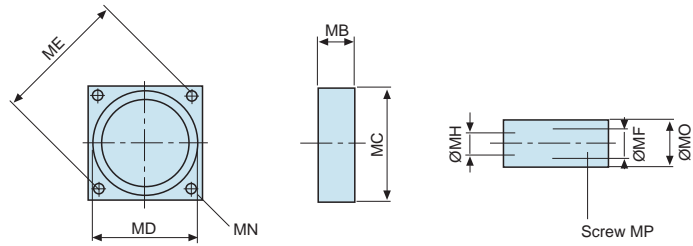


Serie	Motor	MB	MC	MD	ME	MF Motor	MH	ML	MN	MO	MP	MT [Nm]	Motor Part Nr.	Order number	
														Flange	Clutch
15	VRDM397	20	86	60	99	12	10	30	M6	22	M2,5	2,0	E7748	<a href="#">92467A</a>	<a href="#">92470A</a>
	3SM37L-4000	11	75	60	99	11	10	30	M5	20	M2,5	1,8	E7745	<a href="#">92467B</a>	<a href="#">92470B</a>
20	VRDM3910	18	86	60	99	12	10	35	M6	30	M3	4,0	E7727	<a href="#">92468A</a>	<a href="#">92471A</a>
	6SM47L-3000	15	92	80	100	14	10	35	M6	30	M3	3,0	E4746	<a href="#">92468B</a>	<a href="#">92471B</a>
35	VRDM3913	14	86	60	99	14	16	66	M6	40	M6	6,0	E7765	<a href="#">92469A</a>	<a href="#">92472A</a>
	6SM57M-3000	15	105	95	115	19	16	66	M8	40	M6	8,0	E7747	<a href="#">92469B</a>	<a href="#">92472B</a>


### Connection shaft

Serie	ML	MO	MH	DR	GL*	ZR1 Clutch
TLP15	35	30	10	15	*GL due	14ZR1
TLP20	66	40	10	20	to	19/24ZR1
TLP25	78	55	16	25	specification	24/28ZR1

Dimensions [mm]

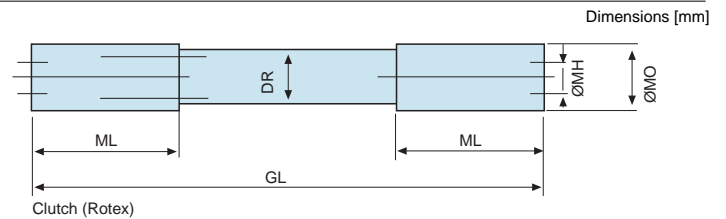

Clutch (Rotex)

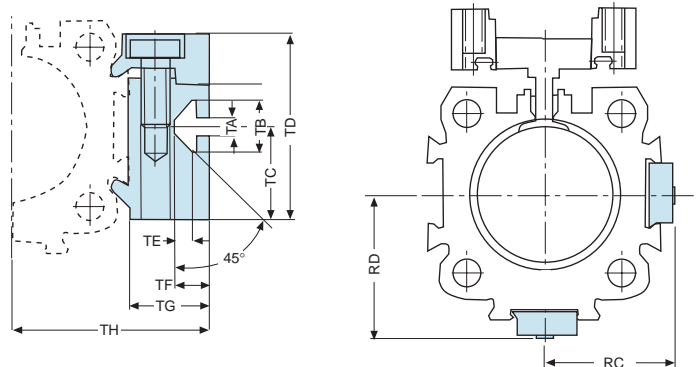

### T-groove rail

Universal fastening facility of diverse elements by means of tenon blocks.

Serie	TA	TB	TC	TD	TE	TF	TG	TH	TL	Order number	
										Standard	Stainless
TLP15	5	11,5	16	32	1,8	6,4	14,5	34,5	50	<a href="#">92835A</a>	<a href="#">92838A</a>
TLP20	5	11,5	16	32	1,8	6,4	14,5	40,5	50	<a href="#">92836A</a>	<a href="#">92839A</a>
TLP25	8,2	20,0	20	43	4,5	12,3	20,0	58,0	80	<a href="#">92837A</a>	<a href="#">92840A</a>

Dimensions [mm]

# Your application

**Company:**

**Name:**

**Department:**

**Address:**


**Telefon:**

**Telefax:**

**Email:**

**Branch:**

**Application:**  
short description

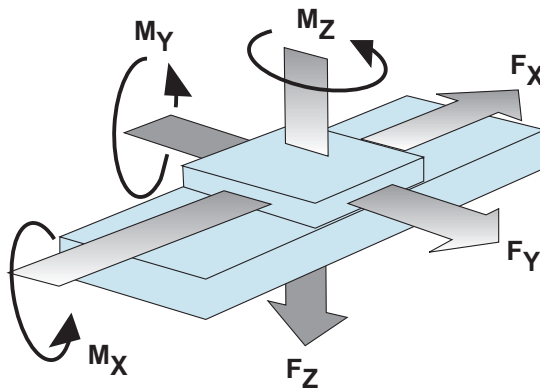

**Bestell-Nr.:** \_\_\_\_\_ **Sketch:** \_\_\_\_\_

Technical data:

Axes: \_\_\_\_\_ [Number]

Positioning accuracy: \_\_\_\_\_ [mm]

Repetitive accuracy: \_\_\_\_\_ [mm]

Speed max: \_\_\_\_\_ [m/min.]

Life (desired): L \_\_\_\_\_ [km]

With multi-axis-units we need your loads data for each table.

<b>Loads:</b>		<b>Environment:</b> (Dirt, humidity ...)
<b>Forces</b>	<b>Lever arms</b>	
$F_x =$ _____ [N]	$M_x =$ _____ [Nm]	
$F_y =$ _____ [N]	$M_y =$ _____ [Nm]	
$F_z =$ _____ [N]	$M_z =$ _____ [Nm]	

Please return the filled copy



# Technical Information

## Linear tables, rotary tables

**References switches, measuring system:** The standard version of our linear tables is equipped with inductive limit and reference switches PNP-nc 10-30 VDC. Optionally PNP-no NPN-no and NPN-nc - switches are available.

The attachment / integration of a length-measuring system with sinusoidal or rectangular signals is possible on request. Encoders can be mounted on the motor. We will be glad to consult you in finding the system appropriate for your application.

**Multi-axis units:** Franke-linear and rotary tables can easily be combined to multi-axis units. The angles and adapterplates which are necessary for the mounting of the units will be constructed according to your requirements. We deliver completely mounted units cabled and adjusted, on request with further accessories.

**Motors:** many types of stepping and servomotors can be connected with our linear and rotary tables. Flanges and clutches are to be modified respectively. The customer can contribute own motors as well.

**Motor reversal, gear:** In our standard version the motor is mounted in extension of the stroke axis. Motor reversal via toothed belt or reversal gear can be supplied for special applications e.g. with limited mounting space.

**Maintenance, lubrication:** It is indispensable to supervise the bearings in the linear and rotary tables for lubrication. Relubrication periods depend on the environmental conditions and are mainly influenced by the ageing properties of the lubricant. For longtime lubrication completely synthetic lubricants are to be preferred. In our works we use the completely synthetic special grease ISOFLEX TOPAS NCA 52 (make KLÜBER) As alternative we recommend high-grade greases of lithium soap based on of mineral oil.

Where lubricants are to be mixed up the consistency regarding kind of basic oil, thickener, basic oil viscosity and NLGI class has to be ensured. With extreme operating conditions ( vacuum, radiation, high temperatures) we recommend you to consult us or a lubricant producer.

**Franke linear tables:** Franke linear tables are almost maintenance-free. Except for the ball screw our linear tables get a lifetime lubrication in our works. Under normal operating conditions the ageing resistance of the lubricant exceeds the lifetime of the table. Ex works the ball screw is provided with a grease filling which is not a lifetime lubrication. It is a fact that some grease will leak by the ball screw shaft, therefore relubrication is necessary depending on the application. We recommend you to relubricate with about 1-2g grease after about 700 operating hours. In context with the relubrication we recommend you to check the inner space of the table and the guide paths for contamination and to clean them if possible. With this we recommend you to apply some grease to the guide paths.

**Franke rotary tables and goniometers:** Generally all standard roatary tables are provided with long time lubrication ex works. Depending on the application we recommend relubrication every 6 -12 months. The quantity for relubrication should be as follows (approximate values in g per lubricating point):

Lubrication	left	right	top	bottom	sidewise
TSD175S	1	1	3	2	-
TSD265S	1	1	3	2	-
TSD400S	1	1	4	3	-
TSD125M	-	-	-	-	3
TSD175M	-	-	-	-	3
TSD400M	-	-	-	-	4
TSD830M	-	-	-	-	4
TSW	cover teeth gaps (all sizes)				

### 1. Accuracies

**Running accuracy:** The running accuracy is defined by the highest possible deviation of an optional point on the moven table surface from the ideal straight line when traversing the total stroke distance (responding to the accuracy of the substructure). **Positioning accuracy:** The positioning accuracy is defined by the deviation from a pre-selected point which is approached by a previously defined reference (zero) point. **Repetitive accuracy:** The repetitive accuracy is defined by multiple exact approaches at a preselected point which has to be reached. For the exact repetitive approach at programmed coordinates a reliable measuring system with direct measurements is of importance. **Resolution:** The resolution is defined by the smallest possible traverse distance of a positioning unit. It is determined e.g. by the spindle pitch, transmission, stepping angle, division of the measuring system. By means of the resolution deviations in the positioning and repetitive accuracy can be neutralized. Therefore the resolution should always be higher than the deviation from the permissible positioning accuracy.

### 2. Linear tables

#### 2.1 Design

Franke linear tables are designed for the application in automation for the measuring and testing sector as well as for rationalization in handling and mounting. The selection range includes strokes from 40 mm up to 1200 mm, the movement is effected by means of a spindle. The ribbed aluminium structure in combination with the Franke guide system allows high load rating and moment loads whereas the weight is extremely low.

#### 2.2 Limit switch/reference points

Franke linear tables of series TSL06U-16M are equipped with a cam strip and continuous control cams on the outer side of the slider part. Setting of the cams according to the required reference points and changing of these points is possible without dismantling the table. The limit switches of the tables TLA and TLL are in a fixed position which is adjusted for full stroke length. Lineartables series TSL06L are equipped with moveable control cams which are placed at the right slider part underneath the side cover. To adjust the cams the side cover has to be dismantled. After adjusting the cams the fixing of the side cover fastener the cams.

### 3. Rotary Tables

Franke rotary tables are compact and have high load capacity. They are particularly used for mounting, measuring, and testing operations. The high-grade wormgear guarantees high precision in permanent operation. All rotary tables are equipped with aluminium housings, the integrated Franke guide system makes them extremely resistant to tilt while their own weight is very low. **Please make use of our mounting and maintenance instructions which come with every consignment.**

# Technical Information

## Linear modules, Series TLP15-25

### Necessary torque

The size of the linear drive and the necessary torque can be determined by using the known mass, the mounting position and the desired acceleration according to the following diagrams. The mass on which the diagrams are based is composed of the external mass and the movable mass of the linear drive.

#### Please notice:

Where an additional guide is used the mass of the slider has to be taken into account.



### Central supports

(Explanations see page 79)


From certain stroke lengths central supports are necessary to avoid deflexion and vibrations caused by the drive. The diagrams show the max. support width responding to the load. We have to make a difference between load example 1 and load example 2. Deflexion of max. 0.5mm between the supports is not permissible.

**Please observe the separate mounting and maintenance instructions which are enclosed to every consignment.**


### Load example 1




### Load example 2




### Series TLP15

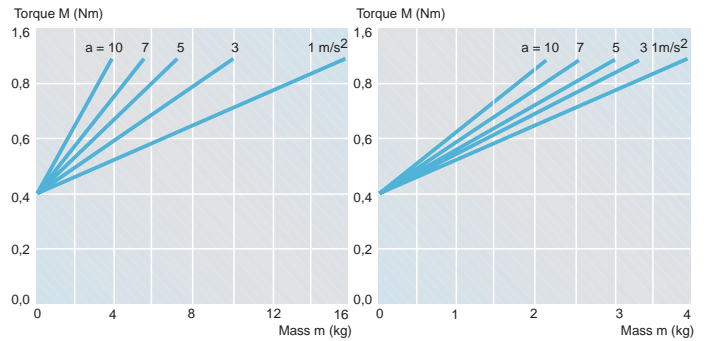


### Series TLP20

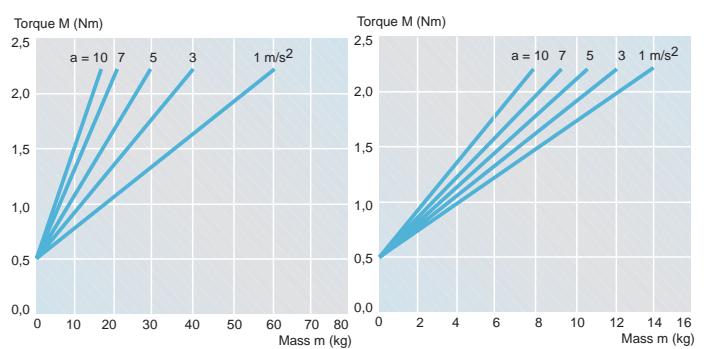

### Series TLP25

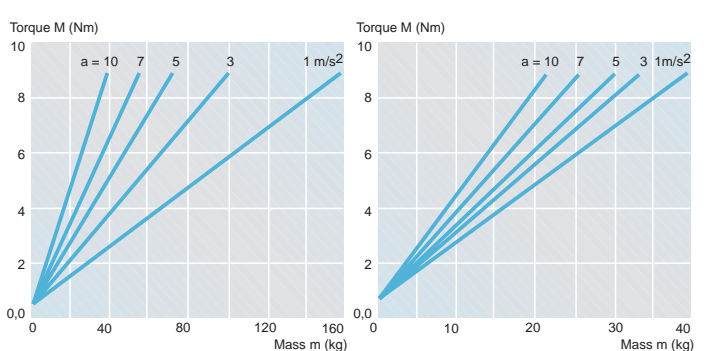

### Maximum support distance

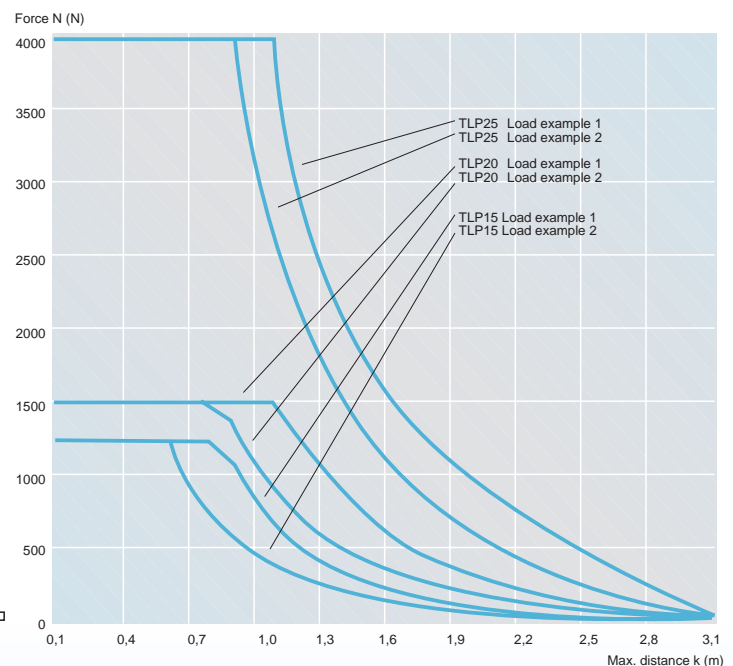

# The contact page ...you can count on us



**Manuela Neher,  
Brigitte Wild**  
Telefon office  
Call number  
Tel. +7361/920-0



**Petra Schramek**  
Quotations  
Call number +7361/920-112  
P.Schramek@franke-gmbh.de



**Alexandra Stoll**  
Orders  
Call number +7361/920-121  
info@franke-gmbh.de



**Christiane Frank**  
Quotations  
Call number +7361/920-117  
C.Frank@franke-gmbh.de



**Heike Faustmann**  
Quotations  
Call number+7361/920-182  
H.Faustmann@franke-gmbh.de



**Heike Beck**  
Sales  
Call number +7361/920-111  
H.Beck@franke-gmbh.de



**Sandra Tampe**  
Organisation dispatch  
Call number +7361/920-118  
S.Tampe@franke-gmbh.de



**Sascha Eberhard**  
Technical sales  
Call number +7361/920-114  
S.Eberhard@franke-gmbh.de



**Mario Tober**  
Technical sales  
Call number+7361/920-113  
M.Tober@franke-gmbh.de



**Stefan Kuhn**  
Positioning systems  
Call number 07361/920-180  
S.Kuhn@franke-gmbh.de

## "Welcome to Franke"

Our service team is at your disposal from the inquiry to the delivery. Competent staff members provide a trouble-free handling of your orders. Should you for once not be satisfied please let us know. We shall look after your problems.

### Our team for inquiries, quotations, orders for antifriction bearings, linear guides

In the distribution department many strings come together. Our team is willing to give you the best service possible.

Advicing, calculating, taking up and passing on of questions, keeping contact, informing, co-operating, coordinating, checking, correcting, supervising..... all that in a friendly tone.

Please contact our specialists. We shall be glad to do our best to handle your questions, problems and desires. Tell us what we can do for you.



## Looking ahead with well defined aims

The management of the Franke GmbH is leading the enterprise with clear strategies and responsibility. The leading heads from the left to the right:

- Gerhard Groz** (managing director)
- Siegfried Balle** (managing clerk, purchase)
- Harald Müller** (managing clerk, production)
- Günter Fischer** (managing clerk, distribution)
- Jörg Egelhaaf** (managing clerk, marketing)
- Michael Helbig** (managing director)



## Customer service Mounting/Maintenance

Do you need technical assistance at your place? No problem. Our maintenance men and technicians are glad to help you. They give you hints for handling and fitting of our components and are prepared to lend you a helping hand. Our service shall be to your full satisfaction from the very beginning.

visit our websites...

[www.franke-gmbh.com](http://www.franke-gmbh.com)  
[www.franke-bearings.com](http://www.franke-bearings.com)


## Download



In our download area you can find:

- this general catalogue as pdf-files
- a selection of dxf-files for your CAD-system
- calculation programmes to select the right bearing our guide size

## eShop

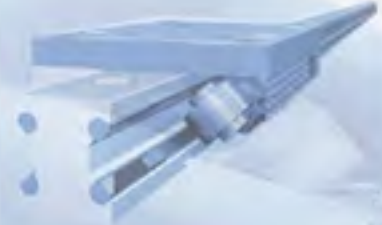

In our e-shop for aluminium roller guides you can select the suitable guide size easily and place an order or inquiry. Interactive drawings and step-by-step-menus guide you through the site.


## up to date information and costumer service

Our homepage [www.franke-gmbh.com](http://www.franke-gmbh.com) provides you with many useful features. The contact side will show you the people you can get in touch with, the list of representatives all over the world and how to reach our facilities.


[www.franke-bearings.com](http://www.franke-bearings.com) will tell you more about the invention of the wire race bearing and what the special features of this kind of bearings are.



Item No.	Designation	Material	Width	Height	Weight	Price
1001	FEA Einrechenlager	Al	15	11	40	10,50
1002	FEA Polerschleife	Al	15	200	11	10,50

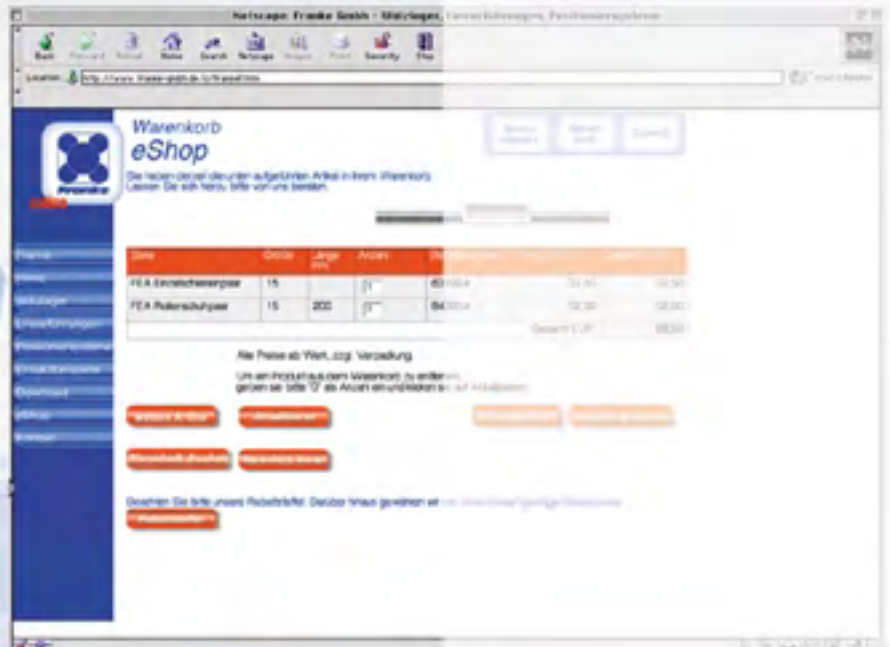

A7  
Exit  
Aalen / Westhausen

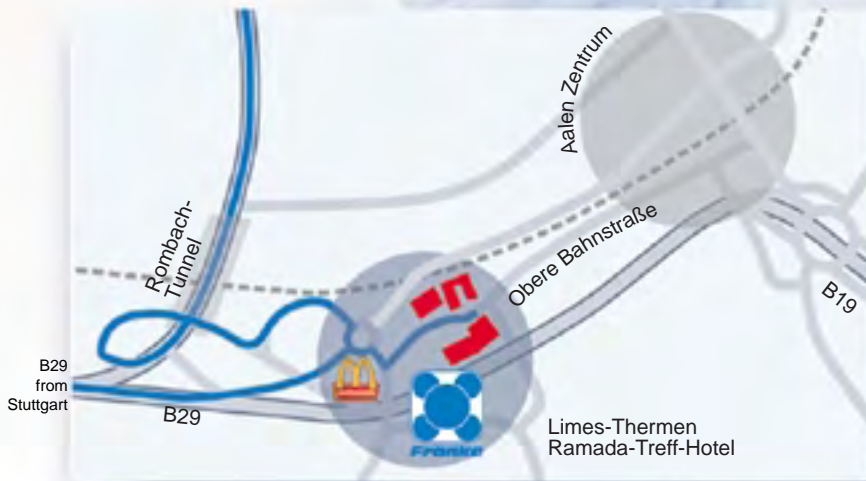

## How to find us ...

From the A 7 exit Westhausen ... turn in the direction of Aalen (B29), after ca. 8 kilometers you will drive through the Rombach-tunnel. Turn right after the tunnel and then left direction "Zentrum". You will reach a roundabout where you take the second exit in direction to the Jet-fuel-station. After 50m you turn left and will find Franke around 300m down the road.

A7  
Exit  
Aalen / Oberkochen

From Stuttgart take highway B 29 to Aalen, follow the signs in the direction "Zentrum". You will reach a roundabout where you take the exit in direction to the Jet-fuel-station. After 50m you turn left and will find Franke around 300m down the road.