


For New Technology Network

NTN[®]

NTN corporation


Bearing Units Steel Series

CAT. No. 3902/E

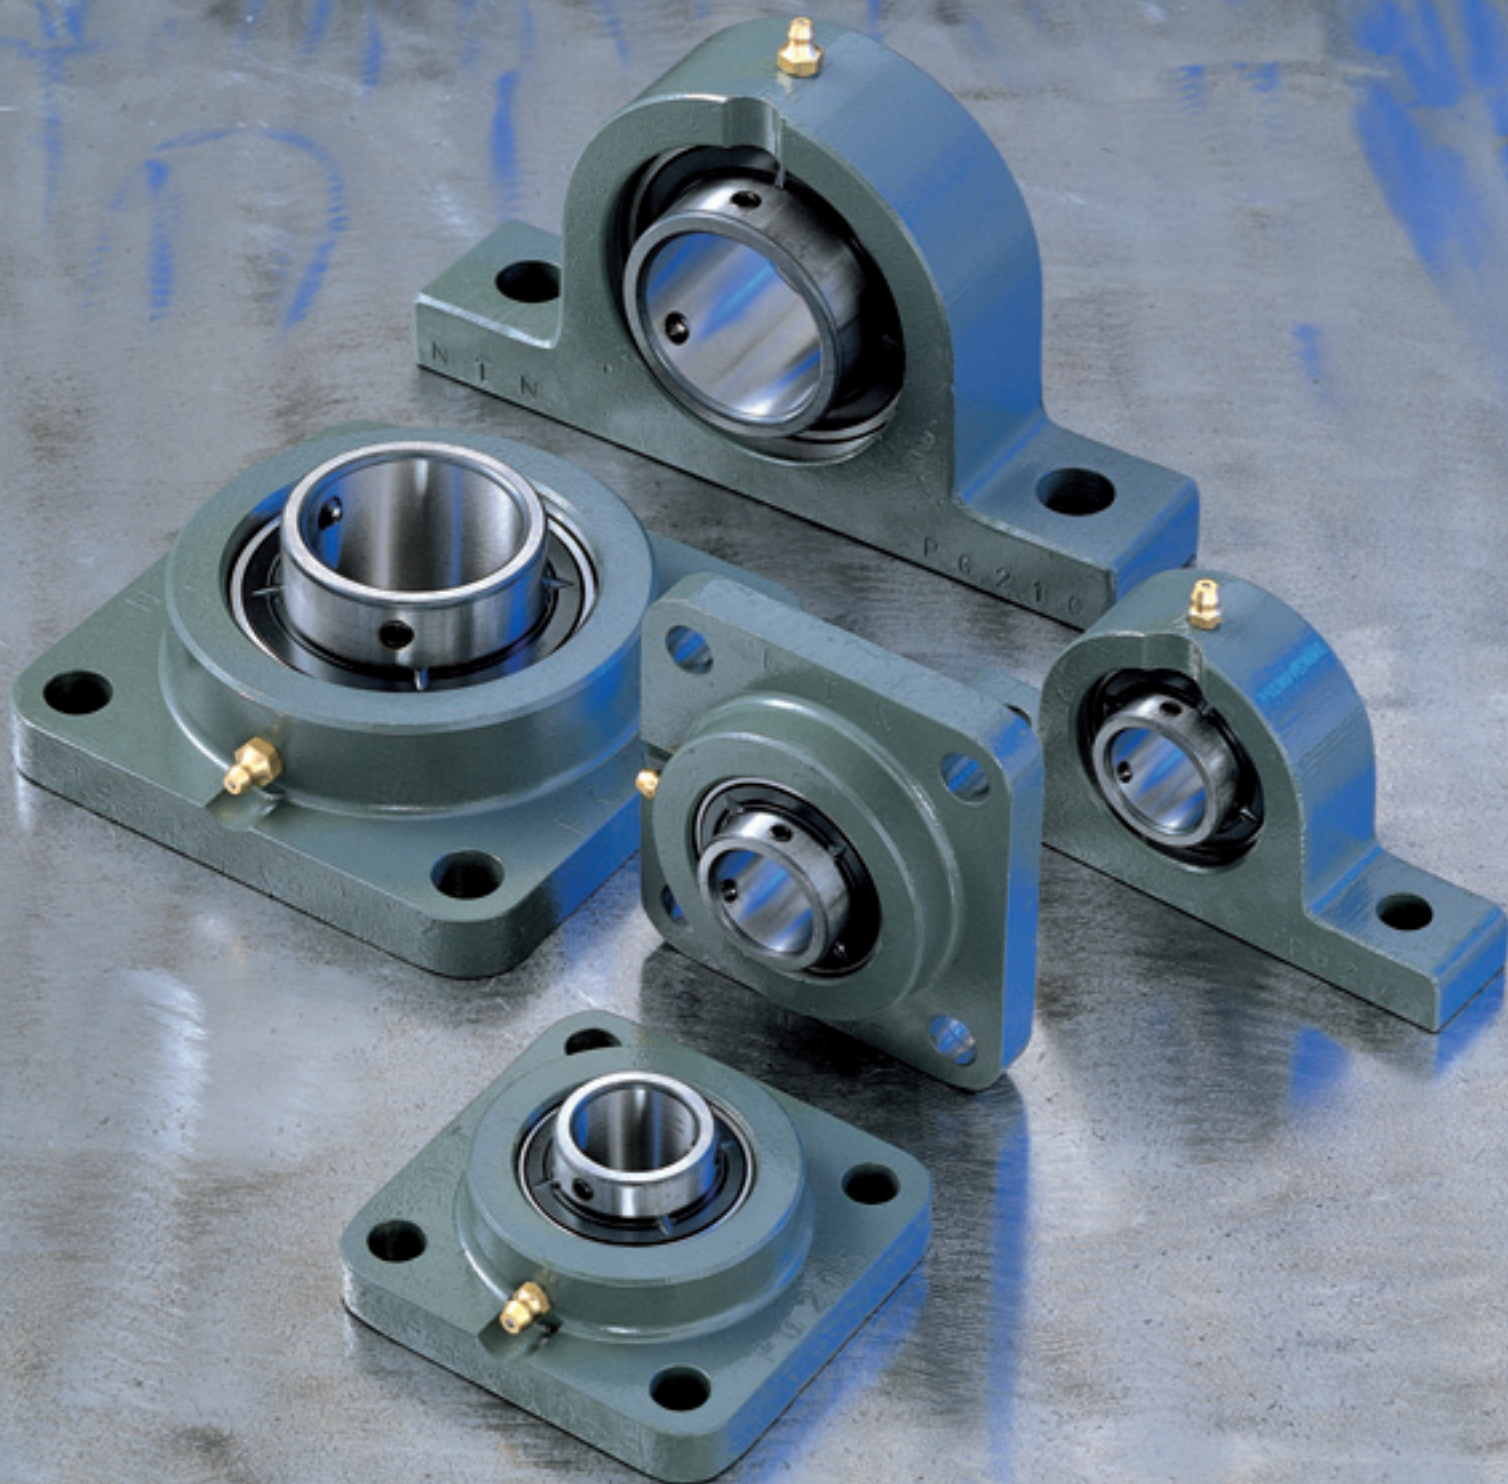

Pillow Block Unit; UCPG2 series

Cylindrical bore with set screw

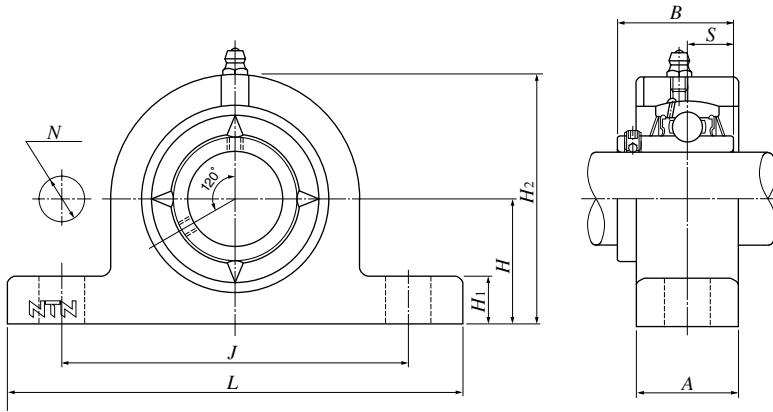


Bore dia. mm	Part number	Boundary dimensions mm									Nominal bolt dia.	Insert bearing number	Basic dynamic rated load kN C _r	Basic static rated load kN C _{0r}	Housing part number	Mass kg (Ref.)
		H	L	J	A	N	H ₁	H ₂	B	S						
12	UCPG201D1	30.2	127	95	25	12	14	62	31	12.7	M10	UC201D1	12.8	6.65	PG203D1	0.7
15	UCPG202D1							UC202D1								
17	UCPG203D1							UC203D1								
20	UCPG204D1	33.3	65	UC204D1	PG204D1											
25	UCPG205D1	36.5	140	105	30	15	71	34	14.3	UC205D1		14.0	7.85	PG205D1	0.8	
30	UCPG206D1	42.9	165	121	35	17	17	83	38.1	15.9	M14	UC206D1	19.5	11.3	PG206D1	1.3
35	UCPG207D1	47.6	167	127			18	93	42.9	17.5		UC207D1	25.7	15.3	PG207D1	1.6
40	UCPG208D1	49.2	184	137			98	49.2	19	UC208D1		29.1	17.8	PG208D1	1.9	
45	UCPG209D1	54	190	146	20					106		UC209D1	32.5	20.4	PG209D1	2.2
50	UCPG210D1	57.2	206	159	45		19	21	114	51.6	M16	UC210D1	35.0	23.2	PG210D1	2.6
55	UCPG211D1	63.5	219	171		23		126	55.6	22.2		UC211D1	43.5	29.2	PG211D1	3.3
60	UCPG212D1	69.8	241	184		138		65.1	25.4	UC212D1		52.5	36.0	PG212D1	4.6	
65	UCPG213D1	76.2	265	203	27					151		UC213D1	57.5	40.0	PG213D1	5.9
70	UCPG214D1	79.4	266	210		55		157	74.6	30.2	M20	UC214D1	62.0	44.0	PG214D1	6.6
75	UCPG215D1	82.6	275	217			24	28	163	77.8		33.3	UC215D1	66.0	49.5	PG215D1
80	UCPG216D1	88.9	292	232	30			175	82.6	UC216D1			72.5	53.0	PG216D1	9.0
85	UCPG217D1	95.2	310	247		60		32	187	85.7			34.1	UC217D1	83.5	64.0
90	UCPG218D1	101.6	327	262	65		26				33	200		96	39.7	M22

Note)

1. Stamped steel or cast iron dust covers are also available upon request.
2. Refer to catalog 2400.
3. Ball bearing tolerances according to JIS B 1558.
4. Housing tolerances according to JIS B 1559.

Pillow Block Unit; UCPG3 series

Cylindrical bore with set screw

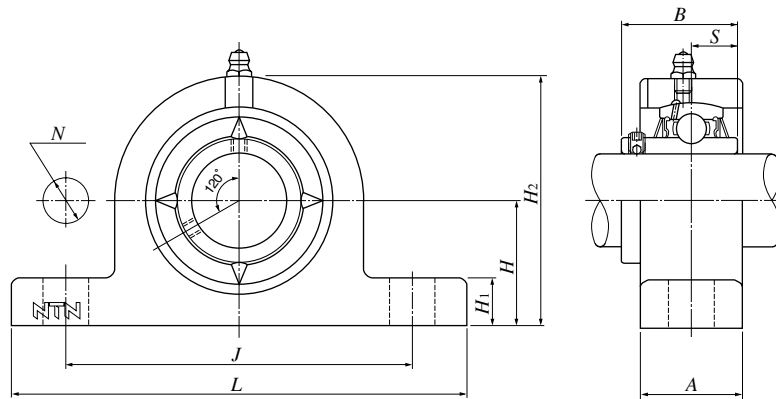



Bore dia. mm	Part number	Boundary dimensions mm									Nominal bolt dia.	Insert bearing number	Basic dynamic rated load kN C _r	Basic static rated load kN C _{0r}	Housing part number	Mass kg (Ref.)	
		H	L	J	A	N	H ₁	H ₂	B	S							
25	UCPG305D1	45	175	132	35	17	15	85	38	15	M14	UC305D1	21.2	10.9	PG305D1	1.4	
30	UCPG306D1	50	180	140			18	95	43	17		UC306D1	26.7	15.0	PG306D1	1.8	
35	UCPG307D1	56	210	160			40	20	106	48		19	UC307D1	33.5	19.1	PG307D1	2.8
40	UCPG308D1	60	220	170			45	22	116	52			UC308D1	40.5	24.0	PG308D1	3.0
45	UCPG309D1	67	245	190	50	19	24	129	57	22	M16	UC309D1	53.0	32.0	PG309D1	4.1	
50	UCPG310D1	75	275	212	55		27	143	61			UC310D1	62.0	38.5	PG310D1	5.8	
55	UCPG311D1	80	310	236	60		30	154	66	25		UC311D1	71.5	45.0	PG311D1	7.4	
60	UCPG312D1	85	330	250	65	24	32	165	71	26	M20	UC312D1	82.0	52.0	PG312D1	9.4	
65	UCPG313D1	90	340	260			33	176	75	30		UC313D1	92.5	60.0	PG313D1	10	
70	UCPG314D1	95	360	280	75	26	35	187	78	33	M22	UC314D1	104	68.0	PG314D1	12	
75	UCPG315D1	100	380	290				198	82	32		UC315D1	113	77.0	PG315D1	14	
80	UCPG316D1	106	400	300			40	210	86	34		UC316D1	123	86.5	PG316D1	18	
85	UCPG317D1	112	420	320	80	32		220	96	40	M27	UC317D1	133	97.0	PG317D1	20	
90	UCPG318D1	118	430	330			235	UC318D1				143	107	PG318D1	24		
95	UCPG319D1	125	470	360	90	35	45	250	103	41	M30	UC319D1	153	119	PG319D1	29	
100	UCPG320D1	140	490	380				50	275	108		42	UC320D1	173	141	PG320D1	35
105	UCPG321D1						280		112	44		UC321D1	184	153	PG321D1		
110	UCPG322D1	150	520	400	100	38	55	300	117	46	M33	UC322D1	205	179	PG322D1	45	
120	UCPG324D1	160	570	450			65	320	126	51		UC324D1	207	185	PG324D1	55	
130	UCPG326D1	180	600	480			75	355	135	54		UC326D1	229	214	PG326D1	72	
140	UCPG328D1	200	620	500	110			390	145	59		UC328D1	253	246	PG328D1	89	

Note)

1. Stamped steel or cast iron dust covers are also available upon request.
2. Refer to catalog 2400.
3. Ball bearing tolerances according to JIS B 1558.
4. Housing tolerances according to JIS B 1559.

Square Flange Unit; UCFG2 series

Cylindrical bore with set screw

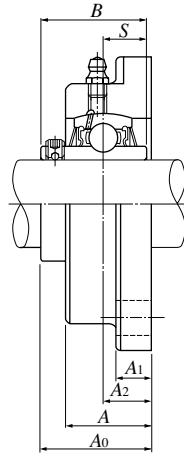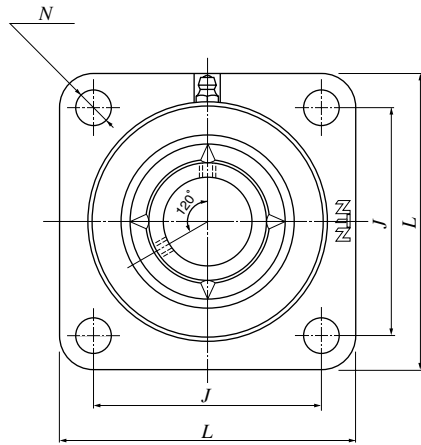

Bore dia. mm	Part number	Boundary dimensions mm									Nominal bolt dia.	Insert bearing number	Basic dynamic rated load kN C _r	Basic static rated load kN C _{0r}	Housing part number	Mass kg (Ref.)
		L	J	A ₂	A ₁	A	N	A ₀	B	S						
12	UCFG201D1	86	64	15	11	25.5	12	33.3	31	12.7	M10	UC201D1	12.8	6.65	FG204D1	0.7
15	UCFG202D1											UC202D1				
17	UCFG203D1											UC203D1				0.6
20	UCFG204D1											UC204D1				
25	UCFG205D1	95	70	16	13	27	14	35.7	34	14.3	M12	UC205D1	14.0	7.85	FG205D1	0.8
30	UCFG206D1	108	83	18		31		40.2	38.1	15.9		UC206D1	19.5	11.3	FG206D1	1.0
35	UCFG207D1	117	92	19	15	34	16	44.4	42.9	17.5	M14	UC207D1	25.7	15.3	FG207D1	1.4
40	UCFG208D1	130	102	21		36		51.2	49.2	19		UC208D1	29.1	17.8	FG208D1	1.8
45	UCFG209D1	137	105	22	16	38	52.2	M16				UC209D1	32.5	20.4	FG209D1	2.2
50	UCFG210D1	143	111			40	54.6		51.6			UC210D1	35.0	23.2	FG210D1	2.4
55	UCFG211D1	162	130	25	18	43	19	58.4	55.6	22.2	M16	UC211D1	43.5	29.2	FG211D1	3.6
60	UCFG212D1	175	143	29		48		68.7	65.1	25.4		UC212D1	52.5	36.0	FG212D1	4.4
65	UCFG213D1	187	149	30	22	50	69.7	33.3				M20	UC213D1	57.5	40.0	FG213D1
70	UCFG214D1	193	152	31		54	75.4		74.6	30.2			UC214D1	62.0	44.0	FG214D1
75	UCFG215D1	200	159	34		56	78.5		77.8	33.3	UC215D1		66.0	49.5	FG215D1	6.9
80	UCFG216D1	208	165			58	83.3	82.6	UC216D1		72.5	53.0	FG216D1	8.1		
85	UCFG217D1	220	175	36	24	63	23	87.6	85.7	34.1	M20	UC217D1	83.5	64.0	FG217D1	9.3
90	UCFG218D1	235	187	40		68		96.3	96	39.7		UC218D1	96.0	71.5	FG218D1	11

Note)

1. Stamped steel or cast iron dust covers are also available upon request.
2. Refer to catalog 2400.
3. Ball bearing tolerances according to JIS B 1558.
4. Housing tolerances according to JIS B 1559.

NTN Rolled Steel Housings Ensure A Safer Design

1. Features

Superior Housing Strength

Made of precision gas cut rolled steel, NTN steel housings offer superior strength characteristics when compared to cast iron and cast steel housings.

Consistent Microstructure

The rolled steel microstructure is more consistent than cast iron or cast steel, reducing the risk of housing fracture under severe conditions.

Interchangeability

Roller steel housing dimensions are consistent with cast units, allowing them to be interchanged with NTN standard housings and other manufacturers ISO standard.


2. Bearing housing material

The bearing housings use material classified as SS400 of JIS G 3101 (Rolled Steel for General Structures). The table below lists the material's general mechanical properties.

Class code	Tension test				
	Steel thickness mm	Yield strength N/mm ²	Tensile strength N/mm ²	Elongation	
				Sample piece	%
SS400	Thickness from 16 to 40	235 or more	400~510	No. 1A	21 or more
	Thicker than 40	215 or more		No. 4	23 or more

3. Allowable load for bearing housings

The allowable load for rolled steel housings is approximately 5 times the insert bearing's dynamic capacity. In most applications the load is transmitted through the bearing into the housing. As shown below, the static fracture strength of NTN rolled steel housings is considerably higher than that of cast iron and cast steel housings.

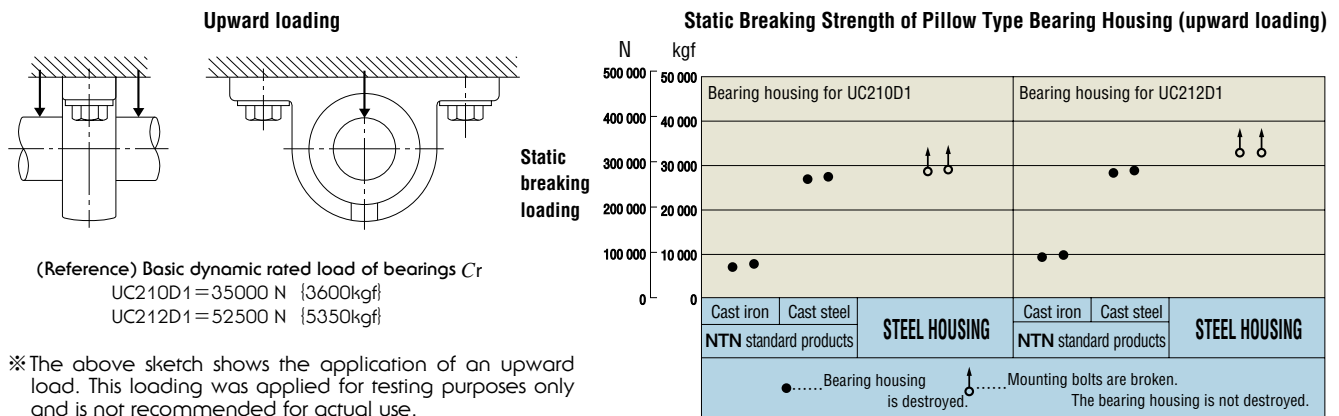

4. Applications

NTN rolled steel housings provide superior strength to cast steel and cast iron. Their ability to resist impact loads makes them suitable for applications involving heavy loads and vibration. Possible applications for NTN rolled steel housings include but are not limited to conveyors, trucks and overhead cranes at steel mills, mining machinery and pollution control equipment.

- Care should be taken when loads do not act through the base of the housing. For applications where loads are acting axially or at a 45 degree angle, an external retainer may be needed to prevent the housing from moving.
- The grease nipple is not installed prior to shipment to prevent breaking. It should be installed prior to using the unit.
- Other housing configurations, such as the 300 series square flange, the thick pillow block, the diamond shaped flange, the piloted round flange, the piloted square flange and the take-up type units are available. Stamped steel or cast iron dust covers are also available upon request. Ask your NTN representative about these available options.